

**REVISED DRAFT**  
**USER'S GUIDE FOR THE**  
**AERMOD TERRAIN PREPROCESSOR (AERMAP)**

U.S. ENVIRONMENTAL PROTECTION AGENCY  
Office of Air Quality Planning and Standards  
Emissions, Monitoring, and Analysis Division  
Research Triangle Park, North Carolina 27711

November 1998

Revised Draft - 4/24/03

## NOTICE

This user's guide is a draft document and should not be cited or quoted. It has not been subject to policy or technical review by the U.S. Environmental Protection Agency and should not at this stage be construed to represent Agency policy. Mention of trade names, products, or services does not convey, and should not be interpreted as conveying official EPA approval, endorsement, or recommendation.

The following trademarks appear in this guide:

UNIX is a registered trademark of The Open Group

Linux is a registered trademark of Linus Torvalds

Visual Fortran is a registered trademark of Compaq Computer Corporation

Pentium is a registered trademark of Intel, Inc.

IBM is a registered trademark of International Business Machines.

Windows is a registered trademark of Microsoft Corporation.

WINZIP is a registered trademark of Nico Mak Computing, Inc.

## **PREFACE**

The U. S. Environmental Protection Agency (EPA), in conjunction with the American Meteorological Society (AMS), has developed a new air quality dispersion model, the AMS/EPA Regulatory Model (AERMOD). AERMOD is a modeling system which contains: 1) an air dispersion model, 2) a meteorological data preprocessor called AERMET, and 3) a terrain data preprocessor called AERMAP. This user's guide focuses on the AERMAP portion of the AERMOD modeling system.

This User's Guide for the AMS/EPA Regulatory Model Terrain Pre-processor (AERMAP), provides technical descriptions and user instructions. Output from AERMAP is used as receptor and source elevation data input to the AERMOD control file. The elevation data are used by AERMOD when calculating air pollutant concentrations.

## ACKNOWLEDGMENTS

The User's Guide for AERMAP has been prepared by Pacific Environmental Services, Inc., Research Triangle Park, North Carolina. This effort was funded by the U.S. Environmental Protection Agency under Contract Nos. 68D30032 and 68D30001, with Russell F. Lee and Warren D. Peters as Work Assignment Managers. This user's guide has been modified by Peter Eckhoff of the U.S. Environmental Protection Agency, Research Triangle Park, North Carolina.

# CONTENTS

PREFACE .....	iii
ACKNOWLEDGMENTS .....	iv
FIGURES .....	vii
TABLES .....	viii
1.0 INTRODUCTION .....	1-1
1.1 OVERVIEW .....	1-1
1.2 INPUT DATA REQUIREMENTS .....	1-2
1.3 COMPUTER HARDWARE REQUIREMENTS .....	1-4
2.0 OVERVIEW OF THE AERMAP TERRAIN PREPROCESSOR .....	2-1
2.1 KEYWORD/PARAMETER APPROACH .....	2-1
2.2 BASIC CONCEPTS .....	2-3
2.2.1 Modeling Domain .....	2-3
2.2.2 Receptors .....	2-5
2.2.3 Terrain Data Files .....	2-6
2.2.4 Horizontal Datums .....	2-7
2.3 AN EXAMPLE AERMAP INPUT FILE .....	2-9
2.3.1 Selecting Preprocessing Options - CO Pathway .....	2-9
2.3.2 Specifying a Receptor Network - RE Pathway .....	2-12
2.3.3 Specifying the Output File - OU Pathway .....	2-14
2.4 RUNNING AERMAP .....	2-15
2.5 SIZE LIMITATIONS AND CREATING A NEW EXECUTABLE .....	2-17
3.0 DETAILED KEYWORD REFERENCE .....	3-1
3.1 OVERVIEW .....	3-1
3.2 CONTROL PATHWAY INPUTS AND OPTIONS .....	3-2
3.2.1 Title Information .....	3-2
3.2.2 Options for Elevated Terrain .....	3-3

3.2.3	Flagpole Receptor Height Option .....	3-3
3.2.4	Terrain Data Type Specifications .....	3-4
3.2.5	Terrain Data File Names Specifications .....	3-4
3.2.6	Domain Extent Specifications .....	3-5
3.2.7	Anchor Location Specifications .....	3-5
3.2.8	To Run or Not to Run - That is the Question .....	3-8
3.3	SOURCE PATHWAY INPUTS AND OPTIONS (OPTIONAL) .....	3-8
3.4	RECEPTOR PATHWAY INPUTS AND OPTIONS .....	3-9
3.4.1	Defining Networks of Gridded Receptors .....	3-10
3.4.1.1	Cartesian Grid Receptor Networks. ....	3-10
3.4.1.2	Polar Grid Receptor Networks. ....	3-14
3.4.2	Using Multiple Receptor Networks .....	3-17
3.4.3	Specifying Discrete Receptor Locations .....	3-18
3.4.3.1	Discrete Cartesian Receptors. ....	3-18
3.4.3.2	Discrete Polar Receptors. ....	3-19
3.4.3.3	Discrete Cartesian Receptors for EVALFILE Output. ....	3-20
3.5	OUTPUT PATHWAY INPUTS AND OPTIONS .....	3-21
4.0	TECHNICAL DESCRIPTION .....	4-1
4.1	DETERMINING RECEPTOR HEIGHT SCALES .....	4-1
4.2	DIGITAL ELEVATION MODEL (DEM) DATA .....	4-2
4.3	DATA MANIPULATION BY AERMAP .....	4-21
4.4	DETERMINING RECEPTOR ELEVATIONS .....	4-21
5.0	REFERENCES .....	5-1
APPENDIX A. ALPHABETICAL KEYWORD REFERENCE .....		A-1
APPENDIX B. FUNCTIONAL KEYWORD/PARAMETER REFERENCE .....		B-1
APPENDIX C. EXPLANATION OF ERROR MESSAGE CODES .....		C-1
C.1	INTRODUCTION .....	C-1
C.2	THE OUTPUT ERROR LOG MESSAGE SUMMARY .....	C-1
C.3	DESCRIPTION OF THE DETAILED MESSAGE LAYOUT .....	C-2
C.4	DETAILED DESCRIPTION OF THE ERROR/MESSAGE CODES .....	C-4



## FIGURES

<u>Figure</u>	<u>Page</u>
2-1. Relationship Among the DEM Files, the Domain, Sources and Receptors . . . . .	2-3
2-2. Relationship of Receptor Slope Line to DEM Terrain Nodes and the DEM and Domain Boundaries . . . . .	2-4
2-3. Example AERMAP Output File for the Sample Problem . . . . .	2-17
4-1. Structure of a 7.5-minute DEM Data File . . . . .	4-4
4-2. Structure of a 1-degree DEM Data File . . . . .	4-6

## TABLES

<u>Table</u>	<u>Page</u>
4-1. DEM Data Elements - Logical Record Type A .....	4-7
4-2. DEM Data Elements - Logical Record Type B .....	4-19
B-1. DESCRIPTION OF CONTROL PATHWAY KEYWORDS .....	B-3
B-2. DESCRIPTION OF CONTROL PATHWAY KEYWORDS AND PARAMETERS ...	B-4
B-3. DESCRIPTION OF SOURCE PATHWAY KEYWORDS .....	B-5
B-4. DESCRIPTION OF SOURCE PATHWAY KEYWORDS AND PARAMETERS ....	B-6
B-5. DESCRIPTION OF RECEPTOR PATHWAY KEYWORDS .....	B-7
B-6. DESCRIPTION OF RECEPTOR PATHWAY KEYWORDS AND PARAMETERS .....	B-8
B-7. DESCRIPTION OF OUTPUT PATHWAY KEYWORDS .....	B-10
B-8. DESCRIPTION OF OUTPUT PATHWAY KEYWORDS AND PARAMETERS ...	B-11
C-1. EXAMPLE OF AN AERMAP MESSAGE SUMMARY .....	C-2

## **1.0 INTRODUCTION**

The U. S. Environmental Protection Agency (EPA), in conjunction with the American Meteorological Society (AMS), has developed a new air quality dispersion model, the AMS/EPA Regulatory Model (AERMOD). AERMOD is designed to calculate air pollutant concentrations in all types of terrain, from flat prairie to complex mountainous situations. AERMOD does not process its own terrain. A preprocessor program, AERMAP, has been developed to process this terrain data in conjunction with a layout of receptor and sources to be used in AERMOD control files.

Terrain data is available, in the United States, from the United States Geological Survey and commercial sources in the form of computer data files. The data has been standardized to several types of maps and data formats. AERMAP has been designed to process these standardized data to produce terrain elevations for each receptor and source and a receptor hill height values for use with complex terrain. AERMAP outputs the results in a format that can easily be cut and pasted into an AERMOD control file.

The remainder of this section provides an overall introduction to the AERMAP terrain preprocessor including the basic input data and the hardware requirements. In Section 2, a brief tutorial demonstrates the basic requirements to run AERMAP, while in Section 3, a detailed description of each of the keywords is presented. A discussion of the technical aspects of obtaining the height scale is presented in Section 4.

### **1.1 OVERVIEW**

Regulatory dispersion models applicable to complex terrain situations require information about the surrounding terrain. This information can range from a grid of terrain elevations, such as in the Industrial Source Complex Short Term (ISCST3) dispersion model (EPA, 1995) and Rough Terrain Diffusion Model (Environmental Research and Technology, 1987), to three-dimensional terrain contour information as in CTDMPPLUS (Perry, et al., 1989). In an effort to reduce the demand for large input data sets, AERMOD was designed to capture the essential physics of dispersion in complex terrain

through the use of a separate height scale for each receptor. With the assumption that terrain will affect air quality concentrations at individual receptors, AERMAP first determines the elevation at each receptor and source and then searches for the terrain height and location that has the greatest influence on dispersion for an individual receptor. This height is referred to as the height scale.

## **1.2 INPUT DATA REQUIREMENTS**

There are two basic types of input data that are needed to run AERMAP. AERMAP requires an input runstream file that directs the actions of AERMAP through a set of options, and defines the receptor and source locations. The structure and syntax of an AERMAP input runstream file is based on the same pathways and keyword structures as in the control runstream files for AERMOD.

The second type of input data needed to run AERMAP is Digital Elevation Model (DEM) data. DEM data are computer files of evenly spaced terrain elevation points called nodes. Each DEM file covers a standardized section based on latitude and longitude coordinates. These data files are obtainable through several commercial internet sites and the United States Geological Survey (USGS). Several sites, as of this writing, are offering “free” downloads of the USGS’s relatively new Spatial Data Transfer Standard (SDTS) formatted DEM data files. Data in the old “native” DEM format are still available. This note has appeared on the USGS web site:

“All USGS 1:24,000-Scale (7.5-minute) Digital Elevation Model data in the Spatial Data Transfer Standard (SDTS) format are now available at no cost via Web downloads from the GeoComm International Corporation(<http://www.gisdatadepot.com/dem/>).”

DEM data can be obtained in several different resolutions. Currently AERMAP supports both the 7.5-minute and 1-degree DEM data resolutions. The 1-degree DEM files are available through the Internet and via anonymous ftp from the USGS Internet site at <http://edcftp.cr.usgs.gov>. The 7.5-

minute DEM data may be purchased from the USGS or one of the internet sites. Users should check the USGS website for the current status on availability of these data.

The 1-degree DEM data are produced by the Defense Mapping Agency (DMA) in 1-degree by 1-degree units that correspond to the east or west half of 1:250,000 scale USGS topographic quadrangle map series. These data are complete and available for the entire contiguous United States, Hawaii, and portions of Alaska, Puerto Rico and the Virgin Islands. A file consists of a regular array of elevations referenced horizontally on the latitude/longitude coordinate system of the World Geodetic System (WGS). The array consists of profiles of terrain elevations, where a profile is a series of elevation points, or nodes, arranged from south to north for one longitude. Each profile for the 1-degree data has a constant number of elevation points. The horizontal spacing between each data point is 3 arc-seconds - the east-west distance is therefore latitude dependent and corresponds to about 70 - 90 meters for the North American continent. The elevations are expressed in meters. The 1-degree DEM data have an absolute accuracy of 130 meters horizontally and 30 meters vertically (U.S. Dept. of Interior, 1993).

The 7.5-minute DEM data have been produced from digitized map contours or from manual or automated scanning of aerial photographs. Each 7.5-minute DEM data file corresponds to a single 1:24,000-scale map quadrangle. The 7.5-minute DEM data is available for selected areas, with emphasis on areas with more significant terrain relief. A 7.5-minute DEM data file consists of a regular array of elevations referenced horizontally in the Universal Transverse Mercator (UTM) coordinate system, with a uniform horizontal spacing of 30 meters. The desired accuracy standard for 7.5-minute DEM's is a vertical root-mean-square error (RMSE) of 7 meters (U.S. Dept. of Interior, 1993). 7.5-minute DEM data is now available for most areas of the country.

### 1.3 COMPUTER HARDWARE REQUIREMENTS

The current revision to the AERMAP terrain preprocessor was developed on an IBM-compatible personal computer (PC) using Compaq Visual Fortran Compiler (Version 6.6). AERMAP has been designed to run on a PC with a Pentium class or higher central processing unit (CPU) chip, a minimum of 64 MB of RAM, and Windows 95 or higher Windows operating system. However, the program was written to be Fortran compliant and therefore should be recompilable on other types of computer systems such as DOS, UNIX or Linux based systems.

The amount of hard disk drive storage space required for a particular application will depend on the number and type of raw terrain (DEM) data files required to encompass the study area. A single 7.5-minute DEM file requires about 1.1 MB of space, while a single 1-degree DEM file requires about 10 MB of space. Additional hard disk drive space will be needed to store 7.5 minute SDTS formatted DEM data which requires about 110KB of space per file. SDTS data needs to be converted to the old DEM format. Each conversion of an SDTS file produces a natively formatted DEM file of about 1.1 MB. A conversion program, SDTS2DEM, is located on the Support Center for Regulatory Air Models web site at <http://www.epa.gov/scram0001>.

AERMAP processes a 100 km x 100 km domain which includes about 80 7.5-minute DEM files and 360 receptors in less than 32 minutes on 733 Mhz Pentium III computer. AERMAP processes the 80 DEM files in about 5 minutes and processes the 360 receptors in about 26.5 minutes.

## 2.0 OVERVIEW OF THE AERMAP TERRAIN PREPROCESSOR

This section presents the basic concepts, including the keyword approach, of the AERMAP preprocessor used in generating the runstream (control) file and a short tutorial on creating a simple AERMAP run.

### 2.1 KEYWORD/PARAMETER APPROACH

The input runstream file needed to run the AERMAP preprocessor is based on an approach that uses descriptive keywords and parameters, and allows for a flexible structure and format. A brief overview of the approach is provided here. A complete description of this approach can be found in the AERMOD User's Guide (EPA, 1998).

The input runstream file is divided into four functional "pathways." These pathways are identified by two-character identifiers at the beginning of each record in the runstream. The pathways for AERMAP are:

- CO** - for specifying overall job **CO**ntrol options;
- SO** - for specifying the **SO**urce location information (optional);
- RE** - for specifying the **RE**ceptor information; and
- OU** - for specifying the **OU**tput file information.

The optional source pathway may be used to specify source locations for the purpose of extracting source elevations from the DEM data and/or for specifying the origin of discrete or gridded polar receptors.

Each line, or image, in the input runstream consists of a pathway identifier, an eight-character keyword and a parameter list. The keywords and parameters that make up an input runstream file can be thought of as a command language through which the user communicates with the preprocessor what is to be accomplished for a particular run. The keywords specify the type of option or

input/output data and the parameters following the keyword define the specific options or actual file names.

There are several rules of syntax for structuring an input runstream. Briefly, they are:

- 1) All inputs for a particular pathway must be contiguous;
- 2) Each record in the runstream file must be 132 characters or less, which includes the pathway, the keyword and any parameters;
- 3) Alphabetic characters can be input as either upper or lower case because AERMAP converts all character input to upper case internally (except for the title parameters and filenames);
- 4) Several keywords are mandatory and must be present in every runstream file;
- 5) With a few exceptions, the order of the keywords is not critical;
- 6) Blank lines can be used to improve readability; asterisks in the first two columns (the pathway field) identify the record as a comment.

## **2.2 BASIC CONCEPTS**


AERMAP relies on the Universal Transverse Mercator (UTM) coordinate system to identify the location of sources and receptors. This coordinate system is one method of portraying the meridians and parallels of the earth's surface on a flat plane. The UTM system is comprised of zones, with each zone being 6° of longitude in width. UTM zones 11-19 cover the contiguous United States.

### **2.2.1 Modeling Domain**

*The AERMAP terrain preprocessor requires the user to define a modeling domain.* A modeling domain is defined as the area that contains all the receptors and sources being modeled with a buffer to accommodate any significant terrain elevations. This domain can span over multiple UTM zones and multiple adjacent DEM files provided by the user. The domain can be specified either in the UTM or the latitude/longitude coordinate system. The preprocessor converts the domain coordinates to the units of the DEM data, i.e., UTM when using 7.5-minute data and latitude/longitude when using the 1-degree data. The domain must be a quadrilateral in the same orientation as the DEM coordinates. Figure 2-1 illustrates the relationship among the DEM data files, the domain, and receptors.

Figure 2-1. Relationship Among the DEM Files, the Domain, Sources and Receptors.

Significant terrain elevations include all the terrain that is at or above a 10% slope from each

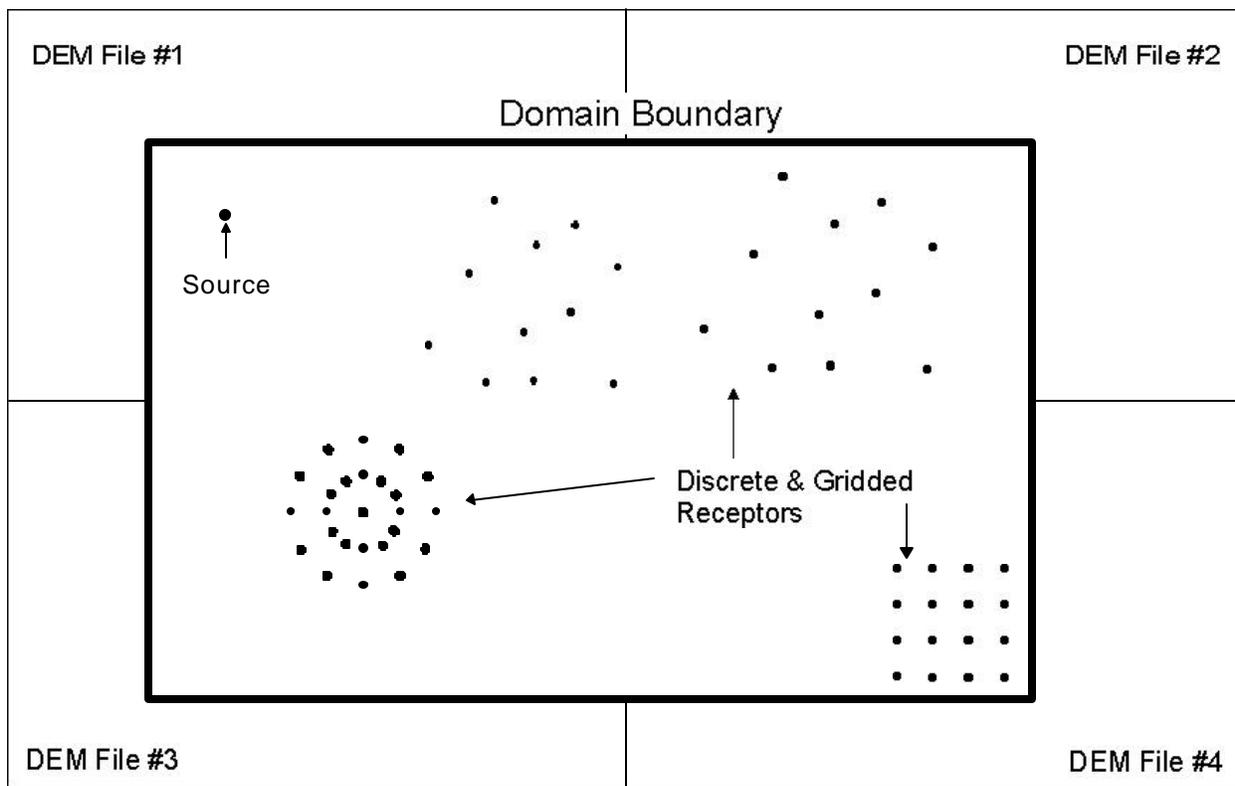


and every receptor. The highest terrain that breaks through the 10% slope is used in determining the hill height scale for that receptor. This is represented in Figure 2-2. Terrain nodes are points of evenly spaced elevation data found in a DEM files. In the figure, a terrain node on the left is above the 10% slope but outside the array of DEM files. An additional DEM file is needed to cover this node and the

domain needs to be expanded to the right to include this node. It is up to the user to assure all such terrain nodes are covered.

Figure 2-2. Relationship of Receptor Slope Line to DEM Terrain Nodes and the DEM and Domain Boundaries.

During setup processing AERMAP checks all of the sources and receptors specified to ensure that they lie within the domain and within the area covered by the DEM files. AERMAP generates a

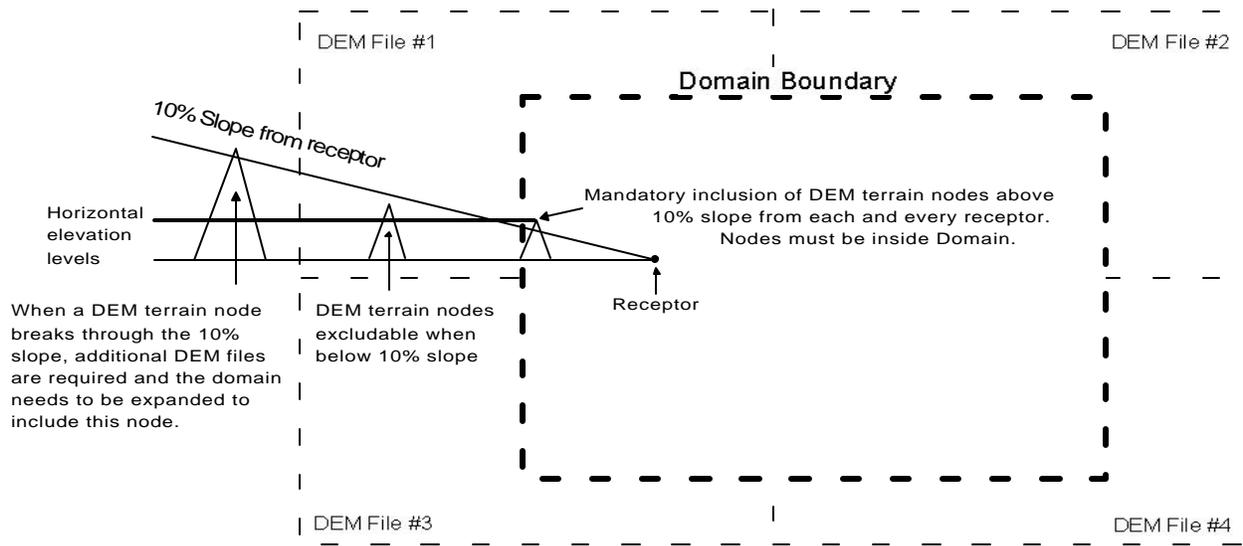

fatal error message and will stop before calculating elevations when:

- 1) a receptor or source is found to lie outside the domain,
- 2) a receptor or source is found to lie outside of the DEM files.

If the domain extends beyond the area covered by the DEM data, further processing will continue provided no fatal error messages are generated from the above two conditions. Smaller domains and fewer DEM files can decrease processing time.

### 2.2.2 Receptors

The receptors are specified in the AERMAP terrain preprocessor in a manner identical to the AERMOD dispersion model. AERMAP allows the user to specify discrete receptors as well as cartesian and polar grid networks. However, there are some special considerations for AERMAP.

In AERMOD, when specifying discrete polar receptors, it is necessary to specify the position of a “source” relative to which the receptor is assigned. The locations of these sources can be specified on the optional source pathway (see Section 3.3).

All the source and receptor coordinates are referenced to the ANCHOR coordinates. The ANCHOR coordinates are referenced to a set of UTM coordinates. The datum of the referenced UTM coordinates needs to be specified on the ANCHOR input line. A “0” specification, which is the equivalent of a “don’t know”, will cause the program to default to either NAD 27 (7.5 minute DEM data) or WGS 72 (1-degree DEM data) depending upon the setting of the DATATYPE.

The modeling domain can cross UTM zones. However, if the receptor locations are specified in UTM coordinates, then they must all be referenced to the same UTM zone. When using 7.5-minute DEM data, AERMAP will check for zone changes in the receptor network, and adjust the coordinates accordingly.

The user has the option to have AERMAP determine the base elevations for the receptors from the DEM data or to provide the receptor elevations. This option is set in the COntrol pathway. If the user requests AERMAP to determine the receptor base elevations from the DEM file(s) and provides the receptor elevations as well, the program will ignore the user input elevations. AERMAP determines the receptor elevation of each of the receptors by a distance-weighted two-dimensional interpolation of the elevation values at the four nearest DEM nodes surrounding the receptor location. The same procedure is applied to source elevations if source locations are identified.

If the user provides the receptor elevations, AERMAP will use these elevations rather than extracting them from the digital data. Note that the DEM files are required even if the user is providing the receptor heights because the DEM data are used to obtain the height scale for each receptor. If the user specifies the receptor elevations, they can be entered in either feet or meters. The output receptor elevations *will always be in meters*. If the user indicates that receptor heights are provided but does not have the receptor heights in the input file, then a height of 0 meters is written to the output file and a warning message will be generated.

### 2.2.3 Terrain Data Files

The appropriate 7.5-minute and 1-degree DEM file(s) can be obtained from the USGS or from commercial sites on the internet. If more than one DEM file is required, then each DEM file specified in the input runstream must have at least one other DEM file adjacent to it otherwise the orphaned DEM file(s) will be flagged. AERMAP prints to the output file an array of DEM files and lets the user know that a DEM file is missing from the array by stating “No Map Present” in place of a DEM map name. This makes it easier for the user to troubleshoot for misspelled DEM map names, errant or missing DEM files.

Keep in mind that a 1-degree DEM file can be as large as 10 MB. AERMAP creates an additional temporary binary file corresponding to each DEM file which can also be as much as 6 Mb each in size, depending on the size of the domain. A 7.5-minute DEM file can be as large as 1.2 M but only covers 1/64th of the same area as a 1-degree DEM file.

While the 7.5-minute DEM data files can be purchased from USGS or other third-party sources, the 1-degree DEM files are available through the Internet via anonymous ftp from the USGS Internet site at [edcftp.cr.usgs.gov](ftp://edcftp.cr.usgs.gov). The USGS is also offering 7.5-minute DEM file in their new SDTS format through “partnerships” with commercial Internet as free downloads. The Internet sites may have some download related restrictions with respect to the SDTS data. However, many offer additional software and features on their sites that users may find helpful. Users should check the USGS website for current availability of data. Most DEM file supplying Internet sites offer similar availability features.

The new Spatial Data Transfer Standard (SDTS) is being promoted by the USGS to eventually replace the old “native” DEM files. The SDTS files are available on the internet can be found zipped up in a “tar” format. Each SDTS file contains over a dozen files that be used to reconstitute the SDTS data back into the old “native” DEM format. The “native” format is the one that is read by AERMAP. To reconstitute a DEM file, a conversion program called SDTS2DEM, is executed in the subdirectory where the unzipped SDTS files are located. A batch file, DEMFILZ.BAT was constructed and is

available on the EPA web site, SCRAM, for reconstituting DEM files. The DEMFILZ is not fully automatic and requires some responses to batch file prompts.

The USGS offered DEM data files are in a UNIX-compressed format and must be uncompressed with a utility that can work with UNIX files. These programs are widely available as shareware and freeware programs. One example is the WINZIP™ program from Nico Mak Computing, Inc. The uncompressed file does not include any record delimiters, and therefore may not be used with AERMAP. The utility program CRLF.EXE, included with AERMAP, adds a carriage return and line feed to the end of each record in the uncompressed DEM data file to create a DOS-compatible file. To use this utility, simply type CRLF followed by the input file name and output file name (without DOS redirection). The output file is now ready to use in AERMAP. This process is for files that are already in the old “native” DEM format.

#### 2.2.4 Horizontal Datums

The Earth is a slightly flattened sphere often referred to as an oblate ellipsoid or spheroid. Methods and measures to define the shape of the earth and points on its surface are constantly being undertaken. The three most prevalent for the United States are the Clarke 1866 spheroid, World Geodetic System (WGS) of 1972, and of 1984. Projections of latitude and longitude have been placed on each one of these systems. The projections are called datums. The North American Datum (NAD) of 1927, for the Clark 1866 spheroid, was ceated using a triangulation method centered on Meades Ranch, Kansas. Beginning with NAD 83 and WGS 72, the projections are Earth-centered. The NAD of 1983 is based on terrestrial and satellite data while WGS 72 and WGS 84 are based on satellite data. NAD 83 and WGS 84 are almost identical with very slight differences. For all practical purposes they are considered the same for AERMAP applications.

Since two or more datums can exist for each of the two DEM types, datum conversion was added to AERMAP. Datum conversion from NAD 27 to NAD 83 is performed using the National Geodetic Survey’s NADCON software version 2.1. The main algorithm has been incorporated into AERMAP. NADCON is designed to convert coordinates in the Continental United States (CONUS),

Old Hawaiian, Puerto Rico (and Virgin Islands), and four Alaskan datums to NAD 83. There are 14 conversion parameter files that need to be loaded along with the AERMAP executable. These files are used to convert from the old datum for the locale mentioned above to NAD 83 and back. NADCON is used only with the 7.5 minute DEM files.

Datum conversion from WGS 72 to 84 is not performed. Differences between the datums of around 7 meters are found in the arctic near Alaska and increase to around 17 meters in the tropics near Puerto Rico. Considering the differences are less than the approximate 93 meters between the 1-degree nodes, the conversion is considered inconsequential.

The difference in 7.5 minute DEM based horizontal datums can have an effect on receptor and source elevation points. The location of a point in one datum will be different than the location of a point under another datum. For 7.5 minute DEM files, the datum shift between points in the CONUS can be close to zero in the Great Lakes region to over 100 meters in the Pacific Northwest and down in Florida. In Hawaii, the datum shift is over 300 meters. Since adjacent 7.5 minute DEM files have their map corners in common with each other, the use of DEM files with different datums can shift a map so that gaps and overlaps occur among the DEM files. Points can fall into these gaps and overlaps. Most of the time, the points will be well inside the coverage of a DEM file. A shift is applied to each point so that the point and the DEM file coordinates are in the same datum. AERMAP determines the single closest DEM elevation value in each quadrant to the northwest, northeast, southeast and southwest point. The elevations are weighted by distance to produce an elevation for the point. This is the elevation that is written to file for inclusion into an AERMOD input file.

### **2.3 AN EXAMPLE AERMAP INPUT FILE**

This section describes the three required pathways that constitute an AERMAP input file -- the control (CO) pathway, the receptor (RE) pathway, and the output (OU) pathway. The optional source (SO) pathway is described in Section 3.3.

### 2.3.1 Selecting Preprocessing Options - CO Pathway

The mandatory keywords for the CO pathway are listed below. These keywords primarily control file types and names and the definition of the modeling domain. A complete discussion of all keywords is in Section 3 and a listing of all keywords is provided in Appendix B.

- STARTING - Indicates the beginning of inputs for the pathway; this keyword is mandatory on each of the pathways.
- TITLEONE - A user-specified title line (up to 68 characters) that will appear on each page of the printed output file (an optional second title line is also available with the keyword TITLETWO).
- DATATYPE - specifies the type of raw terrain data being supplied to the preprocessor.
- DATAFILE - Identifies the raw terrain files being supplied in this run.
- DOMAINXY or - Defines the extent of the domain in UTM or Lat/Long.  
DOMAINLL
- ANCHORXY - Defines the relationship between the user-coordinate system and the UTM coordinate system.
- RUNORNOT - A special keyword that tells the program whether to run the full preprocessor executions or not. If the user selects not to run, then the input runstream file will be processed and any input errors reported, but no calculations will be made.
- FINISHED - Indicates that the user is finished with the inputs for this pathway; this keyword is also mandatory on the other pathways.

The order of the keywords within this pathway is not critical, although the intent of the input runstream file may be easier to decipher if a consistent and logical order is followed. It is suggested that users follow the order in which the keywords are presented in Section 3, unless there is a clear advantage to doing otherwise.

A minimal but complete runstream file for the CO pathway may look something like this:

```
CO STARTING
TITLEONE A Simple Example Problem for the AERMAP Preprocessor
DATATYPE DEM1
DATAFILE CHATT-W.DEM
DOMAINXY 620000.0 3920000.0 16 625000.0 3925000.0 16
ANCHORXY 0.0 0.0 622500 3922500 16 1
RUNORNOT RUN
CO FINISHED
```

The first and last keywords identify the beginning and end of the COntrOl pathway. The TITLEONE keyword provides a means of entering information about the run that will be included as a comment card in the output file. The parameter field for the TITLEONE keyword does not need to be in quotation marks. The preprocessor reads whatever appears in columns 13 - 80 of the TITLEONE record as the title field, without changing the lower case to upper case letters. Leading blanks are therefore significant if the user wishes to center the title within the field. Similar rules apply to the optional TITLETWO keyword.

In the current version, two types of raw terrain DATATYPE are allowed -- the 7.5-minute and 1-degree DEM data. In this example, 1-degree DEM data is being used, which is identified by the parameter DEM1. The extent of the domain can be specified in one of two ways -- DOMAINXY or DOMAINLL -- depending on whether the user specifies the domain extent in UTM coordinates (DOMAINXY) or longitude/latitude coordinates (DOMAINLL). In this example, UTM coordinates are specified, with the southwest corner of the domain at 620000 Easting (E) and 3920000 Northing (N) in zone 16, while the northeast corner of the domain is at 625000 E and 3925000 N in zone 16. NOTE: Since longitude increases from east to west over North America, the domain is defined by the southeast and northwest corners when DOMAINLL is used.

The ANCHORXY keyword specifies the relationship between the coordinate system employed by the user to define source and receptor locations and the UTM coordinate system. The data provided on the ANCHORXY keyword are used to convert the source and receptor locations to UTM coordinates by AERMAP. If the UTM coordinate system is used for receptor locations, then the x- and y-coordinates for the point used to anchor the two systems are the same. In this example, the origin of a user-specified system (0.0, 0.0) is anchored to a point in UTM zone 16 (622500, 3922500). The datum is the NAD 27 (1).

The only remaining mandatory keyword for the CO pathway is RUNORNOT. If the user is unsure about the syntax or operation of keywords or parameters, or is setting up a complex runstream file to run for the first time, it may be useful to set the preprocessor NOT to run. With this parameter set, AERMAP simply reads and analyzes the entire input file and report any errors or warning messages that are generated. All of the inputs are summarized in the output file for the user to review just as if the parameter was set to RUN. Once the input file has been debugged using these descriptive error/warning messages, then the RUNORNOT switch can be set to RUN, as is done in this example.

Since the pathway ID is required to begin in column 1 (see Section 2.4.8 of the AERMOD user's guide for a discussion of this restriction), the preprocessor will assume that the previous pathway is in effect if the pathway field is left blank, as has been done in this example for all runstream images between the STARTING and FINISHED keywords. The preprocessor will do the same for blank keyword fields, which will be illustrated in the next section.

In addition to these mandatory keywords on the CO pathway, the user may select optional keywords to specify whether or not receptor terrain elevations need to be generated or whether they are supplied (the default is to generate terrain elevations) and to allow the use of receptor heights above ground-level for flagpole receptors. These options are described in more detail in Section 3.

### 2.3.2 Specifying a Receptor Network - RE Pathway

In this section, our example will illustrate the use of a single polar receptor network centered on the origin of the user-specified coordinate system, perhaps the stack location. Other options available on the REceptor pathway include specifying a Cartesian grid receptor network, and specifying discrete receptor locations in either a polar or a Cartesian system. These other options are described in more detail in Section 3.

For this example, a polar network with receptors located at five downwind distances for every 10-degree flow vector around a source is specified. The RE pathway for this example is:

```
RE STARTING
GRIDPOLR POL1 STA
          POL1 ORIG 0.0 0.0
          POL1 DIST 100. 200. 300. 500. 1000.
          POL1 GDIR 36 10. 10.
          POL1 END
RE FINISHED
```

The GRIDPOLR keyword can be thought of as a "sub-pathway," in that all of the information for a particular polar network must be in contiguous records. Note, too, that there is a set of secondary keywords, including something that looks like a STArting and ENDing that identify the start and end of the sub-pathway. The order of secondary keywords within the sub-pathway is not critical, similar to the primary pathways. Each image in this sub-pathway must be identified with a network ID (up to eight alphanumeric characters), in this case it is "POL1." Multiple networks may be specified in a single preprocessor run. The preprocessor waits until the END secondary keyword is encountered before processing begins. Other secondary keywords that may be used include terrain heights for receptors on elevated terrain or flagpole receptor heights if those options are being exercised by the user. The use of these optional secondary keywords is described in detail in Section 3.4.

For this example, the ORIG secondary keyword specifies the location of the origin, in (X,Y) coordinates, for the polar network being defined. The ORIG keyword is optional, and the program will default to an origin of (0.0, 0.0) if it is omitted. The DIST keyword identifies the distances in meters

along each direction radial (flow vector) at which the receptors are located. In this example, there are five distances. More receptors could be added by adding values to the input image or by repeating the DIST secondary keyword with the additional distances. The GDIR keyword specifies that the program will Generate DIRection radials for the network. In this example, there are 36 directions, beginning with the 10-degree flow vector (the first parameter) and incrementing every 10 degrees clockwise (the last parameter). As a result, there are 36 directions \* 5 distances, or 180 receptors for this example. Rather than let AERMAP generate the direction radials, the user may elect to define Discrete DIRection radials instead by using the DDIR keyword in place of the GDIR keyword (see Section 3.4.1.2).

### 2.3.3 Specifying the Output File - OU Pathway

The RECEPTOR keyword on the output pathway is used to specify the output filename for the receptor data generated by AERMAP. For this example, the output pathway may look like this:

```
OU STARTING
  RECEPTOR  AERMAP.OUT
OU FINISHED
```

where AERMAP.OUT is the name of the file that will contain the receptor data, including receptor elevations and height scales, generated by AERMAP. The AERMAP.OUT file may then be included in a runstream for the AERMOD model. If the optional source pathway is used to specify source locations and terrain elevations are extracted from the DEM data, then the output filename for the source location data would be specified using the SOURCLOC keyword on the OU pathway (see Section 3.5).

## 2.4 **RUNNING AERMAP**

Now that we have a complete and error-free runstream input file, we are ready to run the preprocessor and review the results. The PC-executable file for AERMAP available on the EPA's

Support Center for Regulatory Air Models (SCRAM) website on the Internet ([www.epa.gov/scram001](http://www.epa.gov/scram001)) opens the runstream input and output message files without the need to "redirect" the I/O on the command line using the DOS redirection symbols '<' and '>'. The command line to run the sample problem might look something like this on the PC:

```
C:\>AERMAP
```

AERMAP opens the hardwired input file, AERMAP.INP, as the runstream input file. AERMAP.OUT is opened as the output message file containing an echo of the input runstream and a listing of any warning or error messages generated by AERMAP. As described in Section 2.3.3, the filename for the data file containing the terrain elevations and height scales for all of the receptors is specified within the input runstream on the output pathway. The DOS prompt is represented by the characters "C:\>", but may appear different on different machines, depending on how the user configures his/her system. The important points are that the AERMAP executable file must be in the directory from which you are attempting to run the program. The input file must be located in the directory from which the program is being executed. The output file is written to the directory from which the program is being executed. Also needed are the 7 \*.LAS and the 7 \*.LOS files that are needed by the NADCON subroutine for converting the 7.5-minute datums to NAD 83. These 14 files need to be in the same subdirectory as the AERMAP input file.

When AERMAP is executed, an update on the status of processing is displayed on the PC monitor. AERMAP first indicates that the setup information in the input runstream file is being processed, followed by initializing the terrain data, and then displays the receptor number currently being processed. If the preprocessor stops after completing the setup processing, then either the RUNORNOT parameter was set to NOT, or a fatal error was encountered during the setup processing. The user should review the message file (AERMAP.OUT in this example) to determine why AERMAP was unsuccessful, correct the input and rerun AERMAP.

Any error message generated by the operating system rather than AERMAP is displayed on the screen and not written to the message file. One such message might be that there is insufficient

memory available to run the program. Handling of DOS error messages may require some knowledge of DOS, unless the meaning of the message is obvious.

The message file specified on the command line will always be generated by the program which will contain any error, warning or diagnostic messages that were generated during the run. By default, the program will echo each line of the input runstream file to the message file to provide a convenient record of the inputs as originally read into the preprocessor. However, for some applications, the length of the input runstream file may be too cumbersome to include the entire set of inputs at the beginning of each output file. This situation may happen, for example, if a large number of discrete receptor locations are used. For this reason, the user is provided with the option to "turn off" the echoing of the input file at any point within the runstream file. This is accomplished by entering the keywords "NO ECHO" in the first two fields anywhere within the runstream file. In other words, place NO in the pathway field, followed by a space and then ECHO. None of the input runstream images after the NO ECHO will be echoed to the output file. Thus, a user may choose to place NO ECHO after the Control pathway in order to keep the control options echoed, but suppress echoing the rest of the input file.

If the original input file is lost or destroyed, and the NO ECHO option was not used, the message file can be copied to another filename and used as an input file to the preprocessor to reproduce a particular application because the input are echoed at the beginning of this file and AERMAP keys on the "RE FINISHED" image to stop processing the runstream file.

The output data file specified on the output pathway of the input runstream contains the receptor pathway as entered by the user in the input file with the addition of the receptor terrain elevations (if requested) and receptor height scales as calculated by AERMAP. This output data file can now be used for the REceptor pathway of an AERMOD input file. Several header records are included in the output data file to identify the version of AERMAP used to generate the file and other information useful for interpreting the results. An example of the AERMAP output file for the sample problem is shown in Figure 2-2.

```

** AERMAP - VERSION 98022
** A Simple Example Problem for the AERMAP Preprocessor
**
** A total of 1 1-degree DEM files were used
** DOMAINXY 620000.0 3920000.0 16 625000.0 3925000.0 16
** ANCHORXY 0.0 0.0 622500 3922500 16 1
** Terrain heights were extracted by default

RE ELEVUNIT METERS
GRIDPOLR POL1 STA
      POL1 ORIG 0.0 0.0
      POL1 DIST 100. 200. 300. 500. 1000.
      POL1 GDIR 36 10. 10.
GRIDPOLR POL1 ELEV 1 465.97 451.61 426.67 416.84 535.88
GRIDPOLR POL1 ELEV 2 462.35 443.92 416.04 403.33 491.90
GRIDPOLR POL1 ELEV 3 458.98 437.87 408.39 392.52 451.40
GRIDPOLR POL1 ELEV 4 456.31 431.12 401.68 377.89 407.62
GRIDPOLR POL1 ELEV 5 453.52 424.67 398.19 360.74 358.05
GRIDPOLR POL1 ELEV 6 450.14 420.11 394.95 345.67 336.48
GRIDPOLR POL1 ELEV 7 447.18 417.53 390.88 341.64 337.38
GRIDPOLR POL1 ELEV 8 444.76 413.26 387.52 341.08 369.71
GRIDPOLR POL1 ELEV 9 442.99 410.57 383.17 340.11 403.53
.
.
.
GRIDPOLR POL1 HILL 1 548.00 547.00 547.00 536.00 539.00
GRIDPOLR POL1 HILL 2 548.00 547.00 547.00 547.00 547.00
GRIDPOLR POL1 HILL 3 548.00 547.00 547.00 547.00 547.00
GRIDPOLR POL1 HILL 4 548.00 547.00 547.00 547.00 547.00
GRIDPOLR POL1 HILL 5 548.00 548.00 547.00 547.00 540.00
GRIDPOLR POL1 HILL 6 548.00 548.00 547.00 547.00 540.00
GRIDPOLR POL1 HILL 7 548.00 548.00 548.00 547.00 548.00
GRIDPOLR POL1 HILL 8 548.00 548.00 548.00 548.00 536.00
GRIDPOLR POL1 HILL 9 548.00 548.00 548.00 548.00 536.00
.
.
.
GRIDPOLR POL1 END

```

Figure 2-2. Example AERMAP Output File for the Sample Problem

## 2.5 SIZE LIMITATIONS AND CREATING A NEW EXECUTABLE

The version of AERMAP that is on the EPA's SCRAM website has the following size limitations for data storage, which can be found in a PARAMETER statement in the file AERMAP.INC:

Variable Name	Description	Limit
NREC	Maximum number of receptors	2500
IXM	Maximum number of x-coordinate (or distance) values per receptor network	100
IYM	Maximum number of y-coordinate (or direction) per receptor network	100
NNET	Maximum number of cartesian and/or polar receptor networks	10
NDEM	Maximum number of DEM terrain data files	100
MAXNOD	Maximum number of nodes per profile in a DEM file	1220
MAXPRF	Maximum number of profiles per DEM file	1220
NARC	Maximum number of receptor arcs for EVALCART receptors	50
NSRC	Maximum number of source locations	500

If the user adjusts these limits, then AERMAP should be recompiled and a new executable program created.

### **3.0 DETAILED KEYWORD REFERENCE**

This section of the AERMAP User's Guide provides a detailed reference for all of the input keyword options for the AERMAP preprocessor. The information provided in this section is more complete and detailed than the information provided in Section 2. Since this section is intended to meet the needs of experienced modelers who may need to understand completely how particular options are implemented in the preprocessor, the information for each keyword should stand on its own. This section assumes that the reader has a basic understanding of the keyword/parameter approach used by the AERMOD model and the AERMAP preprocessor for specification of input options and data. Novice users should first review the contents of Section 2 or the AERMOD User's Guide in order to obtain that understanding.

#### **3.1 OVERVIEW**

The information in this section is organized by function, i.e., the keywords are grouped by pathway, and are in a logical order based on their function within the preprocessor. The order of keywords presented here is the same as the order used in the functional keyword reference in Appendix B, and the Quick Reference section at the end of the volume. The syntax for each keyword is provided, and the keyword type is specified - either mandatory or optional and either repeatable or non-repeatable. Unless noted otherwise, there are no special requirements for the order of keywords within each pathway, although the order in which the keywords are presented here and in Appendix B is recommended. Any keyword which has special requirements for its order within the pathway is so noted following the syntax and type description.

The syntax descriptions in the following sections use certain conventions. Parameters that are in all capital letters and underlined in the syntax description are secondary keywords that are to be entered as indicated for that keyword. Other parameters are given descriptive names to convey the meaning of the parameter, and are listed with an initial capital letter. Many of the parameter names used correspond to variable names used in the computer code of the preprocessor. Parentheses

around a parameter indicate that the parameter is optional for that keyword. The default that is taken when an optional parameter is left blank is explained in the discussion for that keyword.

### 3.2 CONTROL PATHWAY INPUTS AND OPTIONS

The COntrol pathway contains the keywords that provide the overall control of the preprocessor run. These include the specification of the terrain data, the geographic extent of the scenario, and others that are described below. The CO pathway must be the first pathway in the runstream input file.

#### 3.2.1 Title Information

There are two keywords that allow the user to specify up to two lines of title information. The title is included as comment cards in the output data file. The first keyword, TITLEONE, is mandatory, while the second keyword, TITLETWO, is optional. The syntax and type for the keywords are summarized below:

<b>Syntax:</b>	CO TITLEONE Title1 CO TITLETWO Title2
<b>Type:</b>	TITLEONE - Mandatory, Non-repeatable TITLETWO - Optional, Non-repeatable

The parameters Title1 and Title2 are character parameters of length 68, which are read as a single field from columns 13 to 80 of the input record. The title information is taken as it appears in the runstream file without any conversion of lower case to upper case letters. If the TITLETWO keyword is not included in the runstream file, then the second line of the title in the output data file will appear blank.

### 3.2.2 Options for Elevated Terrain

The optional TERRHGTS keyword controls whether the receptor elevations and optional source elevations should be extracted from the DEM data files or that the user-provided receptor terrain elevations should be used. The syntax and type of the TERRHGTS keyword are summarized below:

<b>Syntax:</b>	CO TERRHGTS <u>EXTRACT</u> or <u>PROVIDED</u>
<b>Type:</b>	Optional, Non-repeatable

where the EXTRACT secondary keyword instructs the preprocessor to determine the terrain heights from the DEM data files provided by the user. The PROVIDED secondary keyword forces the preprocessor to use the user-specified elevations that are entered on the receptor pathway and optional source pathway. Any terrain heights that are entered on the receptor pathway are ignored if EXTRACT terrain option is specified, and a non-fatal warning message is generated. The default option is to EXTRACT receptor elevations if no TERRHGTS keyword is present in the input runstream.

### 3.2.3 Flagpole Receptor Height Option

The FLAGPOLE keyword specifies that receptor heights above local ground level (i.e. flagpole receptors) are allowed on the REceptor pathway. The FLAGPOLE keyword may also be used to specify a default flagpole receptor height other than 0.0 meters. The syntax and type of the FLAGPOLE keyword are summarized below:

<b>Syntax:</b>	CO FLAGPOLE (Flagdf)
<b>Type:</b>	Optional, Non-repeatable

where Flagdf is an optional parameter to specify a default flagpole receptor height. If no parameter is provided, then a default flagpole receptor height of 0.0 meters is used. Any flagpole receptor heights

that are entered on the Receptor pathway are ignored if the FLAGPOLE keyword is not present on the Control pathway, and a non-fatal warning message is generated. In this case, the flagpole receptor heights are not included in the output file from AERMAP.

### 3.2.4 Terrain Data Type Specifications

The DATATYPE keyword is needed to specify the type of the raw terrain data being provided to the preprocessor. The current version of AERMAP accepts either the 1-degree DEM data or the 7.5-minute DEM data. The syntax and type of the keyword are summarized below:

<b>Syntax:</b>	CO DATATYPE <u>DEM1</u> or <u>DEM7</u>
<b>Type:</b>	Mandatory, Non-repeatable

where the secondary keyword DEM1 specifies that 1-degree DEM data will be used, and DEM7 specifies that 7.5-minute DEM data will be used. Only one type of DEM data may be used in a given AERMAP run.

### 3.2.5 Terrain Data File Names Specifications

The DATAFILE keyword is needed to specify the names of the raw terrain data being provided to the preprocessor. The keyword is repeatable so that multiple raw terrain file names can be specified. The maximum allowable number of files is determined by the NDEM parameter in the computer code. The syntax and type of the keyword are summarized below:

<b>Syntax:</b>	CO DATAFILE filename
<b>Type:</b>	Mandatory, Repeatable

If the specified file is not found on the computer, the program will generate a fatal error message.

### 3.2.6 Domain Extent Specifications

The DOMAINXY or the DOMAINLL keyword is used to define the geographic extent of the domain that includes all the receptors and sources specified in this run and within which the raw terrain data points will be included in calculation of the receptor height scales. Either of the two keywords may be used to specify the domain extent. The DOMAINXY keyword allows the user to specify the domain in UTM coordinates while the DOMAINLL keyword allows the user to specify it in the World Geodetic System (latitude / longitude). The syntax and type of the keywords are summarized below:

<b>Syntax:</b>	CO DOMAINXY Xdmin Ydmin Zonmin Xdmax Ydmax Zonmax CO DOMAINLL Lonmin Latmin Lonmax Latmax
<b>Type:</b>	Mandatory, Non-repeatable

For the DOMAINXY keyword, Xdmin, Ydmin and Zonmin are the UTM Easting coordinate, UTM Northing coordinate and the UTM zone for the lower left (southwest) corner of the domain; Xdmax, Ydmax and Zonmax are the UTM Easting coordinate, UTM Northing coordinate and the UTM zone for the upper right (northeast) corner of the domain. The UTM coordinates are specified in meters. For the DOMAINLL keyword, Lonmin and Latmin are the longitude and latitude in decimal degrees for the lower right (southeast) corner of the domain; Lonmax and Latmax are the longitude and latitude in decimal degrees for the upper left (northwest) corner of the domain. Note that longitude is entered first, followed by latitude. The current version of AERMAP uses a positive value for west longitude.

### 3.2.7 Anchor Location Specifications

The ANCHORXY keyword is used to relate the origin of the user-specified coordinate system in the receptor grid to the UTM coordinate system. The user has the option to specify the receptor locations in either true UTM coordinates or in some arbitrary user-specified coordinate system. For any further processing of the terrain data, the preprocessor needs to determine the location of the receptors in UTM coordinates. This is done with this keyword by specifying the coordinates of any

one geographic location in the two coordinate systems. The syntax and type of the keyword are summarized below:

<b>Syntax:</b>	CO ANCHORXY Xauser Yauser Xautm Yautm Zautm Nada
<b>Type:</b>	Mandatory, Non-repeatable

where Xauser and Yauser are the coordinates of any geographic location, typically the origin (0,0), in the user coordinate system and Xautm, Yautm and Zautm are the UTM coordinates of the same point in UTM Easting, Northing and Zone. If the user specifies the receptor locations in UTM coordinates, the values of Xauser and Xautm will be identical, and so will those of Yauser and Yautm. Nada represent the horizontal datum that was used to establish the anchor point. All receptor and source locations are referenced to this point.

The following is a list of applicable Nada values and the datums Nada references. These values follow the convention used in the USGS Blue Book and the list follows the convention used in the DEM file headers all except for the use of "0" (zero). In Table 4-1, which was extracted from the Blue Book, also lists these codes under Data Element 27. Ellipsoid and spheroid are often used interchangeably in the literature.

- 0 - No conversion between NAD 27 and NAD 83  
    Bypass NADCON for international users (default: NAD83 or WGS8 depending upon DATATYPE)
- 1 - North American Datum of 1927 (based on Clarke 1866 ellipsoid)
- 2 - World Geodetic System of 1972 (based on WGS 72 ellipsoid)
- 3 - World Geodetic System of 1984\* ("identical" to the GRS 80 ellipsoid)
- 4 - North American Datum of 1983\* (based on WGS 80 ellipsoid)
- 5 - Old Hawaii Datum (based on Clarke 1866 ellipsoid but not NAD 27))
- 6 - Puerto Rico/ Virgin Island Datum (based on Clarke 1866 ellipsoid)

\* Note: The GRS80 and WGS84 ellipsoids are considered to be the same. Actually, there is a very small difference in the flattening which results in the semi-minor axis,  $b$ , being different by 0.0001 meters. There is no known application for which this difference is significant. The WGS84 and NAD83 datum are considered the same for all practical purposes.

NADCON is used to convert from NAD 27, Old Hawaiian, or Puerto Rico datums to NAD83 and vice versa. A datum code is read from each DEM header and a variable is automatically set to 1, 4, 5, or 6 for the respective datum conversion to NAD 83. The variable is set to 4 for the reverse conversion direction. NADCON produces the shift values in both meters and degrees, minutes, seconds that are added to the receptor. NADCON is only called for converting 7.5-minute DEM coordinates from one datum to another. Parameter files are included as \*.LAS and \*.LOS files for the CONUS, Hawaii, Puerto Rico/Virgin Islands, Alaska and three Alaskan Island Groups (St. George, St. Paul, and St. Lawrence). These 14 files need to be included in the same subdirectory as the AERMAP input file.

Note: For international users, setting NADA to "0" will bypass NADCON and the need to enter any parameter files.

The two 1-degree datums, WGS 72 and WGS 84, are both Earth-centric datums. The difference in point locations varies with latitude from about 7 meters north of Alaska to about 17 meters near 20 degrees north latitude. An interpolation based on the first corner of the first read 1-degree DEM file is used to calculate the difference used in converting from one datum to the other. The positional error that this represents is about 1 meter every 60 nautical miles.

### 3.2.8 To Run or Not to Run - That is the Question

Because of the error handling and the "defensive programming" that has been employed in the design of the AERMAP model, it is intended that the program will read through all of the inputs in the runstream file regardless of any errors or warnings that may be encountered. If a fatal error occurs in processing of the runstream information, then further program calculations will be aborted. Otherwise, the program will attempt to run. Because of the great many options available in the AERMAP preprocessor, and the potential for wasted resources if a large run is performed with some incorrect input data, the RUNORNOT keyword has been included on the Control pathway to allow the user to specify whether to RUN the preprocessor and perform all of the calculations, or NOT to run and only process the input runstream data and summarize the setup information. The syntax and type of the RUNORNOT keyword are summarized below:

<b>Syntax:</b>	CO RUNORNOT <u>RUN</u> or <u>NOT</u>
<b>Type:</b>	Mandatory, Non-repeatable

### 3.3 SOURCE PATHWAY INPUTS AND OPTIONS (OPTIONAL)

The optional **SO**urce pathway is used to define source locations for the purpose of generating source elevations from the DEM data and/or for identifying the origins of discrete polar receptors. There is only one keyword available on the source pathway, besides STARTING and FINISHED. The syntax and type of the LOCATION keyword are summarized below:

<b>Syntax:</b>	SO LOCATION Srcid Srctyp Xs Ys (Zs)
<b>Type:</b>	Mandatory if using Discrete Polar Receptors, Mandatory if using source ID for origin of polar grid, Repeatable

where Srcid is an alphanumeric source ID of up to eight characters, Srctyp is the source type, which is identified by one of the secondary keywords - POINT, VOLUME, AREA, AREAPOLY, or AREACIRC, Xs and Ys are the x-coordinate (East) and y-coordinate (North) of the source location in meters, and Zs is the optional source elevation in meters above mean sea level. This keyword is mandatory if any discrete polar receptors are being used or if a source ID is used to specify the origin for a polar grid. The keyword can be repeated up to a maximum number of sources whose value is determined by the NSRC parameter in the computer code.

### **3.4 RECEPTOR PATHWAY INPUTS AND OPTIONS**

The **RE**ceptor pathway contains keywords that define the receptor information for a particular run. The RE pathway contains keywords that allow the user to define Cartesian grid receptor networks and/or polar grid receptor networks, with either uniform or non-uniform grid spacing, as well as discrete receptor locations referenced to a Cartesian or a polar system. The program is initially setup to allow ten (10) gridded receptor networks of either (or both) types in a single run, plus discrete receptors of either type, up to a maximum limit on the total number of receptors. The limit on the total number of receptors in a given run is controlled by a Fortran PARAMETER in the computer code (AERMAP.INC). The number of receptor networks allowed is also controlled by a PARAMETER statement in AERMAP.INC, and may be easily changed by the user and the program recompiled.

The default units for receptor elevations input to the AERMAP preprocessor are in meters, however, the user may specify receptor elevations to be input in units of feet by adding the optional RE ELEVUNIT FEET card immediately after the RE STARTING card. Regardless of the input elevation units, AERMAP outputs all elevations in meters, and the RE ELEVUNIT METERS card is added to the output file following the RE STARTING card.

### 3.4.1 Defining Networks of Gridded Receptors

Two types of receptor networks are allowed by the AERMAP preprocessor. A Cartesian grid network, defined through the GRIDCART keyword, includes an array of points identified by their x (east-west) and y (north-south) coordinates. A polar network, defined by the GRIDPOLR keyword, is an array of points identified by direction and distance from a user-defined origin. Each of these keywords has a series of secondary keywords associated with it that are used to define the network, including any receptor elevations for elevated terrain and flagpole receptor heights. The GRIDCART and GRIDPOLR keywords can be thought of as "sub-pathways," since their secondary keywords include a STArt and an ENd card to define the start and end of inputs for a particular network.

#### 3.4.1.1 Cartesian Grid Receptor Networks.

Cartesian grid receptor networks are defined by use of the GRIDCART keyword. The GRIDCART keyword may be thought of as a "sub-pathway," in that there are a series of secondary keywords that are used to define the start and the end of the inputs for a particular network, and to select the options for defining the receptor locations that make up the network. The syntax and type of the GRIDCART keyword are summarized below:

<b>Syntax:</b>	RE GRIDCART Netid <u>STAr</u>
	<u>XYINC</u> Xinit Xnum Xdelta Yinit Ynum Ydelta
	or <u>XPNTS</u> Gridx1 Gridx2 Gridx3 .... Gridxn, and
	<u>YPNTS</u> Gridy1 Gridy2 Gridy3 .... Gridyn
	<u>ELEV</u> Row Zelev1 Zelev2 Zelev3 ... Zelevn
	<u>FLAG</u> Row Zflag1 Zflag2 Zflag3 ... Zflagn
	<u>ENd</u>
<b>Type:</b>	Optional, Repeatable

where the parameters are defined as follows:

Netid	Receptor network identification code (up to eight alphanumeric characters)
<u>STA</u>	Indicates the <u>ST</u> art of GRIDCART inputs for a particular network, repeated for each new Netid
<u>XYINC</u>	Keyword identifying uniform grid network generated from x and y increments
Xinit	Starting x-axis grid location in meters
Xnum	Number of x-axis receptors
Xdelta	Spacing in meters between x-axis receptors
Yinit	Starting y-axis grid location in meters
Ynum	Number of y-axis receptors
Ydelta	Spacing in meters between y-axis receptors
<u>XPNTS</u>	Keyword identifying grid network defined by a series of discrete x and y coordinates (used with <u>YPNTS</u> )
Gridx1	Value of first x-coordinate for Cartesian grid (m)
Gridxn	Value of 'nth' x-coordinate for Cartesian grid (m)
<u>YPNTS</u>	Keyword identifying grid network defined by a series of discrete x and y coordinates (used with <u>XPNTS</u> )
Gridy1	Value of first y-coordinate for Cartesian grid (m)
Gridyn	Value of 'nth' y-coordinate for Cartesian grid (m)
<u>ELEV</u>	Keyword to specify that receptor elevations follow (optional)
Row	Indicates which row (y-coordinate fixed) is being input (Row=1 means first, i.e., southmost row)
Zelev	An array of receptor terrain elevations (m) for a particular Row (default units of meters may be changed to feet by use of RE ELEVUNIT keyword), number of entries per row equals the number of x-coordinates for that network
<u>FLAG</u>	Keyword to specify that flagpole receptor heights follow (optional)
Row	Indicates which row (y-coordinate fixed) is being input (Row=1 means first, i.e., southmost row)
Zflag	An array of receptor heights (m) above local terrain elevation for a particular Row (flagpole receptors), number of entries per row equals the number of x-coordinates for that network
<u>END</u>	Indicates the <u>EN</u> D of GRIDCART inputs for a particular network, repeated for each new Netid

The ELEV and FLAG keywords are optional inputs, and are only needed if elevated terrain or flagpole receptor heights are to be provided. If the ELEV keyword is used and the preprocessor is being run with the TERRHGTS option set to EXTRACT (see Section 3.2.2), then the elevated terrain

height inputs will be ignored by the preprocessor, and a non-fatal warning message will be generated. If the TERRHGTS option is set to PROVIDED, and no elevated terrain heights are entered, the elevations will default to 0.0 meters, and warning messages will also be generated. If the FLAG keyword is used and the FLAGPOLE option has not been specified on the CO pathway (see Section 3.2.3), then the flagpole data will be ignored when the output receptor data are generated. If the FLAGPOLE option is selected, and the FLAG keyword is not used, then the default flagpole height will be output with the receptor data.

The order of cards within the GRIDCART subpathway is not important, as long as all inputs for a particular network are contiguous and start with the STA secondary keyword and end with the END secondary keyword. It is not even required that all ELEV cards be contiguous, although the input file will be more readable if a logical order is followed. The network ID is also not required to appear on each runstream image (except for the STA card). The program will assume the previous ID if none is entered, similar to the use of continuation cards for pathway and keywords. Thus, the following two examples produce the same 8 X 4 Cartesian grid network:

```

RE GRIDCART CAR1 STA
RE GRIDCART CAR1 XPNTS -500. -400. -200. -100. 100. 200. 400. 500.
RE GRIDCART CAR1 YPNTS -500. -250. 250. 500.
RE GRIDCART CAR1 ELEV 1 10. 10. 10. 10. 10. 10. 10. 10.
RE GRIDCART CAR1 ELEV 2 20. 20. 20. 20. 20. 20. 20. 20.
RE GRIDCART CAR1 ELEV 3 30. 30. 30. 30. 30. 30. 30. 30.
RE GRIDCART CAR1 ELEV 4 40. 40. 40. 40. 40. 40. 40. 40.
RE GRIDCART CAR1 FLAG 1 10. 10. 10. 10. 10. 10. 10. 10.
RE GRIDCART CAR1 FLAG 2 20. 20. 20. 20. 20. 20. 20. 20.
RE GRIDCART CAR1 FLAG 3 30. 30. 30. 30. 30. 30. 30. 30.
RE GRIDCART CAR1 FLAG 4 40. 40. 40. 40. 40. 40. 40. 40.
RE GRIDCART CAR1 END

```

```

RE GRIDCART CAR1 STA
                XPNTS -500. -400. -200. -100. 100. 200. 400. 500.
                YPNTS -500. -250. 250. 500.
                ELEV 1 8*10.
                FLAG 1 8*10.
                ELEV 2 8*20.
                FLAG 2 8*20.
                ELEV 3 8*30.
                FLAG 3 8*30.
                ELEV 4 8*40.
                FLAG 4 8*40.
RE GRIDCART CAR1 END

```

The Row parameter on the ELEV and FLAG inputs may be entered as either the row number, i.e., 1, 2, etc., or as the actual y-coordinate value, e.g., -500., -250., etc. in the example above. The program sorts the inputs using Row as the index, so the result is the same. The above example could therefore be entered as follows, with the same result:

```

RE GRIDCART CAR1 STA
                XPNTS -500. -400. -200. -100. 100. 200. 400. 500.
                YPNTS -500. -250. 250. 500.
                ELEV -500. 8*10.
                FLAG -500. 8*10.
                ELEV -250. 8*20.
                FLAG -250. 8*20.
                ELEV 250. 8*30.
                FLAG 250. 8*30.
                ELEV 500. 8*40.
                FLAG 500. 8*40.
RE GRIDCART CAR1 END

```

Of course, one must use either the row number or y-coordinate value consistently within each network to have the desired result.

The following simple example illustrates the use of the XYINC secondary keyword to generate a uniformly spaced Cartesian grid network. The resulting grid is 11 x 11, with a uniform spacing of 1 kilometer (1000. meters), and is centered on the origin (0., 0.). No elevated terrain heights or flagpole receptor heights are included in this example.

```
RE GRIDCART CG1 STA
  XYINC -5000. 11 1000. -5000. 11 1000.
RE GRIDCART CG1 END
```

### 3.4.1.2 Polar Grid Receptor Networks.

Polar receptor networks are defined by use of the GRIDPOLR keyword. The GRIDPOLR keyword may also be thought of as a "subpathway," in that there are a series of secondary keywords that are used to define the start and the end of the inputs for a particular network, and to select the options for defining the receptor locations that make up the network. The syntax and type of the GRIDPOLR keyword are summarized below:

```
Syntax: RE GRIDPOLR Netid STA
           ORIG Xinit Yinit,
           or ORIG Srcid
           DIST Ring1 Ring2 Ring3 ... Ringn
           DDIR Dir1 Dir2 Dir3 ... Dirn,
           or GDIR Dirnum Dirini Dirinc
           ELEV Dir Zelev1 Zelev2 Zelev3 ... Zelevn
           FLAG Dir Zflag1 Zflag2 Zflag3 ... Zflagn
           END
```

```
Type: Optional, Repeatable
```

where the parameters are defined as follows:

Netid	Receptor network identification code (up to eight alphanumeric characters)
<u>STA</u>	Indicates <u>STA</u> rt of GRIDPOLR inputs for a particular network, repeat for each new Netid
<u>ORIG</u> Xinit Yinit Srcid	Keyword to specify the origin of the polar network (optional) x-coordinate for origin of polar network y-coordinate for origin of polar network Source ID of source used as origin of polar network
<u>DIST</u> Ring1 Ringn	Keyword to specify distances for the polar network Distance to the first ring of polar coordinates Distance to the 'nth' ring of polar coordinates
<u>DDIR</u> Dir1 Dirn	Keyword to specify discrete direction radials for the polar network First direction radial in degrees (1 to 360) The 'nth' direction radial in degrees (1 to 360)
<u>GDIR</u> Dirnum Dirini Dirinc	Keyword to specify generated direction radials for the polar network Number of directions used to define the polar system Starting direction of the polar system Increment (in degrees) for defining directions
<u>ELEV</u> Dir Zelev	Keyword to specify that receptor elevations follow (optional) Indicates which direction is being input An array of receptor terrain elevations for a particular direction radial (default units of meters may be changed to feet by use of RE ELEVUNIT keyword), number of entries per radial equals the number of distances for that network
<u>FLAG</u> Dir Zflag	Keyword to specify that flagpole receptor heights follow (optional) Indicates which direction is being input An array of receptor heights above local terrain elevation for a particular direction (flagpole receptors)
<u>END</u>	Indicates <u>END</u> of GRIDPOLR subpathway, repeat for each new Netid

The ORIG secondary keyword is optional for the GRIDPOLR inputs. If omitted, the program assumes a default origin of (0,0,.) in x,y coordinates. The ELEV and FLAG keywords are also optional inputs, and are only needed if elevated terrain or flagpole receptor heights are to be provided. If elevated terrain is being provided, then the ELEV inputs are needed for each receptor. If the ELEV keyword are used and the program is being run with the TERRHGTS option set to EXTRACT (see

Section 3.2.2), then the elevated terrain height inputs will be ignored by the preprocessor, and a non-fatal warning message will be generated. If the TERRHGTS option is set to PROVIDED and no elevated terrain heights are entered, the elevations will default to 0.0 meters, and warning messages will also be generated. If the FLAG keyword is used and the FLAGPOLE option has not been specified on the CO pathway (see Section 3.2.3), then the flagpole data will be ignored when the output receptor data are generated. If the FLAGPOLE option is selected, and the FLAG keyword is not used, then the default flagpole height will be output with the receptor data.

As with the GRIDCART keyword described above, the order of cards within the GRIDPOLR subpathway is not important, as long as all inputs for a particular network are contiguous and start with the STA secondary keyword and end with the END secondary keyword. It is not even required that all ELEV cards be contiguous, although the input file will be more readable if a logical order is followed. The network ID is also not required to appear on each runstream image (except for the STA card). The program will assume the previous ID if none is entered, similar to the use of continuation cards for pathway and keywords.

The following example of the GRIDPOLR keyword generates a receptor network consisting of 180 receptor points on five concentric distance rings centered on an assumed default origin of (0.,0.). The receptor locations are placed along 36 direction radials, beginning with 10. degrees and incrementing by 10. degrees in a clockwise fashion.

```

RE GRIDPOLR POL1 STA
                DIST 100. 300. 500. 1000. 2000.
                GDIR 36 10. 10.
RE GRIDPOLR POL1 END

```

Another example is provided illustrating the use of a non-zero origin, discrete direction radials and the specification of elevated terrain and flagpole receptor heights:

```

RE GRIDPOLR POL1 STA
      ORIG  500.  500.
      DIST  100.  300.  500.  1000.  2000.
      DDIR  90.  180.  270.  360.
      ELEV  90.  5.  10.  15.  20.  25.
      ELEV  180.  5.  10.  15.  20.  25.
      ELEV  270.  5.  10.  15.  20.  25.
      ELEV  360.  5.  10.  15.  20.  25.
      FLAG  90.  5.  10.  15.  20.  25.
      FLAG  180.  5.  10.  15.  20.  25.
      FLAG  270.  5.  10.  15.  20.  25.
      FLAG  360.  5.  10.  15.  20.  25.
RE GRIDPOLR POL1 END

```

As with the GRIDCART keyword described above, the user has the option of specifying the radial number (e.g. 1, 2, 3, etc.) on the ELEV and FLAG inputs, or the actual direction associated with each radial.

### 3.4.2 Using Multiple Receptor Networks

For some modeling applications, the user may need a fairly coarsely spaced network covering a large area to identify the area of significant impacts for a plant, and a denser network covering a smaller area to identify the maximum impacts. To accommodate this modeling need, the AERMAP preprocessor allows the user to specify multiple receptor networks in a single run. The user can define either Cartesian grid networks or polar networks, or both. With the use of the ORIG option in the GRIDPOLR keyword, the user can easily place a receptor network centered on the facility being permitted, and also place a network centered on another background source known to be a significant contributor to high concentrations. Alternatively, the polar network may be centered on a receptor location of special concern, such as a nearby Class I area.

As noted in the introduction to this section, the program initially allows up to 10 receptor networks in a single run. This limit can be changed by modifying the Fortran PARAMETER statement in the AERMAP.INC file and recompiling the program. There are also limits on the number of distances or directions (or the number of x-points and the number of y-points for Cartesian grids) that can be specified for each network. These are initially set to 100 distances or x-points and 100

directions or y-points. These limits are also controlled by Fortran PARAMETER statements in AERMAP.INC, and may be modified.

### 3.4.3 Specifying Discrete Receptor Locations

In addition to the receptor networks defined by the GRIDCART and GRIDPOLR keywords described above, the user may also specify discrete receptor points for modeling impacts at specific locations of interest. This may be used to model critical receptors, such as the locations of schools or houses, nearby Class I areas, or locations identified as having high concentrations by previous modeling analyses. The discrete receptors may be input as either Cartesian x,y points (DISCCART keyword) or as polar distance and direction coordinates (DISCPOLR keyword). Both types of receptors may be identified in a single run. In addition, for discrete polar receptor points the user specifies the source location used as the origin for the receptor on the SO LOCATION card (see Section 3.3).

#### 3.4.3.1 Discrete Cartesian Receptors.

Discrete Cartesian receptors are defined by use of the DISCCART keyword. The syntax and type of this keyword are summarized below:

<b>Syntax:</b>	RE DISCCART Xcoord Ycoord (Zelev) (Zflag)
<b>Type:</b>	Optional, Repeatable

where the Xcoord and Ycoord parameters are the x-coordinate and y-coordinate (m), respectively, for the receptor location. The Zelev parameter is an optional terrain elevation (m). The Zflag parameter is the optional receptor height above ground (m) for modeling flagpole receptors. All of the parameters are in units of meters, except for Zelev, which defaults to meters but may be specified in feet by use of the RE ELEVUNIT keyword.

Note that the output elevations will always be in meters, regardless of input units.

If neither the elevated terrain option (Section 3.2.7) nor the flagpole receptor height option (Section 3.2.8) are used, then the optional parameters are ignored if present. If only the elevated terrain height option is used (no flagpoles), then the third parameter (the field after the Ycoord) is read as the Zelev parameter. If only the flagpole receptor height option is used (no elevated terrain), then the third parameter is read as the Zflag parameter. If both options are used, then the parameters are read in the order indicated for the syntax above. If the optional parameters are left blank, then default values will be used. The default value for Zelev is 0.0, and the default value for Zflag is defined by the CO FLAGPOLE card (see Section 3.2.8). Note: If both the elevated terrain and flagpole receptor height options are used, then the third parameter will always be used as Zelev, and it is not possible to use a default value for Zelev while entering a specific value for the Zflag parameter.

#### 3.4.3.2 Discrete Polar Receptors.

Discrete polar receptors are defined by use of the DISCPOLR keyword. The syntax and type of this keyword are summarized below:

<b>Syntax:</b>	RE DISCPOLR Srcid Dist Direct (Zelev) (Zflag)
<b>Type:</b>	Optional, Repeatable

where the Srcid is the alphanumeric source identification for one of the sources defined on the SO pathway which will be used to define the origin for the polar receptor location. The Dist and Direct parameters are the distance in meters and direction in degrees for the discrete receptor location. Degrees are measured clockwise from north. The Zelev parameter is an optional terrain elevation for the receptor. The unit of Zelev is in meters, unless specified as feet by the RE ELEVUNIT keyword. The Zflag parameter is the optional receptor height above ground (meters) for modeling flagpole receptors.

If neither the elevated terrain option (Section 3.2.7) nor the flagpole receptor height option (Section 3.2.8) are used, then the optional parameters are ignored if present. If only the elevated terrain height option is used (no flagpoles), then the third parameter (the field after the Ycoord) is read as the Zelev parameter. If only the flagpole receptor height option is used (no elevated terrain), then the third parameter is read as the Zflag parameter. If both options are used, then the parameters are read in the order indicated for the syntax above. If the optional parameters are left blank, then default values will be used. The default value for Zelev is 0.0, and the default value for Zflag is defined by the CO FLAGPOLE card (see Section 3.2.8). Note: If both the elevated terrain and flagpole receptor height options are used, then the fourth parameter will always be used as Zelev, and it is not possible to use a default value for Zelev while entering a specific value for the Zflag parameter.

#### 3.4.3.3 Discrete Cartesian Receptors for EVALFILE Output.

The EVALCART keyword is used to define discrete Cartesian receptor locations, similar to the DISCCART keyword, but it also allows for grouping of receptors, e.g., along arcs. It is designed to be used with the EVALFILE option of AERMOD. The syntax and type for the EVALCART keyword are summarized below:

<b>Syntax:</b>	RE EVALCART Xcoord Ycoord Zelev Zflag Arcid (Name)
<b>Type:</b>	Optional, Repeatable

where the Xcoord and Ycoord parameters are the x-coordinate and y-coordinate (m), respectively, for the receptor location. The Zelev parameter is the terrain elevation (m) for the receptor. The Zflag parameter is the receptor height above ground (m) for modeling flagpole receptors. All of the parameters are in units of meters, except for Zelev, which default to meters but may be specified in feet by use of the RE ELEVUNIT keyword. Note that the output elevations will always be in meters, regardless of the input units. The Arcid parameter is the receptor grouping identification, which may be up to eight characters long, and may be used to group receptors by arc. The Name parameter is an optional name field that may be included to further identify a particular receptor location. The Name parameter is ignored by the preprocessor program and the AERMOD model.

### 3.5 OUTPUT PATHWAY INPUTS AND OPTIONS

The **OU**put pathway is used to define filenames for the receptor and optional source location output data. There are only two keywords available on the output pathway, besides STARTING and FINISHED, one for receptor output data and the other for source location output data. The syntax and type of the RECEPTOR keyword are summarized below:

<b>Syntax:</b>	OU RECEPTOR Recfil
<b>Type:</b>	Mandatory, Non-repeatable

where Recfil specifies the filename (up to 60 characters) for the receptor output data.

The syntax and type of the SOURCLOC keyword are summarized below:

<b>Syntax:</b>	OU SOURCLOC Srcfile
<b>Type:</b>	Optional, Non-repeatable

where Srcfile specifies the filename (up to 60 characters) for the source location output data. The SOURCLOC keyword must be specified if the runstream contains a source pathway and the user specifies that terrain heights are to be extracted from the DEM data.



## 4.0 TECHNICAL DESCRIPTION

This section describes the technical details of the AERMAP preprocessor. This is meant to give the user a better understanding of the working of the preprocessor.

### 4.1 DETERMINING RECEPTOR HEIGHT SCALES

For applications involving elevated terrain, the AERMOD model requires a height scale which is used to calculate the critical dividing streamline height,  $H_{crit}$ , for each receptor. The primary purpose of the AERMAP terrain preprocessor is to determine the height scale ( $h_c$ ) for each receptor, based on the following procedure:

1. At this point, AERMAP has already determined the highest terrain elevations in each of the entered DEM files.
2. Initialize the controlling hill as the receptor height and begin with the DEM file in which the receptor is located.
3. Read each of the elevation values in the DEM file and a) compute the distance to the DEM point from the receptor, b) compute the relief height of the DEM point with respect to the height of the receptor ( $h_t - h_r$ ), and determine the slope. If the slope is less than 10%, go on to the next DEM point. If the slope is 10% or greater, compare the DEM elevation to the stored controlling hill height for the receptor. If higher, update the controlling hill height.
4. Determine the distance from the receptor to the nearest point of the next DEM file and determine the slope as in Step 3. If the slope is 10% or greater, go to Step 3. Else repeat Step 4 for the next DEM file.

## 4.2 DIGITAL ELEVATION MODEL (DEM) DATA

The DEM data are distributed by the USGS in two different scales -- the 7.5-minute DEM and the 1-degree DEM. The 7.5-minute DEM provides coverage in 7.5 X 7.5-minute blocks; each file provides the same coverage as a standard 1:24,000-scale map series quadrangle. The 1-degree DEM provides coverage in 1 X 1-degree blocks; two such files provide the same coverage as a standard 1:250,000-scale map series quadrangle.

The current version of the AERMAP preprocessor can process either the 7.5-minute DEM data or the 1-degree DEM data. A 7.5-minute DEM has the following characteristics:

- The data consist of a regular array of elevations referenced horizontally in the UTM coordinate system.
- The unit of coverage is a 7.5-minute quadrangle.
- The data are ordered from south to north in profiles that are ordered from west to east.
- The data are stored as profiles in which the horizontal spacing of the elevations along and between each profile is 30 m.
- The profiles do not always have the same number of elevations (nodes) because of the variable angle between the quadrangle's true north and the grid north of the UTM coordinate system.
- Elevations for the continental U.S. are either meters, feet, decimeters, or decifeet referenced to mean sea level. DEM's of low-relief terrain or generated from contour maps with intervals of 10 ft (3 m) or less are generally recorded in feet. DEM's of moderate to high-relief terrain or generated from maps with terrain contour intervals

greater than 10 ft are generally recorded in meters. A rare few are in decifeet or decimeters.

Profiles for 7.5-minute DEM's are generated by using a UTM cartesian coordinate system as a base. The profiles are clipped to the straight-line intercept between the four geographic corners of the quadrangle -- an approximation of the geographic map boundary as shown in Figure 4-1.

The UTM coordinates of the four corners (i.e., Pt 1, Pt 2, Pt 3 and Pt 4 in Figure 4-1) of the 7.5-minute DEM's are listed in the type A (header) record, data element 11. The UTM coordinates of the starting points of each profile are listed in the type B record (profiles), shown in Table 4-2, data element 3. Because of the variable orientation of the quadrilateral in relation to the UTM coordinate system, profiles intersect the east and west boundaries of the quadrangle, as well as the north and south boundaries, as shown in Figure 4-1. In addition, 7.5-minute DEM's have profile easting values that are continuous from one DEM to the adjoining DEM only if the adjoining DEM is contained within the same UTM zone.



- Elevations are in meters relative to mean sea level.
- The data are ordered from south to north in profiles that are ordered from west to east.
- Spacing of the elevations along each profile is 3 arc-seconds. The first and the last data points are the integer degrees of latitude. A profile, therefore, contains 1201 elevations.
- Spacing between profiles varies by latitude; however, the first and last data points are at the integer degrees of longitude. For the contiguous United States, the spacing is 3 arc-seconds. Between 50 degrees N and 70 degrees N, the spacing is 6 arc-seconds. For the remainder of Alaska, north of 70 degrees N the spacing is 9 arc-seconds.

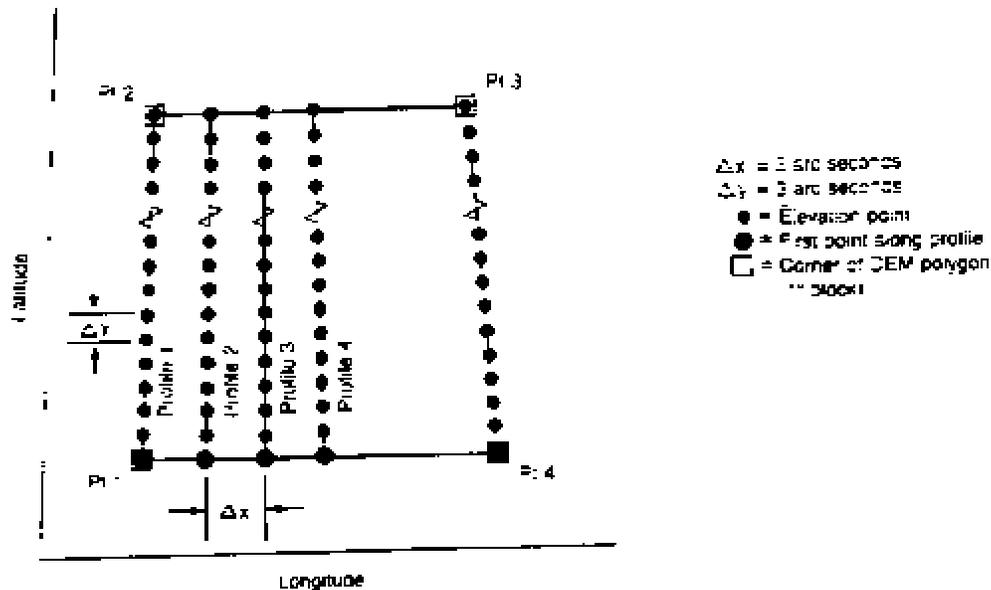


Figure 4-2. Structure of a 1-degree DEM Data File

There are two types of records in the DEM files. The first is a header record consisting of general information about the DEM data file. This record appears only once in the file and is always the first record. The second record type contains the elevation data along each profile. The structure of these two record types are described in Tables 4-1 and 4-2, respectively. A complete description of the record structure is in a publication by the USGS (U.S. Dept. of Interior, 1993).

Table 4-1. DEM Data Elements - Logical Record Type A

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format		Comment	
			Starting byte	Ending byte		
1	File name	ALPHA	A40	1	40	DEM quadrangle name.
	Free Format Text	ALPHA	A40	41	80	Free format descriptor field, contains useful information related to digital process such as digitizing instrument, photo codes, slot widths, etc.
	Filler	---	---	81	135	
	Process Code	ALPHA	A1	136		Code 1=GPM 2=Manual Profile 3=DLG2DEM (includes any DLG type process such as CTOG or LINETRACE) 4=DCASS
2	MC origin code	ALPHA	A4	141	144	Mapping Center origin Code. Valid codes are EMC, WMC, MCMC, RMMC, FS, GPM2.
3	DEM level code	INTEGER*2	I6	145	150	Code 1=DEM-1 2=DEM-2 3=DEM-3
4	Code defining	INTEGER*2	I6	151	156	Code 1=regular

elevation pattern  
(regular or random)

2= random is reserved for  
future use.

Table 4-1. DEM Data Elements - Logical Record Type A (continued)

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format		Comment	
			Starting byte	Ending byte		
5	Code defining ground planimetric reference system	INTEGER*2	16	157	162	Code 0=Geographic 1=UTM 2=State plane  Code 0 represents the geographic (latitude/longitude) system for 1-degree DEM's. Code 1 represents the current use of the UTM coordinate system for 7.5-minute DEM's.
6	Code defining zone in ground planimetric reference system	INTEGER*2	16	163	168	Codes for State plane and UTM coordinate zones for 7.5-minute DEM's. Code  is set to zero for 1-degree DEM's.
7	Map projection parameters	REAL*8	15D24.15	169	528	Definition of parameters for various projections.  All 15 fields of this element are set to zero and should be ignored.
8	Code defining unit of measure for ground planimetric	INTEGER*2	16	529	534	Code 0=radians 1=feet 2=meters

coordinates through-  
out the file

3=arc-seconds

Normally set to code 2 for 7.5-minute DEM's. Always set to  
code 3 for 1-degree DEM's.

Table 4-1. DEM Data Elements - Logical Record Type A (continued)

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format		Comment	
			Starting byte	Ending byte		
9	Code defining unit of measure for elevation coordinates throughout the file	INTEGER*2	16	535	540	Code 1=feet 2=meters Normally code 2, meters, for 7.5-minute and 1-degree DEM's.
10	Number (n) of sides in the polygon which defines the coverage of the DEM file	INTEGER*2	16	541	546	n=4.
11	A 4,2 array containing the ground coordinates of the four corners for the DEM	REAL*8	4(2D24.15)	547	738	The coordinates of the quadrangle corners are ordered in a clockwise direction beginning with the southwest corner, in units specified in data element 8.
12	A two-element array containing minimum and maximum elevations for the DEM	REAL*8	2D24.15	739	786	The values are in the unit of measure given by data element 9 in this record.

13	Counterclockwise angle (in radians) from the primary axis of ground planimetric refer- ence to the pri- mary axis of the DEM local reference system	REAL*8	D24.15	787	810	Set to zero to align with the coordinate system specified in element 5.
----	---	--------	--------	-----	-----	---

Table 4-1. DEM Data Elements - Logical Record Type A (continued)

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format			Comment
			Starting byte	Ending byte		
14	Accuracy code for elevations	INTEGER*2	16	811	816	Code 0=unknown accuracy 1=accuracy information is given in logical record type C (not used).
15	A three-element array These elements are usually set to; 30, 30, 1 for of DEM spatial resolution for x, y, z. Units of measure are consistent with those indicated by data elements 8 and 9 in this record	REAL*4	3E12.6	817	852	7.5-minute DEM's, and 3, 3, 1 for 1-degree DEM's.  2, 1, 1 for high resolution DEM's in Alaska
16	A two-element array containing the number of rows and columns (m,n) of profiles in the DEM	INTEGER*2	216	853	864	When the row value m is set to 1 the n value describes the number of columns in the DEM file.

Note: Old format stops here

---

17	Largest primary contour interval	INTEGER*2	I5	865	869	Present only if two or more primary intervals exist.
18	Source contour interval units	INTEGER*1	I1	870		Corresponds to the units of the map largest primary contour interval 0=N.A., 1=feet, 2=meters.
19	Smallest primary	INTEGER*2	I5	871	875	Smallest or only primary contour interval
20	Source contour interval units	INTEGER*1	I1	876		Corresponds to the units of the map smallest primary contour interval. 1=feet, 2=meters.

Table 4-1. DEM Data Elements - Logical Record Type A (continued)

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format		Comment
			Starting byte	Ending byte	
21	Data source date	INTEGER*2	I4	877 880	YYMM two-digit year and two-digit month MM = 00 for source having year only.
22	Data inspection/ revision date	INTEGER*2	I4	881 884	YYMM two-digit year and two-digit month.
23	Inspection/ revision flag	ALPHA*1	A1	885	"I" or "R"
24	Data validation flag	INTEGER*1	I1	886	0= No validation performed.  1=TESDEM (record C added) no qualitative test (no DEM Edit System [DES] review).  2=Water body edit and TESDEM run.  3=DES (includes water edit) no qualitative test (no TESDEM).  4=DES with record C added, qualita-

tive and quantitative tests for  
level 1 DEM.

5=DES and TESDEM qualitative and  
quantitative tests for levels 2  
and 3 DEM's.

25	Suspect and void area flag	INTEGER*1	12	887	888
----	-------------------------------	-----------	----	-----	-----

0=none

1=suspect areas

2=void areas

3=suspect and void areas

Table 4-1. DEM Data Elements - Logical Record Type A (continued)

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format			Comment
			Starting byte	Ending byte		
26	Vertical datum	INTEGER*1	12	889	890	1=local mean sea level  2=National Geodetic Vertical Datum 1929 (NGVD 29) 3=North American Vertical Datum 1988 (NAVD 88)
27	Horizontal datum	INTEGER*1	12	891	892	1=North American Datum 1927 (NAD 27)  2=World Geodetic System 1972 (WGS 72)  3=WGS 84  4=NAD 83  5=Old Hawaii Datum  6=Puerto Rico Datum  7=NAD 83 Provisional (shifts in horizontal coordinates are

						computed, but old DEM nodes are not resampled)
28	Data Edition	INTEGER*2	14	893	896	01-99 Primarily a DMA specific field.
29	Percent Void	INTEGER*2	14	897	900	If element 25 indicates a void, this field (right justified) contains the percentage of nodes in the file set to void (- 32,767).

---



---

Table 4-2. DEM Data Elements - Logical Record Type B

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format			Comment
			Starting byte	Ending byte		
1	A two-element array containing the row and column identification number of the DEM profile contained in this record	INTEGER*2	216	1	12	The row/column numbers may range from 1 to m and 1 to n. The row number is normally set to 1. The column identification is the profile sequence number.
2	A two-element array containing the number (m, n) of elevations in the DEM profile	INTEGER*2	216	13	24	The first element in the field corresponds to the number of rows and columns of nodes in this profile. The second element is set to 1, specifying 1 column per B record.
3	A two-element array containing the ground planimetric coordinates (X,Y) of the first elevation in the profile	REAL*8	2D24.15	25	72	See Figures 4-1 and 4-2.

4	Elevation of local datum for the profile	REAL*8	D24.15	73	96	The values are in the units of measure given by data element 9, logical record type A.
---	--	--------	--------	----	----	--

Table 4-2. DEM Data Elements - Logical Record Type B (continued)

Data Element	(FORTRAN Notation)	Type ASCII Format	Physical Record Format		Comment	
			Starting byte	Ending byte		
5	A two-element array of minimum and maximum elevations for the profile	REAL*8	2D24.15	97	144	The values are in the unit of measure given by data element 9 in logical record type A.
6	A m,n array of elevations for the profile. Elevations are expressed in units of resolution in	INTEGER*2	mn(I6)	6x(146 or 170) 146 = max for first block. 170 = max for subsequent blocks		A value in this array would be multiplied by the spatial resolution value and added to the elevation of the local elevation datum for the element profile (data element 4 this record) to obtain the elevation for the point.



### **4.3 DATA MANIPULATION BY AERMAP**

The AERMAP preprocessor creates a direct access binary file and an index file for each DEM file containing only that portion of the DEM file that falls within the user-specified domain. These files are temporary, and enable the program to determine the elevation at a DEM node very efficiently. For example, if four adjacent DEM files are specified and a domain is defined as shown in Figure 2-1, then AERMAP will produce four direct access binary files, one for each DEM file, containing a subset of the terrain elevation data that lies within the domain (files 1, 2, 3 and 4 in Figure 2-1). The elevations in the direct access files are stored in meters. The order of the elevation points in these files will be the same as that of the original DEM file except that the coordinates of the baseline of the profile and the number of nodes in the profiles might be different. The new values for the baseline location and number of nodes are written to the index file corresponding to each DEM file. The program creates the direct access files using the same name as the DEM file but with an extension of 'DIR'. Similarly the index file corresponding to a DEM file will be the same file name but with an extension of 'IDX'. These files are deleted when the program ends.

### **4.4 DETERMINING RECEPTOR ELEVATIONS**

If the user requests the preprocessor to extract the receptor (and optional source) elevations from the DEM data using the CO TERRHGTS EXTRACT card, or if the CO TERRHGTS keyword is omitted, the following procedure is used to determine the elevation:

- For each receptor, the program searches through the DEM data index files to determine the two profiles (longitudes or eastings) that straddle this receptor.
- For each of these two profiles, the program then searches through the nodes in the index file to determine which two rows (latitudes or northings) straddle the receptor.
- The program then calculates the coordinates of these four points and determines the DEM direct access file and the record numbers that correspond to these points.

- It reads the elevations for these four points from the appropriate direct access file.
- The program will search the other adjacent DEM files following the above steps and retain the closest four nodes. One node in each of the northwest, northeast, southeast, and southwest quadrants where the quadrants' common point is the receptor location. Distances to, and the elevations of these DEM nodes is retained.
- A 2-dimensional distance-weighted interpolation is used to determine the elevation at the receptor location based on the elevations at the four nodes determined above.

When 7.5-minute DEM data are used, a receptor or source location may fall outside the range of the profiles when inside a DEM file (see Figure 4-1) or they may fall between the DEM files when the DEM files are from different datums. Elevations for all receptors or sources located near the edges of a DEM file are assigned values based on the nodes that are closest to the receptor or source location and may include elevations from two or more DEM files.

## 5.0 REFERENCES

- Environmental Protection Agency, 1995: Industrial Source Complex (ISC3) Dispersion Model User's Guide - Volume II. EPA-454/B-95-003b, U.S. Environmental Protection Agency, Research Triangle Park, North Carolina 27711.
- Environmental Protection Agency, 1998: Revised Draft User's Guide for the AMS/EPA Regulatory Model - AERMOD. U.S. Environmental Protection Agency, Research Triangle Park, North Carolina 27711.
- Environmental Research and Technology, 1987: User's Guide to the Rough Terrain Diffusion Model (RTDM), Rev. 3.20. ERT Document No. P-D535-585. Environmental Research and Technology, Inc., Concord, MA. (NTIS No. PB 88-171467)
- Perry, S.G., D.J. Burns, L.H. Adams, R.J. Paine, M.G. Dennis, M.T. Mills, D.J. Strimaitis, R.J. Yamartino and E.M. Insley, 1989: User's Guide to the Complex Terrain Dispersion Model Plus Algorithms for Unstable Situations (CTDMPLUS) Volume 1; Model Description and User Instructions. EPA Publication No. EPA-600/8-89-041. U.S. Environmental Protection Agency, Research Triangle Park, NC. (NTIS No. PB 89-181424)
- U.S. Department of the Interior, 1993: Digital Elevation Models Data User's Guide 5, U.S. Geological Survey, Earth Science Information Center.
- U.S. Geological Survey, 1987: Map Projections - A Working Manual, U.S. Geological Survey Professional Paper 1
- U.S. National Geodetic Survey, NADCON - North American Datum Conversion Utility, <http://www.ngs.noaa.gov:80/TOOLS/Nadcon/Nadcon.html>

## **APPENDIX A. ALPHABETICAL KEYWORD REFERENCE**

This appendix provides an alphabetical listing of all of the keywords used by the AERMAP preprocessor. Each keyword is identified as to the pathway for which it applies, the keyword type (either mandatory or optional, and either repeatable or non-repeatable), and with a brief description of the function of the keyword. For a more complete description of the keywords, including a list of associated parameters, refer to the Detailed Keyword Reference in Section 3 or the Functional Keyword/Parameter Reference in Appendix B.

Keyword	Path	Type	Keyword Description
ANCHORXY	CO	M - N	Relates the origin of the user-specified coordinate system for receptors to the UTM coordinate system
DATAFILE	CO	M - R	Specifies the names of the raw terrain data being provided to the preprocessor
DATATYPE	CO	M - N	Specifies the type of the raw terrain data being provided to the preprocessor
DISCCART	RE	O - R	Defines the discretely placed receptor locations referenced to a Cartesian system
DISCPOLR	RE	O - R	Defines the discretely placed receptor locations referenced to a polar system
DOMAINLL	CO	M - N	Allows the user to specify the domain extent in the latitude / longitude coordinate system
DOMAINXY	CO	M - N	Allows the user to specify the domain extent in the UTM coordinate system
ELEVUNIT	SO RE	O - N O - N	Defines the input units for the source elevations (SO pathway) or receptor elevations (RE pathway)
EVALCART	RE	O - R	Defines discrete Cartesian receptors for use with EVALFILE output
FINISHED	ALL	M - N	Identifies the end of inputs for a particular pathway
FLAGPOLE	CO	O - N	Specifies whether to accept receptor heights above local terrain (m) for use with flagpole receptors, and allows for a default flagpole height to be specified
GRIDCART	RE	O - R	Defines a Cartesian grid receptor network
GRIDPOLR	RE	O - R	Defines a polar receptor network
LOCATION	SO	O - R	Specifies the location of sources
RECEPTOR	OU	M - N	Specifies the output filename for the receptor data
RUNORNOT	CO	M - N	Identifies whether to run program or process setup information only
SOURCLOC	OU	O - N	Specifies the output filename for the source location data
STARTING	ALL	M - N	Identifies the start of inputs for a particular pathway
TERRHGTS	CO	O - N	Controls whether the receptor elevations should be extracted from the terrain data or that the user-provided receptor elevations should be used
TITLEONE	CO	M - N	First line of title for output
TITLETWO	CO	O - N	Optional second line of output title

## APPENDIX B. FUNCTIONAL KEYWORD/PARAMETER REFERENCE

This appendix provides a functional reference for the keywords and parameters used by the input runstream files for the AERMAP preprocessor. The keywords are organized by functional pathway, and within each pathway the order of the keywords is based on the function of the keyword within the preprocessor. The pathways used by the preprocessor are as follows, in the order in which they appear in the runstream file and in the tables that follow:

- CO** - for specifying overall job **CO**ntrOl options; and
- SO** - for specifying **SO**urce location information (optional);
- RE** - for specifying **RE**ceptor information; and
- OU** - for specifying **OU**tput file information.

The pathways and keywords are presented in the same order as in the Detailed Keyword Reference in Section 3, and in the Quick Reference at the end of the manual.

Two types of tables are provided for each pathway. The first table lists all of the keywords for that pathway, identifies each keyword as to its type (either mandatory or optional and either repeatable or non-repeatable), and provides a brief description of the function of the keyword. The second type of table presents the parameters for each keyword, in the order in which they should appear in the runstream file where order is important, and describes each parameter in detail.

The following convention is used for identifying the different types of input parameters. Parameters corresponding to secondary keywords which should be input "as is" are listed on the tables with all capital letters and are underlined. Other parameter names are given with an initial capital letter and are not input "as is." In all cases, the parameter names are intended to be descriptive of the input variable being represented, and they often correspond to the Fortran variable names used in the preprocessor code. Parentheses around a parameter indicate that the parameter is optional for that keyword. The default that is taken when an optional parameter is left blank is explained in the discussion for that parameter.

**TABLE B-1**  
**DESCRIPTION OF CONTROL PATHWAY KEYWORDS**

CO Keywords	Type	Keyword Description
STARTING	M - N	Identifies the start of CONTROL pathway inputs
TITLEONE	M - N	First line of title for output
TITLETWO	O - N	Optional second line of title for output
TERRHGTS	O - N	Controls whether the receptor elevations should be extracted from the user-provided terrain data or that the user-provided receptor terrain elevations should be used
FLAGPOLE	O - N	Specifies whether to accept receptor heights above local terrain (m) for use with flagpole receptors, and allows for default flagpole height to be specified
DATATYPE	M - N	Specifies the type of the raw terrain data being provided to the preprocessor
DATAFILE	M - R	Specifies the names of the raw terrain data being provided to the preprocessor
DOMAINLL	M <sup>1</sup> - N	Allows the user to specify the domain extent in the latitude / longitude coordinate system
DOMAINXY	M <sup>1</sup> - N	Allows the user to specify the domain extent in the UTM coordinate system
ANCHORXY	M - N	Relates the origin of the user-specified coordinate system for receptors to the UTM coordinate system
RUNORNOT	M - N	Identifies whether to run program or process setup information only
FINISHED	M - N	Identifies the end of CONTROL pathway inputs

Type:    M - Mandatory                      N - Non-Repeatable  
              O - Optional                        R - Repeatable

- 1)            Either the DOMAINLL or the DOMAINXY keyword must be used.

**TABLE B-2**  
**DESCRIPTION OF CONTROL PATHWAY KEYWORDS**  
**AND PARAMETERS**

Keyword	Parameters	
TITLEONE	Title1	
where:	Title1	First line of title for output, character string of up to 68 characters
TITLETWO	Title2	
where:	Title2	Second line of title for output, character string of up to 68 characters
TERRHGTS	<u>EXTRACT</u> or <u>PROVIDED</u>	
where:	<u>EXTRACT</u> <u>PROVIDED</u>	Instructs the preprocessor to determine the terrain heights from the DEM data files provided by the user (default) Forces the preprocessor to use the user-specified receptor elevations that are entered on the receptor pathway (also applies to source elevations specified on the optional source pathway)
FLAGPOLE	(Flagdf)	
where:	Flagdf	Default value for height of (flagpole) receptors above local ground level, a value of 0.0 m is used if this optional parameter is omitted
DATATYPE	<u>DEM1</u> or <u>DEM7</u>	
where:	<u>DEM1</u> <u>DEM7</u>	Specifies that 1-degree DEM Data will be used Specifies that 7.5-minute DEM data will be used
DATAFILE	Demfil	
where:	Demfil	Identifies the name of the DEM data file
DOMAINLL	Lonmin Latmin Lonmax Latmax	
where:	Lonmin Latmin Lonmax Latmax	Longitude in decimal degrees for the <u>lower right</u> (SE) corner of the domain Latitude in decimal degrees for the <u>lower right</u> (SE) corner of the domain Longitude in decimal degrees for the <u>upper left</u> (NW) corner of the domain Latitude in decimal degrees for the <u>upper left</u> (NW) corner of the domain
DOMAINXY	Xdmin Ydmin Zonmin Xdmax Ydmax Zonmax	
where:	Xdmin Ydmin Zonmin Xdmax Ydmax Zonmax	UTM East coordinate for the <u>lower left</u> (SW) corner of the domain in meters UTM North coordinate for the <u>lower left</u> (SW) corner of the domain in meters UTM Zone for the <u>lower left</u> (SW) corner of the domain UTM East coordinate for the <u>upper right</u> (NE) corner of the domain in meters UTM North coordinate for the <u>upper right</u> (NE) corner of the domain in meters UTM Zone for the <u>upper right</u> (NE) corner of the domain
ANCHORXY	Xauser Yauser Xautm Yautm Zautm	
where:	Xauser Yauser Xautm Yautm Zautm Nada	The X coordinate of any geographic location (typically the origin 0,0) in the user coordinate system The Y coordinate of any geographic location (typically the origin 0,0) in the user coordinate system The UTM East coordinate of the same geographic location specified as Xauser,Yauser The UTM North coordinate of the same geographic location specified as Xauser,Yauser The UTM Zone of the same geographic location corresponding to Xautm, Yautm The datum from which the Xautm, Yautm coordinates were drawn
RUNORNOT	<u>RUN</u> or <u>NOT</u>	
where:	<u>RUN</u> <u>NOT</u>	Indicates to run full preprocessor calculations Indicates to process setup data and report errors, but to <u>not</u> run full preprocessor calculations

**TABLE B-3**  
**DESCRIPTION OF SOURCE PATHWAY KEYWORDS**

SO Keywords	Type	Keyword Description
STARTING	M - N	Identifies the start of SOURCE pathway inputs
LOCATION	M - R	Identifies source locations for use in extracting source elevations and/or to define the origin of discrete polar receptors
FINISHED	M - N	Identifies the end of SOURCE pathway inputs

**TABLE B-4**  
**DESCRIPTION OF SOURCE PATHWAY KEYWORDS AND**  
**PARAMETERS**

Keyword	Parameters	
LOCATION	Srcid Srctyp Xs Ys (Zs)	
where:	Srcid Srctyp Xs  Ys Zs	Alphanumeric source ID, up to eight characters Source type: <u>POINT</u> , <u>VOLUME</u> , <u>AREA</u> , <u>AREAPOLY</u> , <u>AREACIRC</u> x-coordinate (Easting) of source location, corner for <u>AREA</u> , vertex for <u>AREAPOLY</u> , center for <u>AREACIRC</u> (m) y-coordinate (Northing) of source location (m) Optional z-coordinate of source location (elevation above mean sea level in meters)

**TABLE B-5**  
**DESCRIPTION OF RECEPTOR PATHWAY KEYWORDS**

RE Keywords	Type	Keyword Description
STARTING	M - N	Identifies the start of RECEPTOR pathway inputs
ELEVUNIT	O - N	Defines input units for receptor elevations (defaults to meters), must be first keyword after RE STARTING if used.
GRIDCART	O <sup>1</sup> - R	Defines a Cartesian grid receptor network
GRIDPOLR	O <sup>1</sup> - R	Defines a polar receptor network
DISCCART	O <sup>1</sup> - R	Defines the discretely placed receptor locations referenced to a Cartesian system
DISCPOLR	O <sup>1</sup> - R	Defines the discretely placed receptor locations referenced to a polar system
EVALCART	O <sup>1</sup> - R	Defines discrete Cartesian receptor locations for use with EVALFILE output option
FINISHED	M - N	Identifies the end of RECEPTOR pathway inputs

- 1) At least one of the following must be present: GRIDCART, GRIDPOLR, DISCCART, DISCPOLR, or EVALCART. Multiple receptor networks can be specified in a single run, including both Cartesian and polar, up to an overall maximum controlled by the NREC parameter.

**TABLE B-6**  
**DESCRIPTION OF RECEPTOR PATHWAY KEYWORDS**  
**AND PARAMETERS**

Keyword	Parameters	
ELEVUNIT	<u>METERS</u> or <u>FEET</u>	
where:	<u>METERS</u> <u>FEET</u>	Specifies input units for receptor elevations of meters Specifies input units for receptor elevations of feet Note: This keyword applies to receptor elevations only.
GRIDCART	Netid <u>STA</u> or <u>XYINC</u> <u>XPNTS</u> <u>YPNTS</u> <u>ELEV</u> <u>FLAG</u> <u>END</u>	Xinit Xnum Xdelta Yinit Ynum Ydelta Gridx1 Gridx2 Gridx3 .... GridxN, and Gridy1 Gridy2 Gridy3 .... GridyN Row Zelev1 Zelev2 Zelev3 ... ZelevN Row Zflag1 Zflag2 Zflag3 ... ZflagN
where:	Netid <u>STA</u> <u>XYINC</u> Xinit Xnum Xdelta Yinit Ynum Ydelta <u>XPNTS</u> Gridx1 GridxN <u>YPNTS</u> Gridy1 GridyN <u>ELEV</u> Row Zelev <u>FLAG</u> Row Zflag <u>END</u>	Receptor network identification code (up to eight alphanumeric characters) Indicates <u>STA</u> rt of GRIDCART subpathway, repeat for each new Netid Keyword identifying grid network generated from x and y increments Starting x-axis grid location in meters Number of x-axis receptors Spacing in meters between x-axis receptors Starting y-axis grid location in meters Number of y-axis receptors Spacing in meters between y-axis receptors Keyword identifying grid network defined by a series of x and y coordinates Value of first x-coordinate for Cartesian grid Value of 'nth' x-coordinate for Cartesian grid Keyword identifying grid network defined by a series of x and y coordinates Value of first y-coordinate for Cartesian grid Value of 'nth' y-coordinate for Cartesian grid Keyword to specify that receptor elevations follow Indicates which row (y-coordinate fixed) is being input An array of receptor terrain elevations for a particular Row Keyword to specify that flagpole receptor heights follow Indicates which row (y-coordinate fixed) is being input An array of receptor heights above local terrain elevation for a particular Row (flagpole receptors) Indicates <u>END</u> of GRIDCART subpathway, repeat for each new Netid

**TABLE B-6 (CONT.)**  
**DESCRIPTION OF RECEPTOR PATHWAY KEYWORDS**  
**AND PARAMETERS**

GRIDPOLR	Netid <u>STA</u> <u>ORIG</u> Xinit Yinit, or <u>ORIG</u> Srcid <u>DIST</u> Ring1 Ring2 Ring3 ... RingN <u>DDIR</u> Dir1 Dir2 Dir3 ... DirN, or <u>GDIR</u> Dirnum Dirini Dirinc <u>ELEV</u> Dir Zelev1 Zelev2 Zelev3 ... ZelevN <u>FLAG</u> Dir Zflag1 Zflag2 Zflag3 ... ZflagN <u>END</u>		
where:	<table border="0"> <tr> <td style="vertical-align: top;">           Netid  <u>STA</u>  <u>ORIG</u>            Xinit            Yinit            Srcid  <u>DIST</u>            Ring1            RingN  <u>DDIR</u>            Dir1            DirN  <u>GDIR</u>            Dirnum            Dirini            Dirinc  <u>ELEV</u>            Dir            Zelev  <u>FLAG</u>            Dir            Zflag    <u>END</u> </td> <td style="vertical-align: top;">           Receptor network identification code (up to eight alphanumeric characters)            Indicates <u>STA</u>rt of GRIDPOLR subpathway, repeat for each new Netid            Optional keyword to specify the origin of the polar network (assumed to be at x=0, y=0 if omitted)            x-coordinate for origin of polar network            y-coordinate for origin of polar network            Source ID of source used as origin of polar network            Keyword to specify distances for the polar network            Distance to the first ring of polar coordinates            Distance to the 'nth' ring of polar coordinates            Keyword to specify discrete direction radials for the polar network            First direction radial in degrees (1 to 360)            The 'nth' direction radial in degrees (1 to 360)            Keyword to specify generated direction radials for the polar network            Number of directions used to define the polar system            Starting direction of the polar system            Increment (in degrees) for defining directions            Keyword to specify that receptor elevations follow            Indicates which direction is being input            An array of receptor terrain elevations for a particular direction radial            Keyword to specify that flagpole receptor heights follow            Indicates which direction is being input            An array of receptor heights above local terrain elevation for a particular direction (flagpole receptors)            Indicates <u>END</u> of GRIDPOLR subpathway, repeat for each new Netid         </td> </tr> </table>	Netid <u>STA</u> <u>ORIG</u> Xinit Yinit Srcid <u>DIST</u> Ring1 RingN <u>DDIR</u> Dir1 DirN <u>GDIR</u> Dirnum Dirini Dirinc <u>ELEV</u> Dir Zelev <u>FLAG</u> Dir Zflag  <u>END</u>	Receptor network identification code (up to eight alphanumeric characters) Indicates <u>STA</u> rt of GRIDPOLR subpathway, repeat for each new Netid Optional keyword to specify the origin of the polar network (assumed to be at x=0, y=0 if omitted) x-coordinate for origin of polar network y-coordinate for origin of polar network Source ID of source used as origin of polar network Keyword to specify distances for the polar network Distance to the first ring of polar coordinates Distance to the 'nth' ring of polar coordinates Keyword to specify discrete direction radials for the polar network First direction radial in degrees (1 to 360) The 'nth' direction radial in degrees (1 to 360) Keyword to specify generated direction radials for the polar network Number of directions used to define the polar system Starting direction of the polar system Increment (in degrees) for defining directions Keyword to specify that receptor elevations follow Indicates which direction is being input An array of receptor terrain elevations for a particular direction radial Keyword to specify that flagpole receptor heights follow Indicates which direction is being input An array of receptor heights above local terrain elevation for a particular direction (flagpole receptors) Indicates <u>END</u> of GRIDPOLR subpathway, repeat for each new Netid
Netid <u>STA</u> <u>ORIG</u> Xinit Yinit Srcid <u>DIST</u> Ring1 RingN <u>DDIR</u> Dir1 DirN <u>GDIR</u> Dirnum Dirini Dirinc <u>ELEV</u> Dir Zelev <u>FLAG</u> Dir Zflag  <u>END</u>	Receptor network identification code (up to eight alphanumeric characters) Indicates <u>STA</u> rt of GRIDPOLR subpathway, repeat for each new Netid Optional keyword to specify the origin of the polar network (assumed to be at x=0, y=0 if omitted) x-coordinate for origin of polar network y-coordinate for origin of polar network Source ID of source used as origin of polar network Keyword to specify distances for the polar network Distance to the first ring of polar coordinates Distance to the 'nth' ring of polar coordinates Keyword to specify discrete direction radials for the polar network First direction radial in degrees (1 to 360) The 'nth' direction radial in degrees (1 to 360) Keyword to specify generated direction radials for the polar network Number of directions used to define the polar system Starting direction of the polar system Increment (in degrees) for defining directions Keyword to specify that receptor elevations follow Indicates which direction is being input An array of receptor terrain elevations for a particular direction radial Keyword to specify that flagpole receptor heights follow Indicates which direction is being input An array of receptor heights above local terrain elevation for a particular direction (flagpole receptors) Indicates <u>END</u> of GRIDPOLR subpathway, repeat for each new Netid		

**TABLE B-6 (CONT.)**  
**DESCRIPTION OF RECEPTOR PATHWAY KEYWORDS**  
**AND PARAMETERS**

DISCCART	Xcoord Ycoord (Zelev) (Zflag)	
where:	Xcoord Ycoord Zelev  Zflag	x-coordinate for discrete receptor location y-coordinate for discrete receptor location Elevation above sea level for discrete receptor location (optional), used only for <u>ELEV</u> terrain Receptor height (flagpole) above local terrain (optional), used only with <u>FLAGPOLE</u> keyword
DISCPOLR	Srcid Dist Direct (Zelev) (Zflag)	
where:	Srcid  Dist Direct  Zelev Zflag	Specifies source identification for which discrete polar receptor locations apply (used to define the origin for the discrete polar receptor) Downwind distance to receptor location Direction to receptor location, in degrees clockwise from North Elevation above sea level for receptor location (optional), used only for <u>ELEV</u> terrain Receptor height (flagpole) above local terrain (optional), used only with <u>FLAGPOLE</u> keyword
EVALCART	Xcoord Ycoord Zelev Zflag Arcid (Name)	
where:	Xcoord Ycoord Zelev  Zflag  Arcid (Name)	x-coordinate for discrete receptor location y-coordinate for discrete receptor location Elevation above sea level for discrete receptor location (optional), used only for <u>ELEV</u> terrain Receptor height (flagpole) above local terrain (optional), used only with <u>FLAGPOLE</u> keyword Receptor arc ID used to group receptors along an arc or other grouping (up to eight characters) Optional name for receptor (up to eight characters)

**TABLE B-7**  
**DESCRIPTION OF OUTPUT PATHWAY KEYWORDS**

OU Keywords	Type	Keyword Description
STARTING	M - N	Identifies the start of OUTPUT pathway inputs
RECEPTOR	M - N	Identifies the output filename for receptor data
SOURCLOC	O - N	Identifies the output filename for source location data
FINISHED	M - N	Identifies the end of OUTPUT pathway inputs

**TABLE B-8**  
**DESCRIPTION OF OUTPUT PATHWAY KEYWORDS AND**  
**PARAMETERS**

Keyword	Parameters	
RECEPTOR	Recfil	
where:	Recfil	Specifies output filename for receptor data
SOURCLOC	Srcfil	
where:	Srcfil	Specifies output filename for source location data

## APPENDIX C. EXPLANATION OF ERROR MESSAGE CODES

### C.1 INTRODUCTION

The AERMAP preprocessor uses a "defensive programming" approach to eliminate as much as possible of the user's work in debugging the input runstream file. Also, a great deal of effort has been made to eliminate the possibility of run time errors, such as "divide by zero," and to point out questionable input data.

Message Summary: The AERMAP preprocessor outputs a summary of messages to the message file specified on the command line. This message table gives the number of messages of each type, together with a detailed list of all the fatal errors and warning messages. During setup processing, if no errors or warnings are generated, then the program simply reports to the user that "SETUP Finishes Successfully."

### C.2 THE OUTPUT ERROR LOG MESSAGE SUMMARY

There are two message summaries provided in the message file generated by the AERMAP preprocessor. The first one is located after the echo of input runstream file images. This summary will take one of two forms, depending on whether any fatal error or non-fatal warning messages were generated, and also depending on whether the option to RUN or NOT to run was selected on the CO RUNORNOT card. If there are no errors or warnings generated during the setup processing, and the RUN option was selected, then the program simply reports that "SETUP Finishes Successfully." If any fatal errors or warning messages were generated during the setup processing, or if the option NOT to run was selected, then a more detailed summary is provided. This summary provides a message count for each type of message, and a detailed listing of each fatal error and warning message generated. The second message summary table is located at the very end of the message file, and it sums up the messages generated by the complete preprocessor run - both setup processing and run-time processing.

An example of a setup processing message summary is shown in Figure C-1.

```
*** Message Summary For The AERMAP Preprocessor Setup ***

----- Summary of Total Messages -----
A Total of          0 Fatal Error Message(s)
A Total of          0 Warning Message(s)
A Total of          0 Information Message(s)

***** FATAL ERROR MESSAGES *****
*** NONE ***

***** WARNING MESSAGES *****
*** NONE ***

*****
*** SETUP Finishes Successfully ***
*****
```

FIGURE C-1. EXAMPLE OF AN AERMAP MESSAGE SUMMARY

### C.3 DESCRIPTION OF THE DETAILED MESSAGE LAYOUT

Two types of messages can be produced by the program during the processing of input runstream images and during preprocessor calculations. These are described briefly below:

- Errors that will halt any further processing, except to identify additional error conditions (type E); and
- Warnings that do not halt processing but indicate possible errors or suspect conditions (type W).

The messages have a consistent structure which contains the pathway ID, indicating which pathway the messages are generated from; the message type followed by a three-digit message number; the line number of the input runstream image file for setup messages; the name of the module (e.g. the subroutine name) from which the message is generated; a detailed message corresponding to the message code; and an 8-character simple hint to help the user spot the possible source of the problem.



## C.4 DETAILED DESCRIPTION OF THE ERROR/MESSAGE CODES

### INPUT RUNSTREAM IMAGE STRUCTURE PROCESSING

This type of message indicates problems with the basic syntax and/or structure of the input runstream image. Typical messages include errors like "Missing mandatory keyword", "Illegal Keyword", ..., etc. If a fatal error of this kind is detected in a runstream image, a fatal error message is written to the message file and any attempt to process data is prohibited, although the remainder of the runstream file is examined for other possible errors. If a warning occurs, data may still be processed, although the inputs should be checked carefully to be sure that the condition causing the warning does not indicate an error.

- 100 Invalid Pathway Specified. The pathway ID should be a 2 character string. It should be one of the following: CO for control pathway or RE for receptor pathway. Its position is normally confined to columns 1 and 2 (1:2) of the input runstream file. However, the program does allow for a shift of the entire input runstream file of up to 3 columns. If the inputs are shifted, then all input records must be shifted by the same amount. The invalid pathway is repeated at the end of the message.
- 105 Invalid Keyword Specified. The keyword ID should be an 8-character string. Its position is normally confined to columns 4 to 11 (4:11) of the input runstream file. However, the program does allow for a shift of the entire input runstream file of up to 3 columns. If the inputs are shifted, then all input records must be shifted by the same amount. There should be a space between keyword ID and any other data fields. For a list of valid keywords, refer to Appendix A or Appendix B. The invalid keyword is repeated at the end of the message.
- 110 Keyword is Not Valid for This Pathway. The input keyword is a valid 8-character string, but it is not valid for the particular pathway. Refer to Appendix A, Appendix B or Section 3 for the correct usage of the keyword. The invalid keyword is repeated at the end of the message.
- 115 Starting and Finishing Statements do not match. Only One STARTING and one FINISHED statement, respectively, is allowed at the very beginning and the very end of each pathway block. Check the position and frequency to make sure the input runstream file meets the format requirement. The pathway during which the error occurs is included at the end of the message.
- 120 Pathway is Out of Sequence. The pathways are not input in the correct order. The correct order is CO, SO (optional), RE, and OU for the AERMAP preprocessor. The offending pathway is given as a hint.
- 125 Missing FINISHED Statement - Runstream file is incomplete. One or more FINISHED statements are missing.
- 130 Missing Mandatory Keyword. To run the program, certain mandatory keywords must present in the input runstream file. For a list of mandatory keywords, see Appendix A or Appendix B. For more detailed information on keyword setup, see the description of message code 105. The missing keyword is included with the message.

- 135 Duplicate Non-repeatable Keyword Encountered. More than one instance of a non-repeatable keyword is encountered. For a list of non-repeatable keywords, see Appendix A or Appendix B. The repeated keyword is included with the message.
- 140 Invalid Order of Keyword. A keyword has been placed out of the acceptable order. The order for most keywords is not critical, but the relative order of a few keywords is important for the proper interpretation of the input data. The keyword reference in Section 3 identifies any requirements for the order of keywords. The keyword that was out of order is included with the message.
- 152 ELEVUNIT card must be first for this pathway. The ELEVUNIT card must be the first non-commented card after STARTING when used on the RE pathway. This requirement is made in order to simplify reviewing runstream files to determine the elevation units used for sources and receptors.
- 160 Duplicate ORIG Secondary Keyword for GRIDPOLR. Only one origin card may be specified for each grid of polar receptors. The network ID for the affected grid is included with the message.
- 170 Invalid Secondary Keyword for Receptor GRID. The network ID for the affected grid is included with this message. Refer to Appendix B for the correct syntax of secondary keywords.
- 175 Missing Secondary Keyword END for Receptor Grid. The END secondary keyword is required for each grid of receptors input by the user (keywords GRIDCART and GRIDPOLR). It signals the end of inputs and triggers the processing of data for that particular network.
- 180 Conflicting Secondary Keyword for Receptor Grid. Two incompatible secondary keywords have been input for the same grid of receptors, e.g. GDIR and DDIR for the keyword GRIDPOLR, where GDIR specifies to generate directions with uniform spacing, and DDIR specifies that discrete, non-uniform directions are being specified.
- 185 Missing Receptor Keywords. No Receptors Specified. Since none of the RE pathway keywords are mandatory, a separate error check is made to determine if any of the RE keywords are specified. At least one of the following keywords must be present: GRIDCART, GRIDPOLR, DISCCART, DISCPOLR, or EVALCART.

## PARAMETER SETUP PROCESSING

This type of message indicates problems with processing of the parameter fields for the runstream images. Some messages are specific to certain keywords, while others indicate general problems, such as an invalid numeric data field. If a fatal error of this kind is detected in a runstream image, a fatal error message is written to the message file and any attempt to process data is prohibited, although the remainder of the runstream file is examined for other possible errors. If a warning occurs, data may still be processed, although the inputs should be checked carefully to be sure that the condition causing the warning does not indicate an error.

- 200 Missing Parameter(s). No options were selected for the indicated keyword. Check Appendix B for the list of parameters for the keyword in question.
- 201 Not Enough Parameters Specified For The Keyword. Check if there are any missing parameters following the indicated keyword. See Appendix B for the required keyword parameters.
- 202 Too Many Parameters Specified For The Keyword. Refer to Appendix B or Section 3 for the list of acceptable parameters.
- 203 Invalid Parameter Specified. The inputs for a particular parameter are not valid for some reason. Refer to Appendix B or Section 3. The invalid parameter is included with the message.
- 205 No Option Parameter Setting. Forced by Default to: No setting was specified for a particular parameter. Refer to Appendix B or Section 3 for the correct parameter usage. The default setting is specified with the message.
- 207 No Parameters Specified. Default Values Used For. The keyword for which no parameters are specified is included with the message. Refer to Appendix B or Section 3 for a discussion of the default condition.
- 208 Illegal Numerical Field Encountered. The program may have encountered a non-numerical character for a numerical input, or the numerical value may exceed the limit on the size of the exponent, which could potentially cause an underflow or an overflow error.
- 209 Negative Value Appears For A Non-negative Variable. The affected variable name is provided with the message.
- 212 END Encountered Without (X,Y) Points Properly Set. This error occurs during setting up the grid of receptors for a Cartesian Network. This message may occur for example if X-coordinate points have been specified without any Y-coordinate points for a particular network ID.
- 214 ELEV Inputs Inconsistent With Option: Defaults Used. This message occurs when the user does not input elevated terrain heights for receptors when the TERRHGTS option is PROVIDED. The program assumes that the missing terrain heights are at 0.0 meters for those receptors and proceeds with ELEV terrain modeling.
- 215 FLAG Inputs Inconsistent With Option: Input Ignored. This message occurs when the user inputs receptor heights above ground for flagpole receptors when the FLAGPOLE keyword option has not been specified. The input flagpole heights are ignored in the program calculations.
- 216 FLAG Inputs Inconsistent With Option: Defaults Used. This happens when the user does not input receptor heights above ground for flagpole receptors when the FLAGPOLE keyword option has been specified. The program assumes that the missing flagpole heights are equal to the default value specified on the CO FLAGPOLE card. If no default height is specified on the FLAGPOLE card, then a default of 0.0 meters is assumed.
- 217 More Than One Delimiter In A Field.

- 218 Number of (X,Y) Points Not Match With Number Of ELEV Or FLAG. Check the number of elevated terrain heights or flagpole receptor heights for the gridded network associated with the indicated line number in the runstream file.
- 219 Number Of Receptors Specified Exceeds Maximum. The user has specified more receptors on the RE pathway than the program array limits allow. This array limit is controlled by the NREC PARAMETER specified in the AERMAP.INC file. The value of NREC is provided with the message.
- 220 Missing Origin (Use Default = 0,0) In GRIDPOLR. This is a non-fatal warning message to indicate that the ORIG secondary keyword has not been specified for a particular grid of polar receptors. The program will assume a default origin of (X=0, Y=0).
- 221 Missing Distance Setting In Polar Network. No distances have been provided (secondary keyword DIST) for the specified grid of polar receptors.
- 222 Missing Direction Setting In Polar Network. Missing a secondary keyword (secondary keyword GRIR or DDIR) for the specified grid of polar receptors.
- 223 Missing Elevations or Flagpole Fields. No data fields have been specified for the indicated secondary keyword.
- 224 Number of Receptor Networks Exceeds Maximum. The user has specified more receptor networks of gridded receptors on the RE pathway than the program array limits allow. This array limit is controlled by the NNET PARAMETER specified in the AERMAP.INC file. The value of NNET is provided with the message.
- 225 Number of X-Cords Specified Exceeds Maximum. The user has specified more X-coordinate values for a particular grid of receptors than the program array limits allow. This array limit is controlled by the IXM PARAMETER specified in the AERMAP.INC file. The value of IXM is provided with the message.
- 226 Number of Y-Cords Specified Exceeds Maximum. The user has specified more Y-coordinate values for a particular grid of receptors than the program array limits allow. This array limit is controlled by the IYM PARAMETER specified in the AERMAP.INC file. The value of IYM is provided with the message.
- 227 No Receptors Were Defined on the RE Pathway. Either through lack of inputs or through errors on the inputs, no receptors have been defined.
- 228 Default(s) Used for Missing Parameters on Keyword. Either an elevated terrain height or a flagpole receptor height or both are missing for a discrete receptor location. Default value(s) will be used for the missing parameter(s).
- 229 Too Many Parameters - Inputs Ignored on Keyword. Either an elevated terrain height or a flagpole receptor height or both are provided when the corresponding option has not been specified. The unneeded inputs are ignored.
- 232 Number of Specified Sources Exceeds Maximum. The user has specified more sources than the array limits allow. This array limit is controlled by the NSRC PARAMETER specified in the AERMAP.INC file. The value of NSRC is provided with the message.

- 250 Duplicate XPNT/DIST or YPNT/DIR Specified for GRID. One of the grid inputs, either an X-coordinate, Y-coordinate, polar distance range or polar direction, has been specified more than once for the same grid of receptors. This generates a non-fatal warning message.
- 252 Duplicate Receptor Network ID Specified. A network ID for a grid of receptors (GRIDCART or GRIDPOLR keyword) has been used for more than one network.
- 254 Number of Receptor Arcs Exceeds Maximum. The user has input more than the number of receptors arcs specified by the NARC PARAMETER in the AERMAP.INC file. The value of NARC is provided with the message.

#### SETUP DATA AND QUALITY ASSURANCE PROCESSING

This type of message indicates problems with the actual values of the parameter data on the input runstream image. The basic structure and syntax of the input card is correct, but one or more of the inputs is invalid or suspicious. These messages include quality assurance checks on various preprocessor inputs. Typical messages will tell the consistency of parameters and data for the setup and run of the program. If a fatal error of this kind is detected in a runstream image, a fatal error message is written to the message file and any attempt to process data is prohibited. If a warning occurs, data may or may not be processed, depending on the processing requirements specified within the run stream input data.

- 300 Receptor Not Inside Domain. This is a fatal error generated when one of the receptors specified in the RE pathway lies outside the domain specified on the CO pathway. The receptor number is given with the message.
- 305 Source Not Inside Domain. This is a fatal error generated when one of the source locations specified in the SO pathway lies outside the domain specified on the CO pathway. The source number is given with the message.
- 310 Domain Coordinate is NOT Inside a DEM File. This is a fatal error generated when one of the domain coordinates lies outside the range of data covered by the DEM files included on the CO pathway.
- 320 DEM File Does Not Exist. This is a fatal error generated when one of the DEM data files specified on the CO pathway is not found.
- 330 Receptor is Not Inside a DEM File. This is a fatal error generated when one of the receptors lies outside all of the DEM files specified by the user. The receptor number is included with the message.
- 335 Source is Not Inside a DEM File. This is a fatal error generated when one of the source locations lies outside all of the DEM files specified by the user. The source number is included with the message.
- 340 No Terrain File Adjacent to This One. This is a fatal error generated when one of the DEM data files is found to not be adjacent to any of the other data files specified. The DEM file number is reported, and the file number represents the order of the file in the runstream.

- 350 Number of Nodes Exceeds Maximum. The number of nodes specified for a given profile exceeds the maximum number set by the MAXNOD parameter in AERMAP.INC. The profile number is specified with the message.
- 360 Latitude Specified on DOMAINLL Exceeds 60 Degrees. This is a non-fatal warning message issued if a latitude of greater than 60 degrees is specified for the domain on the DOMAINLL card. It may indicate that the order of longitude and latitude are reversed on the input data.
- 370 DATATYPE Card Does Not Match DEM Data File. The message indicates that the type of DEM data, as determined from the file header record, for the file number specified does not match the type specified on the DATATYPE card.
- 375 Specified Source ID Has Not Been Defined Yet. The message indicates that the user attempts to use a source ID on a keyword before defining this source ID on a SO LOCATION card. It could indicate an error in specifying the source ID, an omission of a LOCATION card, or an error in the order of inputs.
- 377 Duplicate LOCATION Card Specified for Source. There can be only one LOCATION card for each source ID specified. The source ID is included with the message.
- 380 This Input Variable is Out-of-Range. The indicated value may be too large or too small. Use the line number to locate the card in question, and check the variable for a possible error.

#### RUNTIME MESSAGE PROCESSING, 400-499

This type of message is generated during the preprocessor run. Setup processing has been completed successfully, and the message is generated during the performance of calculations. If a fatal error of this kind is detected during model execution, a fatal error message is written to the message file and any further processing of the data is prohibited. The rest of the data file(s) will be read and quality assurance checked to identify additional errors. If a warning occurs, data will still be processed.

- 410 Receptor Location Outside Range of Profiles. This is a non-fatal warning message indicating that a receptor location falls near the edge of a 7.5-minute DEM file and is outside the range of the data profiles. If receptor elevations are being extracted from the DEM data, the nodes from the nearest profile are used for this receptor.
- 420 Source Location Outside Range of Profiles. This is a non-fatal warning message indicating that a source location falls near the edge of a 7.5-minute DEM file and is outside the range of the data profiles. If source elevations are being extracted from the DEM data, the nodes from the nearest profile are used for this source.

## INPUT/OUTPUT MESSAGE PROCESSING

This type of message is generated during the preprocessor input and output. Typical messages will tell the type of I/O operation (e.g., opening, reading or writing to a file), and the type of file. If a fatal error of this kind is detected in a runstream image, a fatal error message is written to the message file and any attempt to process data is prohibited. If a warning occurs, data may or may not be processed, depending on the processing requirements specified within the run stream input data.

- 500 Fatal Error Occurs During Opening of the Data File. The file specified can not be opened properly. This may be the runstream file itself, or one of the DEM input data files. This may happen when the file called is not in the specified path, or an illegal filename is specified. Refer to the line number included in the error message to identify which file caused the error. If no errors are found in the filename specification, then this message may also indicate that there is not enough memory available to run the program, since opening a file causes a buffer to be opened which takes up additional memory in RAM.
- 505 File is Already in Use, Cannot be Opened. The specified data file is already in use and could not be opened. This error may indicate that a duplicate data filename has been specified.
- 510 Fatal Error Occurs During Reading of the File. File type is incorrect, or illegal data field encountered. Check the indicated file for possible problems. For a DEM data file, be sure that file has been converted to a DOS-compatible format using the CRLF.EXE program (provided with the AERMAP package). As with error number 500, this message may also indicate that there is not enough memory available to run the program if no other source of the problem can be identified.
- 520 Fatal Error Occurs During Writing to the File. Similar to message 510, except that it occurs during a write operation.
- 550 DEM File Conflict for Specified DEM File Number. This error indicates a conflict in the specification of DEM data files. It may be caused by entering a duplicate filename for a DEM file.
- 580 End-of-File Reached Trying to Read a Data File. The AERMAP preprocessor has unexpectedly encountered an end-of-file trying the read the indicated file. Check the data file for the correct filename.