APPLICATION FOR DUST CONTROL PERMIT

Formerly Part Of "Application For An Earthmoving Permit"

There are three sections in this application:

Section 1 - Applicant Information

Section 2 - Project Information

Section 3 - Dust Control Plan

In order for the application to be complete, answer all of the questions in all three sections. Submit the completed application and the appropriate fee to the Maricopa County Air Quality Department.

To complete this application, please use the Guidance For Application For Dust Control Permit, which contains details and explanations of the information required in this application. The guidance includes details and explanations of the information required in this application. Also, please note that if you are completing this application and you are the "applicant", then you are the responsible authority for controlling all aspects of all the work accomplished on-site from initial groundbreaking to final stabilization.

Also, as an "applicant", you are responsible for closing-out the Dust Control Permit when the project is complete and/or when you no longer have control over the day-to-day operations on the site. Refer to Maricopa County Air Pollution Control Regulations Rule 200 (Permit Requirements) and Rule 310 (Fugitive Dust) for more information regarding the requirements and work practices associated with this application. Both of these rules are available at 1001 North Central Avenue or at: http://www.maricopa.gov/aq

Fo	r Office Use Or	nly
District #		
Area #		
NOV #		
Permit #		
Fee Paid/Acreage		
Date Issued		
Approved By		
NESHAP		
Cross Streets		

Date Stamp Here

Section 1 - Applicant Information

1.	Applicant: Check all	that apply:	
	☐Property Owner☐Developer☐Lessee	☐General / Prime Contractor	
	Name:		
	Applicant Address:		
	City/State/Zip:		
	Phone:	Fax:	
	E-Mail Address:		
	Local Mailing Address (if not the same as above):	
	Contractor License Nur	nber:	
1a		olly Owned Subsidiary Of Another Company? □Yes	□No
	•	answered "yes" above, please provide the following information:	
1b	. Parent Company	Name:	
	Address:		
	Phone:	Fax:	
	State Of Incorporation:		

2.	Property Owr	ner / Developer, If Not A	Applicant:			-
	Address:					_
						_
	Phone:		Fax	··		_
	Contact Person:_					_
•	Duim am Duais					
3.	Primary Proje	ect Contact:				-
	Title:		_ Company Nam	ne:		_
	On-Site Phone:_		Mobile:		Fax:	_
	E-Mail Address:_					_
4.	Signature Of	A Responsible Official	Of The Applica	ant:		
	information in the	that, based on information a e Application For Dust Contro on, and Section 3-Dust Contro	ol Permit, including	g Section 1-App	licant Information, Section 2	
		Official Of The Applicant is the Maricopa County Air Qua				
		Statute §13-2704 makes it a n connection with an applicati				to
	Signature:					_
	Printed Name: _		Title:			_
45	Company Pro	esident / Owner:				
4a		esident / Owner:				-
						-
						-
				-		-
5.	Application C	Completed By, If Not Sig	gnatory:			
	Printed Name:		Title:			_
	Phone:		Fax:			_

Section 2 - Project Information (See Guidance Pages 7 - 12)


	E-mail:				
6.	Address Of Project	Location: (If no address available)	able include block #, asses	ssor's parcel #,	GPS coordinates,
e	etc.)				
		/South:			
		West:			
		er(s) (if no address available):_			
		address available):			
		Range:			
		Unincorporated Area	☐ Incorporated	d Area	
7.	Name Of Project:				
8.	Description Of Proj	ect:			
_	WILL A December 1	. Hardana and I Bankina E) - - 10		
9.	Will A Basement Of	^r Underground Parking E	se Excavated?	□Yes	□No
9a	. Will Building Occur	On A Pre-Existing Pad	Prepared Pad?	□Yes	□No
	J	J	•	_	_
10	-	Physical Area (Acres) Th			
		uding Staging And Stoc		emporary	Storage
	Talus.				
	Estimated acres to be gra	aded, if different from size of pr	oject indicated above:_		
	Estimated cubic yards to	be moved within the boundarie	es of the project:		
	Estimated amount of imp	ort material:	_ Estimated amount of	export materi	al:
	Duning Clark Dates				
	. Project Start Date:				
11	a.Estimated Duration	n Of Project:			
11	b.Estimated Duratio	n Of Each Of The Follow	ing Project Phases	S :	
٧	Vork To Be Performed	Total Acres Disturbed	Number Of Days Disturbed	Acres D	isturbed Per Day

Site Clearing/Mass Grading

Underground Utilities

12. Attach Project Site Drawing (A Dust Control/Demolition Permit-1 Acre Or Larger will not be issued, unless a drawing is submitted. Attach a separate page (8½" x 11") with a drawing showing all of the following elements:

- Entire project site boundaries
- Acres to be disturbed with linear dimensions (including staging areas, stockpiles, and storage)
- · Nearest public cross-roads
- North arrow
- Planned exit locations onto paved areas accessible to the public

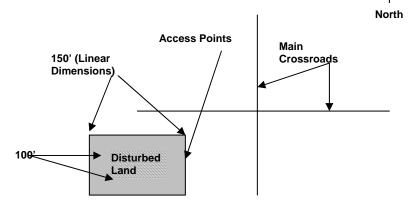

13. Indicate Soil Designations From Appendix F In Maricopa County Air Pollution Control Regulations Or Attach A Copy of The Site Geotechnical Report

For construction projects one acre or larger, except for routine maintenance and repair done under a block permit, designate in the table below which soil texture is naturally present on the work site and which soil texture will be imported onto the work site (if applicable). If the soil on the work site has been tested, then you should rely on the test results to complete the table and you should attach a copy of the site soil report (boring logs) to this application. If the soil on the work site has not been tested, then use Appendix F in the Maricopa County Air Pollution Control Regulations to complete the table below.

Soil Texture Naturally Present On Work Site	Soil Texture To Be Imported Onto Work Site

14.Is This A Re-Application?	□Yes	Previous Permit #	□No

A permit is valid for 1 year after date of issuance/approval. The re-application process takes a minimum of 14 days for approval and must be approved prior to expiration of old permit. You must re-apply for a permit more than 14 days before original permit expires.

15. Asbestos NESHAP Notification Requirements

All facilities scheduled for demolition or renovation (see definitions below) must be inspected by a currently certified Asbestos Hazard Emergency Response Act (AHERA) Asbestos Building Inspector. There is no waiver of this requirement based on the age of the facility. The inspection must be performed within 12 months of commencement of demolition or renovation activity. Questions concerning the Asbestos NESHAP regulation should be referred to Maricopa County's Asbestos NESHAP Coordinator at 602-506-6708 or 602-506-0421. Forms may be obtained at http://www.maricopa.gov/aq/Asbestos/a-forms.asp.

Demolition: The wrecking or taking out of any load-supporting structural member of a facility together with any related handling operations or the intentional burning of a facility.

Renovation: Altering a facility or one or more facility components in any way, including the stripping or removal of RACM from a facility component.

Does The Project Include Demolition Or Ren	ovation?	□Yes	□No
Description Of Demolition/Renovation Activi	ities:		
Date Of Asbestos Inspection:			
County Plat Number Of Property	(),(),(
). Book	Мар	Parcel Split
Is This A Residential Property?		□Yes	□No
If Yes, Is There More Than One Structure On	The Property?	□Yes	□No
Please Describe Each Structure:			
If Residential Property, Has The Property Ev Purpose?	<u>er</u> Been Used For	A Commerci	al/Industrial
		∐Yes	□No
If Yes, Has An Asbestos Inspection Beel Inspector Within The Last 12 Months?	n Conducted By	An AHERA	

Section 3 - Dust Control Plan (See Guidance Page 13)

When completing the following Dust Control Plan, use the Guidance For Application Fr Dust Control Permit - Section 3 - Instructions to help you select dust control measures and keep in mind the following:

- Categories and/or sub-categories of dust generating operations C3, C5, D1, F, and G, in the following Dust Control Plan, have primary control measures, "P", required by Rule 310. You will need to choose a contingency measure, "C", for these dust generating operations.
- Where has replaced a "P", the dust control measure cannot be used as a primary control measure.
- Where has replaced a "C", the dust control measure cannot be used as a contingency control measure and is required to be used as a primary control measure.
- Where "Other" is listed without reference to opacity or surface stabilization standard(s) and is selected
 as a primary control measure, then the description must meet the criteria in the Guidance For
 Application For Dust Control Permit Section 3 Unlisted Dust Control Measures (See Guidance Page
 12).

After your Application For Dust Control Permit has been approved, <u>you must post</u> your Dust Control Permit and Dust Control Plan on-site.

A. Vehicles/Motorized Equipment

(See Guidance Page 17)

1. Use In Open Areas

P	С	Restrict	t tresp	ass by	install	ing signs	;							
rees	С	Install p	ohysic	al barri	iers to	prevent	t acc	ess:	curbs,	fences,	gates, p	osts, sigi	ns, shru	ubs or
.1003						(Circle sel	ected	meas	ure(s))					
P	С	Other	(so	that	the	standa	rds	in	Rule	310,	Section	302.3	are	met)
applica	able	Or,	ex	_ olain	١	why	thi	S	con	itrol	measu	ıre	is	not

2. Unpaved Parking Lots

Р	С	Apply water, so that the standards in Rule 310, Section 302.1 are met (Fill Out Section I)
P Date 0	C	Apply water in combination with dust suppressant(s), so that that one of the standards in
Rule 3	10,	Section 302.1 is met (Fill Out Section J)
Р	С	Apply and maintain gravel, recycled asphalt, or other suitable material, so that the standards in Rule 310, Section 302.1 are met
P Droice	C ·*	Pave (Choose one of the following): Beginning Of Project* During Project* End Of
Projec met		*Must stabilize surface prior to paving, so that the standards in Rule 310, Section 302.1 are
P	С	Apply and maintain dust suppressant(s), other than water, so that the standards in Rule
310,		Section 302.1 are met (Fill Out Section J)
	С	Limit vehicle speed to 15 m.p.h. on the site
P	C	Other (so that the standards in Rule 310, Section 302.1 are met)
	_	Or, explain why this control measure is not applicable
	_	3. Unpaved Haul Roads/Access Areas
P	С	Limit vehicle trips to no more than 20 per day per road AND limit vehicle speeds to no more
than		15 m.p.h. In the space provided, list the maximum number of vehicle trips on the unpaved
haul		roads/access areas each day (including number of employee vehicles, earthmoving
equipn	nent,	haul trucks, and water trucks)
Р	С	Apply water, so that the standards in Rule 310, Section 302.2(a) are met (Fill Out Section I)
P	С	Apply water in combination with dust suppressant(s), so that the standards in Rule 310,
Sectio	n	302.2(a) are met (Fill Out Section J)
Р	С	Pave (Choose one of the following): Beginning Of Project* During Project* End Of Project* *Must stabilize surface prior to paving, so that the standards in Rule 310, Section 302.2(a)
are		met
Р	С	Apply and maintain surface gravel, recycled asphalt, or other suitable material, so that the standards in Rule 310, Section 302.2(a) are met

P 310	С	Apply and maintain dust suppressant(s), other than water, so that the standards in Rule
310	,	Section 302.2(a) are met (Fill Out Section J)
	С	Cease operations
Р	С	Other (so that the standards in Rule 310, Section 302.2(a) are met)
		Or, explain why this control measure is not applicable
		B. Disturbed Surface Areas (See Guidance Pages 17 - 18)
Р	С	1. Before Dust Generating Operations Occur Pre-water site to the depth of cuts, so that the standards in Rule 310, Section 301 are met (Fill Out Section I)
Р	С	Phase work to reduce the amount of disturbed surface area at any one time Attach a map delineating the phases and their extent
Р	С	Other (so that the standards in Rule 310, Section 301 are met)
		Or, explain why this control measure is not applicable
Р	С	2. During Dust Generating Operations Apply water, so that the standards in Rule 310, Section 301 are met (Fill Out Section I)
Р	С	Apply and maintain dust suppressant(s) other than water, so that the standards in Rule
310),	Section 301 are met (Fill Out Section J)
Р	С	Apply water in combination with dust suppressant(s), so that the standards in Rule 310, Section 301 are met (Fill Out Section J)
Р	С	Construct wind barrier fences (in conjunction with one of the above listed measures)
	С	Cease operations
	С	Limit vehicle speed to 15 m.p.h. on the work site
Р	С	Other (so that the standards in Rule 310, Section 301 are met)
		Or, explain why this control measure is not applicable
P	С	3. Temporary Stabilization Including Weekends, After Work Hours, Holidays, And Periods Up-To 8 Months Apply water or other dust suppressant, so that the standards in Rule 310, Section 302.3 are
met	İ	

(Fill Out Section I or J) Ρ С Apply and maintain gravel, recycled asphalt, or other suitable material, so that the standards in Rule 310, Section 302.3 are met C Establish vegetative ground cover (landscaping), so that the standards in Rule 310, Section 302.3 are met C Ρ Pave (Choose one of the following): Beginning Of Project* **During Project*** End Of Project* *Must stabilize surface prior to paving, so that one of the above stabilization standards is met C Restrict vehicular access to area in addition to (1) applying water or other dust suppressant(s) to establish and maintain a visible crust or (2) establishing vegetative ground cover (landscaping), so that the standards in Rule 310, Section 302.3 are met Ρ C Other (so that the standards in Rule 310, Section 302.3 are met) Or, explain why this control measure is not applicable _____ 4. Permanent Stabilization Of Open Areas And Vacant Lots Required Within 8 Months Of Ceasing Dust Generating Operations

Apply water, so that the standards in Rule 310, Section 302.3 are met (Fill Out Section I)

Ρ

C

P adjace	C	Restore area such that the vegetative ground cover and soil characteristics are similar to
		or nearby undisturbed native conditions (desert xeriscaping)
P 302.3	С	Establish vegetative ground cover (landscaping), so that the standards in Rule 310, Section
002.0		are met
Р	С	Pave (Choose one of the following): Beginning Of Project* During Project* End Of Project* *Must stabilize surface prior to paving, so that one of the above stabilization standards is
met		3,
Р	С	Construct building, house, structure, and / or floor
P	С	Apply and maintain dust suppressant(s) other than water (so that the standards in Rule 310, Section 302.3 are met) (Fill Out Section J)
Р	С	Other (so that the standards in Rule 310, Section 302.3 are met)
		Or, explain why this control measure is not applicable
	_	

C. Bulk Material Handling

(See Guidance Pages 18 - 19)

1. Prior To And/Or During Stacking, Loading, And Unloading Operations Apply water, so that the standards in Rule 310, Section 302.3 are met (Fill Out Section I) Ρ C Ρ C Apply water in combination with dust suppressant(s) at a frequency and intensity, so that the standards in Rule 310, Section 301 are met (Fill Out Section J) C Pre-water and maintain surface soils in a stabilized condition where support equipment and vehicles will operate, so that the standards in Rule 310, Section 301 are met (Fill Out Section I) C Remove material from the downwind side of the storage pile when safe to do so C Empty loader bucket slowly and keep loader bucket close to the truck to minimize the drop height while dumping C Cease operations C Other (so that the standards in Rule 310, Section 301 are met) Or, explain why this control measure is not applicable Open Storage Piles C Apply water, so that the standards in Rule 310, Section 302.3 are met (Fill Out Section I) P C Apply water in combination with dust suppressant(s), so that the standards in Rule 310, Section 302.3 are met (Fill Out Section J) Ρ C Cover open storage piles with tarps, plastic, or other material C Apply water to maintain soil moisture content at a minimum of 12% (Fill Out Section I) C Apply water to maintain at least 70% of the optimum soil moisture content, for areas that have an optimum moisture content for compaction of less than 12% (Fill Out Section I) P C Maintain vegetative cover, so that the standards in Rule 310, Section 302.3 are met C Construct wind barrier fences (in conjunction with one of the above listed measures) Ρ C Other (so that the standards in Rule 310, Section 308.6 are met) Or, explain why this control measure is not applicable

3. On-Site Hauling
Within The Boundaries Of The Work Site
And Crossing A Paved Area Accessible To The Public

P	.+	Required: Load all haul trucks such that the freeboard is not less than 3 inches AND
prever	ıı	spillage or loss of bulk material from holes or other openings in the cargo compartment
AND		install suitable trackout control device
	С	Limit vehicle speed to 15 m.p.h. on the work site
	С	Cease operations
	С	Other (so that the standards in Rule 310, Section 301 are met)
	_	Or, explain why this control measure is not applicable
P emissi	C	4. On-Site Hauling Within The Boundaries Of The Work Site Limit vehicle speed to 15 m.p.h. or less while traveling on the work site such that visible
CITIIOSI	5113	coming-off the load do not exceed 20% opacity
Р	С	Apply water to the top of the load, so that the standards in Rule 310, Section 301 are met (Fill Out Section I)
P Rule	С	Apply dust suppressant(s) other than water to the top of the load, so that the standards in
IXule		310, Section 301 are met (Fill Out Section J)
P	С	Cover haul trucks with a tarp or other suitable closure
	С	Cease operations
Р	С	Other (so that the standards in Rule 310, Section 301 are met)
		Or, explain why this control measure is not applicable
P	•	Onto Paved Areas Accessible To The Public Required: Cover haul trucks with a tarp or other suitable closure AND load all haul trucks such that the freeboard is not less than 3 inches AND prevent spillage or loss of bulk material from holes or other openings in the cargo compartment AND clean the interior of the cargo compartment of empty haul trucks before leaving the site
	С	Apply water to the top of the load, so that the standards in Rule 310, Section 301 are met (Fill Out Section I)
	С	Apply dust suppressant(s) other than water to the top of the load, so that the standards in Rule 310, Section 301 are met (Fill Out Section J)
	С	Cease operations

	С	Other (so that the standards in Rule 310, Section 301 are met)							
		Or, explain	why this contro	ol measure is no	t applicabl	e			
		D. Trac		rryout, S (See Guidance Pag		e, And	l Erosior	1	
	_	disturbed	t control device	ackout Cor e must be install r if a work site h per day.	ed if a wor	k site has		of	
P		Required: I	nstall at all ex	its to a paved a	area acces	ssible to th	e public at lea	st one of the	
followir	ıy.	grave	el pad g	(Circle all that a rizzly whe		ystem	paved area		
	С	Cease ope	rations						
Р	С	Other (so the	nat the standar	ds in Rule 310, S	Section 30	1 are met)			
	Or, explain why this control measure is not applicable 2. Cleaning Trackout/carryout must be cleaned up immediately if trackout/carryout extends more than 50 feet along a paved area accessible to the public.								
				pe cleaned up <u>n</u> s <u>less than 50 fe</u>					
P	С	Operate a	street sweeper	or wet broom v	vith sufficion	ent water (e.g. kick broom	n, steel bristle	
broom,		teflon	broom,	vacuum)	on	the	following	schedule:	
P	С	Manually	sweep-up	deposits	on	the	following	schedule:	
P	С	Other (so the	nat the standar	ds in Rule 310, S	Section 30	1 are met) <u>.</u>			
		Or, explain	why this contro	ol measure is no	t applicabl	e			
		E. We	ed Abate	ement By (See Guidance F		ng Or	Blading		

1. <u>Disturbance Operations</u>

r		blading, so that one of the standards in Rule 310, Section 301 are met (Fill Out Section I)
P abater	nont	Required: Apply water in combination with dust suppressant(s) before and during weed
Section		by discing or blading, so that the standards in Rule 310, Section 301 are met (Fill Out
	С	Limit vehicle speed to 15 m.p.h. during discing and blading operations
	С	Cease operations
	С	Other (so that the standards in Rule 310, Section 301 are met)
	_	Or, explain why this control measure is not applicable
	_	2. <u>Stabilization</u>
Р	С	Pave immediately following weed abatement
P	С	Apply gravel to establish and maintain a threshold friction velocity for disturbed surface
areas		corrected for non-erodible elements of 100 cm/second or higher
P	С	Apply gravel to establish and maintain a percent cover that is equal to or greater than 10%
for		non-erodible elements
Р	С	Apply water or other dust suppressant(s) to establish and maintain a visible crust (Fill Out Section I Or J)
P 302.3	С	Establish vegetative ground cover (landscaping), so that the standards in Rule 310, Section
302.3		are met
Р	С	Other (so that the standards in Rule 310, Section 308.8 are met)
		Or, explain why this control measure is not applicable

F. Blasting Operations (See Guidance Page 21)

Р		Required: Discontinue blasting, if wind gusts above 25 m.p.h.						
P	a ont	Required: Pre-water AND maintain surface soils in a stabilized condition where support						
equipment		and vehicles will operate, so that the standards in Rule 310, Section 302.1 or Section 302.2 are met (Fill Out Section I)						
P 310,	С	Apply water or water in combination with dust suppressants, so that the standards in Rule						
		Section 302.1 or Section 302.2 are met (Fill Out Section I Or J)						
P Cootion	С	Apply water in combination with dust suppressant(s), so that the standards in Rule 310,						
Section	1	302.1 and Section 302.2 are met (Fill Out Section J)						
	С	Other (so that the standards in Rule 310, Section 301 are met)						
	_	Or, explain why this control measure is not applicable.						
		G. Demolition Activities (See Guidance Page 21)						
P								
P P		(See Guidance Page 21) Required: Apply water or water in combination with dust suppressant(s) to demolition debris immediately following demolition activity, so that the standards in Rule 310, Section 301 are met						
	C C	Required: Apply water or water in combination with dust suppressant(s) to demolition debris immediately following demolition activity, so that the standards in Rule 310, Section 301 are met (Fill Out Section I Or J) Required: Apply water or water in combination with dust suppressant(s) to all surrounding areas and to all disturbed soil surfaces immediately following demolition activity, so that the						
	C C	Required: Apply water or water in combination with dust suppressant(s) to demolition debris immediately following demolition activity, so that the standards in Rule 310, Section 301 are met (Fill Out Section I Or J) Required: Apply water or water in combination with dust suppressant(s) to all surrounding areas and to all disturbed soil surfaces immediately following demolition activity, so that the standards in Rule 310, Section 301 are met (Fill Out Section I Or J)						
		Required: Apply water or water in combination with dust suppressant(s) to demolition debris immediately following demolition activity, so that the standards in Rule 310, Section 301 are met (Fill Out Section I Or J) Required: Apply water or water in combination with dust suppressant(s) to all surrounding areas and to all disturbed soil surfaces immediately following demolition activity, so that the standards in Rule 310, Section 301 are met (Fill Out Section I Or J) Thoroughly clean debris from paved and other surfaces following demolition activity						

1. When Dust

Generating Operation Is Occurring

		<u> </u>						
P C average		Cease dust generating operation for the duration of the wind event when the 60-minute						
ceased		wind speed is greater than 25 m.p.h. and stabilize work area, if dust generating operation is						
		for the remainder of the work day						
P outside	C the	Apply water or other suitable dust suppressant at least twice per hour (once per hour if						
		nonattainment area), so that the standards in Rule 310, Section 301 are met (Fill Out Section I Or J)						
P ASTM	С	Apply water to maintain soil moisture content at a minimum of 12%, as determined by						
7.011		Method D2216-98 or other equivalent method as approved by the Control Officer and the Administrator Of The Environmental Protection Agency (Fill Out Section I)						
P 98, or	С	Maintain at least 70% of the optimum soil moisture content for areas that have an optimum moisture content for compaction of less than 12%, as determined by ASTM Method D2216-						
90, OI		other equivalent method as approved by the Control Officer or the Administrator Of The Environmental Protection Agency (Fill Out Section I)						
P	C ainment	Apply water or other suitable dust suppressant(s) at least twice (once if outside the						
less	allillelli	area) per hour and construct fences or three-foot to five-foot high wind barriers with 50% or						
leaving	1	porosity adjacent to roadways or urban areas to reduce the amount of windblown material						
icaving	1	the site (Fill Out Section I Or J)						
	С	Other (so that the standards in Rule 310, Section 301 are met)						
		Or, explain why this control measure is not applicable						
		2. <u>Temporary Disturbed Surface Areas</u> After Work Hours, Weekends, And Holidays						
D	C	Apply and maintain surface gravel or dust suppressant(s) so that one of the stabilization						

- P C Apply and maintain surface gravel or dust suppressant(s),so that one of the stabilization standards in Rule 310, Section 302.3 is met (Fill Out Section I Or J)
- P C Apply water or water in combination with dust suppressant(s) to all disturbed surface areas three times per day, so that one of the stabilization standards in Rule 310, Section 302.3 is met. If there is evidence of windblown dust, increase watering frequency to a minimum of four times per day.

 (Fill Out Section I Or J)
- P C Apply water or water in combination with dust suppressant(s) on open storage piles at least twice per hour (once per hour if outside the nonattainment area) to maintain a visible crust (Fill Out Section I Or J)

P	С	Cover	Cover open storage piles with tarps, plastic, or other material such that wind will not remove									ove			
the		cover	coverings												
met)_	С	Other	(so	that	one	of	the	stabilization	standards	in	Rule	310,	Section	302.3	is
		Or, ex	plain	why t	his co	ontro	ol me	asure is not a	pplicable						
								. Wateı	•						
						(uidance Pages							
syster	m" me	ans how ater availa	wate ability	er wil mear	l be i	appl ter s	<u>ied</u> 1 suppl	e site (e.g. (2 to the site. (6 y in conjunction	e.g. 1 fire hon with the v	nose wate	e, (3) er appl	1,000 lication	gal. wat system.		
_		<u>Sit</u>	e Clo	<u>earin</u>	<u>g / R</u>			Of Vegetat			/ Dem	olitio	<u>n</u>		
Supply	У							<u>mber</u> mber	Application	<u>)</u>					
□Met	tered H	ydrant							□Hose						
□Wa	ter Tow	er								ruck	(
□Wa	ter Pon	d							☐Water Pull ☐Water Buffalo						
Oth	ner														
									Other_						
							N	Mass Gradir	ng						
Supply	У						e/Nu	<u>mber</u>	<u>Application</u>	<u>1</u>					
∏Ме₁	tered H	vdrant				Siz	e/Nu	<u>mber</u>	□Hose						
	ter Tow	•							☐Water T	ruck	(
	ter Pon								☐Water P		-				
		ŭ							☐Water B		lo				
	· • · · · · · · · · · · · · · · · · · ·								Other_						
															

Underground Utilities

Supply	Size/Number	<u>Application</u>	
☐Metered Hydrant	<u>Size/Number</u>	□Hose	
☐Water Tower			
☐Water Pond		☐Water Pull	
Other		☐Water Buffalo	
		Other	
	Unpaved Haul Road		
Supply	<u>Size/Number</u> <u>Size/Number</u>	<u>Application</u>	
☐Metered Hydrant		□Hose	
☐Water Tower			
☐Water Pond		☐Water Pull	
Other		☐Water Buffalo	
		Other	
Supply	<u>Vertical / Pav</u> <u>Size/Number</u>	<u>red</u> Application	
	Size/Number		
☐Metered Hydrant		□Hose	
☐Water Tower			
☐Water Pond		☐Water Pull	
Other		☐Water Buffalo	
		Other	
Committee	Staging / Parking		
Supply	<u>Size/Number</u> Size/Number	<u>Application</u>	
☐Metered Hydrant		□Hose	
☐Water Tower			
☐Water Pond		☐Water Pull	
Other		☐Water Buffalo	
		Other	
	Structure Excav	vation value	
Supply	Size/Number	<u>Application</u>	
☐Metered Hydrant	Size/Number	□Hose	
☐Water Tower		☐Water Truck	
☐Water Pond		☐Water Pull	
		_	

Other		☐Water Buffalo	
		Other	
	Fine Grad	ding	
Supply	Size/Number	<u>Application</u>	
☐Metered Hydrant	<u>Size/Number</u>	□Hose	
☐Water Pond			
Other		☐Water Buffalo	
		Other	

J. Dust Suppressants (See Guidance Pages 25 - 35)

Although water is a dust suppressant, the information required by Table J should not include information on water supply and water application. The information required by Table J is for all other dust suppressants that you use. Fill out the applicable areas in the table below and attach information on environmental impacts and approvals or certifications related to appropriate and safe use for ground application. Also, attach product specification(s) and application sheet(s) or label instructions.

Application Section	Manufacturer Name	Product	Application Frequency *	Intensity**
A				
Vehicles/Motorized Equipment				
В				
Disturbed Surface Areas				
C Bulk Material Handling				
D Trackout, Carryout, Spillage, And Erosion				
E Weed Abatement By Discing Or Blading				
F Blasting Operations				
G Demolition Activities				
H Wind Event				

How often the surface will receive a complete application of dust suppressant (e.g. 3 times a day)

The amount used over a period of time (e.g. gallons/minute)