



# Market Characterization of the U.S. Onboard Aerospace Fire Suppression Industry

**Prepared for:**

Stratospheric Protection Division  
Office of Air and Radiation  
U.S. Environmental Protection Agency  
Washington, D.C. 20460

**Prepared by:**

ICF  
2550 S Clark St.  
Suite 1200  
Arlington, VA 22202

**September 2021**

## Table of Contents

1. Summary .....	1
2. Introduction .....	2
3. Market Characterization .....	3
3.1. Overview of Onboard Commercial Aviation Fire Suppression Systems .....	3
3.2. Major Manufacturers .....	6
4. Subsector Background and HFC Use .....	6
4.1. Fire Suppressants in Airplanes and Rotorcraft.....	6
4.2. Current and Projected Use of HFCs in the Commercial Aviation Fire Suppression Subsector.....	9
4.3. Imports and Exports of Commercial Aviation Fire Suppression Systems in the United States 14	
5. References.....	15

## 1. Summary

Onboard aerospace fire suppression is considered to be used in fire suppression equipment on board commercial and general aviation aircraft, including commercial-derivative aircraft for military use; rotorcraft; and space vehicles.<sup>1</sup> This definition excludes military aircraft other than commercial-derivative aircraft for military use. Onboard commercial aviation fire suppression systems, which have historically used halons, are installed on mainline and regional passenger and freighter aircraft to protect valuable and sensitive assets (UNEP 2018b, ICAO 2016, ICAO 2019a). Commercial-derivative aircraft include those aircraft intended for sale to military customers that are built using commercial aircraft designs that are modified for military use, or those aircraft built to commercial specifications and then modified for military use (Boeing 2021b).<sup>2</sup> Fire suppression systems onboard aircraft can be divided into two main product categories: total flooding systems and streaming applications; currently hydrofluorocarbons (HFCs), specifically HFC-236fa and HFC-227ea, have replaced halon 1301 in total flooding systems in lavatory trash receptacles (UNEP 2018b, Robin 2011; Jensen Hughes, Inc. 2015). Due to perceived weight and volume restrictions or penalties (e.g., increased fuel consumption), HFCs have not been popularized in other fire suppression systems onboard aircraft (ICAO 2016, ICAO 2019a).

Note that this market characterization currently focuses on commercial aviation, including commercial-derivative aircraft for military use and rotorcraft, due to the limited available data on the use of HFCs for fire suppression for space vehicles. EPA has previously defined “space vehicle” as “a man-made device, either manned or unmanned, designed for operation beyond earth's atmosphere. This definition includes integral equipment such as models, mock-ups, prototypes, molds, jigs, tooling, hardware jackets, and test coupons. Also included is auxiliary equipment associated with test, transport, and storage, which through contamination can compromise the space vehicle performance.”<sup>3</sup> Industry has indicated that HFC-227ea is in use in fire suppression systems onboard space vehicles (Raytheon 2021), however data on the quantity of HFCs in use is not currently available. Other reported uses (other than fire suppression) include cold gas propulsion systems for small spacecraft (e.g., satellites) to produce thrust by expelling an inert non-toxic propellant, including HFC-236fa or HFC-134a, with the quantities estimated at 50 kg per satellite, varying between systems and mission.<sup>4</sup>

Starting in 2006, HFCs have been used in lavatory trash receptacle fire suppression systems in new aircraft, and over the period of 2006 to 2020, HFCs also replaced all halon 1301 lavatory trash receptacle fire suppression systems in existing aircraft. In 2020, approximately 0.38 metric

---

<sup>1</sup> Note that there are additional uses of HFCs onboard aircraft in other sectors (e.g., refrigeration, solvents), which are not within the proposed definition of onboard aerospace fire suppression and, thus, are not considered in this market characterization.

<sup>2</sup> Boeing comment to docket, see EPA-HQ-OAR-2021-0044-0117 at [www.regulations.gov](http://www.regulations.gov).

<sup>3</sup> 40 CFR 82.62

<sup>4</sup> [https://www.nasa.gov/sites/default/files/atoms/files/soa2018\\_final\\_doc.pdf](https://www.nasa.gov/sites/default/files/atoms/files/soa2018_final_doc.pdf)

tons (MT) of HFC-227ea and 0.30 MT of HFC-236fa were installed in new aircraft lavatory fire suppression systems.<sup>5</sup> This is estimated to be 0.009% of the total fire suppression market and 0.0004% of the total HFC use in the United States.

Industry has indicated that identifying, testing, and approving alternatives can take upwards of fifteen years (Boeing 2020b) and, thus, absent transition to use of alternatives or reclaimed HFCs, the use of HFCs in lavatory fire suppression systems is expected to continue as new aircraft are sold; in 2025, approximately 0.67 MT of HFC-227ea and 0.46 MT of HFC-236fa is estimated to be installed in new aircraft lavatory fire suppression systems. This is estimated to be 0.013% of the total fire suppression market and 0.0007% of the total HFC use in the United States.

## 2. Introduction

Onboard commercial aviation fire suppression systems are installed throughout mainline and regional passenger and freighter aircraft, including engine nacelles, auxiliary power units (APUs),<sup>6</sup> lavatory trash receptacles, baggage/crew compartments, and handheld extinguishers (UNEP 2018b). The total number of commercial aircraft vehicles,<sup>7</sup> including commercial rotorcraft and commercial-derivative aircraft,<sup>8</sup> in the United States in 2020 by type is shown in Table 1.

**Table 1. Estimated Size of Airplane and Rotorcraft Fleet in the United States in 2020<sup>a</sup>**

Aircraft Type	Number of Aircraft Vehicles in 2020
Mainline Passenger Aircraft	18,703
Regional Passenger Aircraft	1,577
Mainline Freighter Aircraft	692
Regional Freighter Aircraft	133
Rotorcraft <sup>b</sup>	24

Source: Estimates were developed based on fleet and delivery estimates from Boeing (2017, 2020a) and Airbus (2017, 2019).

<sup>a</sup> Commercial-derivative aircrafts are considered in this estimate, no other military aircrafts are included.

<sup>b</sup> The commercial rotorcraft estimate was derived from global revenue breakdowns by region and major manufacturer market shares (Airbus 2021a, Airbus 2021b, Leonardo 2021).

<sup>5</sup> Lavatory systems are assumed to have negligible annual leak rates and are sent offsite for servicing. Therefore, servicing is not explicitly accounted for in HFC use estimates.

<sup>6</sup> The APU is a small turbine engine installed near the rear of an aircraft and serves as an additional energy source normally used to start one of the main engines on an airliner or business jet. The APU is equipped with an extra electrical generator to create enough power to operate onboard lighting, galley electrics and cockpit avionics, usually while the aircraft is parked at the gate (FlyingMag 2018).

<sup>7</sup> General aviation (i.e., private and business jets) are excluded in these estimates and the remainder of the market characterization. Because jets with less than 10 seats are not required to have lavatory trash receptacle systems, no HFCs are assumed to be in use in private and/or business aircraft (FAA 2020).

<sup>8</sup> Because data from references is separated as commercial, military, and helicopters and aircrafts for each sector are different, this analysis assumes that commercial-derivative aircrafts are included in the commercial aircraft analysis. In addition, this analysis assumes that the number of commercial-derivative aircraft vehicles is negligible compared to the commercial aircraft fleet. This analysis does not consider other military aircraft vehicles.

Fire suppression systems onboard aircraft have historically used halons, a class of halogenated chemicals containing bromine, as clean extinguishing agents (i.e., those that do not leave residue following system discharge) to protect valuable and sensitive assets (UNEP 2018b, ICAO 2016, ICAO 2019a). Halons have very high ozone depletion potentials (ODPs) because they contain bromine, which has a higher reactivity with ozone than chlorine.

Several alternatives to halons—including HFCs (i.e., HFC-236fa and HFC-227ea)—have been introduced in certain onboard commercial aviation fire suppression applications. Similar to halons, HFCs are also effective, clean agents that are non-conductive.

The remainder of this report characterizes HFC use in the commercial aviation fire suppression industry, including commercial-derivative aircraft and the rotorcraft industry, in the United States, including key market players and historical and current use of HFC fire suppressants in commercial aircraft lavatory fire suppression systems. Limited information was available on space vehicle fire suppression systems at the time this report was prepared. Industry has indicated that HFC-227ea is in use in fire suppression systems onboard space vehicles (Raytheon 2021), however data on the quantity of HFCs in use is not currently available. Other reported uses (other than fire suppression) include in cold gas propulsion systems for small spacecraft (e.g., satellites) to produce thrust by the expelling an inert non-toxic propellant, including HFC-236fa or HFC-134a, with the quantities estimated at 50 kg per satellite, varying between systems and mission.<sup>9</sup>

### 3. Market Characterization

This section provides an overview of fire suppression systems used onboard commercial aviation applications, including commercial-derivative aircraft and rotorcraft, as well as the current equipment market and key manufacturers.

#### 3.1. Overview of Onboard Commercial Aviation Fire Suppression Systems

Generally, fire suppression systems onboard commercial airplanes can be divided into two main product categories: total flooding systems and streaming applications.

- **Total flooding systems** are designed to automatically discharge a fire extinguishing agent by detection and related controls (or manually by a system operator) and achieve a specified minimum agent concentration throughout a confined space (i.e., volume percent of the agent in air).
- **Streaming applications** use portable fire extinguishers that can be manually manipulated to discharge an agent in a specific direction and release a specific quantity of extinguishing agent at the time of a fire.

---

<sup>9</sup> [https://www.nasa.gov/sites/default/files/atoms/files/soa2018\\_final\\_doc.pdf](https://www.nasa.gov/sites/default/files/atoms/files/soa2018_final_doc.pdf)

Table 2 lists the national standards related to fire extinguishing products aboard aircraft. These standards include requirements, specifications, and recommendations for the design, installation, testing, maintenance, and safety factors for different types of fire suppression agents in total flooding systems and streaming applications.

**Table 2. Standards for Fire Suppression Products Aboard Airplanes and Rotorcraft<sup>a,b</sup>**

Table 2. Standards for Fire Suppression Products Aboard Airplanes and Rotorcraft <sup>a,b</sup>		
National Fire Protection Association (NFPA) 408	Standard for Aircraft Hand Portable Fire Extinguishers	<ul style="list-style-type: none"> <li>Requirements for type and size of portable fire extinguishers for all types of aircraft</li> <li>Requirements for training flight-crew members on extinguisher use in the event of a fire onboard an aircraft</li> </ul>
Federal Aviation Administration (FAA) Minimum Performance Standard (MPS) (DOT/FAA/AR-01/37)	Handheld Fire Extinguishers as a Replacement for Halon 1211 on Civilian Transport Category Aircraft	<ul style="list-style-type: none"> <li>Specifies two extinguisher tests that replacement agents must pass in addition to requiring national certifications to ensure that replacement agents will meet or exceed performance of halon 1211 both in fighting fires and maintaining a safe breathing environment in aircraft cabins</li> </ul>
FAA MPS (DOT/FAA/TC-TN12/11)	Aircraft Cargo Compartment Halon Replacement Fire Suppression Systems	<ul style="list-style-type: none"> <li>Establishes the MPS that a halon 1301 replacement aircraft cargo compartment fire suppression system must meet as part of the aircraft certification procedures</li> </ul>
FAA MPS	Fire Extinguishing Agents/Systems of Civil Aircraft Engine and APU Compartments	<ul style="list-style-type: none"> <li>Establishes the MPS that engine and APU compartment fire extinguishing systems must meet</li> </ul>
FAA MPS (DOT/FAA/AR-96/122)	Lavatory Trash Receptacle Automatic Fire Extinguishers	<ul style="list-style-type: none"> <li>Establishes the MPS that an agent must meet and provides an equivalent level of safety to that of halon</li> <li>Establishes the fire load, trash disposal receptacle test article, test procedures, and pass/fail criteria for built-in extinguishers for lavatory disposal receptacles</li> </ul>



Sources: NFPA (2017), FAA (1997, 2002, 2012).


<sup>a</sup> FAA MPS for hand fire extinguishers for use in aircraft consider both onboard airplanes and rotorcraft (FAA 2011) and address requirements for 14 CFR parts 29 and 127, among others.

<sup>b</sup> NFPA 53 provides recommendations for the use of materials, equipment, and systems (e.g., fire extinguishing systems) in oxygen-enriched atmospheres (e.g., commercial and military aviation) (NFPA 2021).

Fires are classified as Class A, B, or C, as defined in Table 3 (FEMA 2015).

**Table 3. Classification of Fire Types in the United States Based on Fuel Hazard**

Symbol	Fire Type Classification	Fuel
	Class A	Ordinary combustibles (e.g., wood, paper, plastics)
	Class B	Flammable liquids (e.g., gasoline, petroleum oil and paint) and flammable gases (e.g., propane, butane)

Symbol	Fire Type Classification	Fuel
	Class C	Energized electrical equipment (e.g., motors, transformers, appliances)

Source: FEMA (2015).

### 3.1.1. Total Flooding Systems

Total flooding systems are used in both normally occupied and unoccupied areas in commercial aviation applications (UNEP 2018b). Total flooding systems are intended to provide a specified minimum agent concentration throughout a confined space to combat larger fires. Primary commercial aviation applications for total flooding systems in the United States include:

- Engine nacelles,
- APUs,
- Cargo compartments, and
- Lavatory trash receptacles (Robin 2011; Jensen Hughes, Inc. 2015).

Total flooding systems in engine nacelles and APUs typically protect against Class B fires. Due to the proximity to fuels and other volatile fluids, the requirements for fire systems for engine nacelle and APUs are especially challenging (UNEP 2018b). Total flooding systems in cargo compartments must be able to suppress Class A and Class B fires and must have sufficient ability to continue to provide fire suppression and safety from the initial fire warning through landing, often over 350 minutes (UNEP 2018b). Total flooding systems in lavatory trash receptacles are meant to extinguish receptacle fires in pressurized cabins' lavatories in the case of a Class A fire (ICAO 2016, ICAO 2019a).

Of these onboard commercial aircraft applications, HFCs are currently used only in lavatory trash receptacle fire suppression systems. Boeing and Airbus are using HFC-227ea and HFC-236fa in their aircraft, respectively for these applications (ICAO 2016, ICAO 2019a).

### 3.1.2. Streaming Applications

Streaming applications in onboard commercial aviation applications include portable fire extinguishers designed to protect against specific hazards. Portable fire extinguishers are intended as a first line of defense for fires of limited size. The selection and installation of extinguishers is independent of whether an area is equipped with a total flooding fire suppression system (NFPA 2013). Standards for handheld extinguishers aboard commercial aircraft require the unit to be able to suppress hidden fires while not causing unsuitable visual obscuration, discomfort, or toxic effects where the space is occupied (UNEP 2018b). The FAA Advisory Circular 20-42D indicates that hand fire extinguishers must meet UL standard 5B:C and UL standard 2B:C for large aircraft and small airplanes or rotorcraft, respectively (FAA 2011).

Currently, HFCs are not in use in streaming agents onboard commercial aircraft.

### 3.2. Major Manufacturers

Major manufacturers for total flooding systems for aircraft within the United States include, but are not limited to:<sup>10</sup>

- BFPE International
- **FFE**
- Fike Corporation
- FireBoy-Xintex
- Firetrace International
- Meggitt
- Minimax
- **UTC (Kidde)**

Leading manufacturers of portable fire extinguishers for aircraft in the United States include, but are not limited to:

- BFPE International
- FireBoy-Xintex
- Gielle
- H3R Aviation, Inc.
- PyroChem
- TYCO (Ansul)
- UTC (Kidde)

## 4. Subsector Background and HFC Use

### 4.1. Fire Suppressants in Airplanes and Rotorcraft

Halons have a combination of characteristics including being electrically non-conductive, dissipating rapidly without residue (i.e., clean), efficiently extinguishing most types of fires, and low toxicity. While other sectors of use, including the military, have successfully adopted alternatives to halons, the efficiency of these agents has made finding alternatives for aviation, in response to the global halon phaseout, particularly difficult due to strict standards including weight restrictions aboard aircraft (Boeing 2020b, ICAO 2016, ICAO 2019a). ICAO Standards and Recommended Practices (SARPs) currently recommend the phase-out of halons in aircraft produced on or after December 31, 2011 for lavatory fire suppression systems and December 31, 2018 for hand-held fire extinguishers (ICAO 2021). ICAO SARPs also recommend the use of an alternative in engine nacelle and APU systems or cargo compartment systems for any aircraft for which a type certificate<sup>11</sup> application will be submitted on or after December 31, 2014 or November 28, 2024, respectively (ICAO 2021).

For an alternative to be approved for use in U.S. commercial aviation applications, it must be first approved for use by EPA's Significant New Alternatives Policy (SNAP) program and must then be approved by the FAA. In order to be approved by the FAA for use, a substitute must meet industry standards by being approved by either Underwriter's Laboratory, Factory Mutual Research Corporation, or the U.S. Coast Guard (FAA 2011).

---

<sup>10</sup> Manufacturers in bold manufacture HFC lavatory trash receptacle fire suppression systems.

<sup>11</sup> A type certificate designates that a general aircraft design meets design and safety requirements. The aircraft design must then also gain a certificate of airworthiness which designates a specific aircraft meets all additional requirements (ICAO 2019b).



Halon alternatives include hydrochlorofluorocarbons (HCFCs), HFCs, and some not-in-kind (NIK) extinguishing agents. HFCs are considered to be clean fire suppressants and offer many of the same benefits as halons (e.g., fire suppression efficiency and lack of impact on equipment). In 2020, HFCs represent approximately 15% of the total halon alternative market in the United States, with CO<sub>2</sub> and inert gases accounting for most of the remainder, although HCFCs, perfluorocarbons (PFCs), fluoroketones (FKs), and iodinated fluorocarbons are also in use (EPA 2020). HFCs are estimated to represent only 0.05% of the total halon alternative market for onboard commercial aircraft in the United States, primarily HFC-227ea and HFC-236fa (ICAO 2016, ICAO 2019a).

Commercial-derivative aircraft may have a combination of civil and military requirements and the aircraft layout, floor plans, and occupied areas must be analyzed to determine which regulations apply (FAA 2010). Because of the mixed applications it is possible that, in addition to HFC-227ea and HFC-236fa in commercial aircrafts, commercial-derivative aircraft use HFC-125, which is used in total flooding systems for engine nacelles and APU in rotorcraft (Boeing 2020b).<sup>12</sup> In addition, Boeing indicates that HFC-227ea is used in commercial-derivative aircrafts (Boeing 2020b).

#### 4.1.1. Flooding Agents in Airplanes and Rotorcraft

In addition to continued use of halon 1301, the current market for total flooding systems also includes an HCFC, HFCs, and some NIK extinguishing agents (e.g., powdered aerosols, foams, water).

2-BTP, a non-HFC clean agent, was also approved by EPA's SNAP program for use in engine nacelles/APUs in 2016 and to date has not yet been widely adopted in commercial aircraft (ICAO 2016, ICAO 2019a, UNEP 2018b). Alternatives for cargo compartments have been particularly difficult to develop due to requirements to suppress Class A and Class B fires and sufficient ability to continue to provide fire suppression for the duration of the flight (UNEP 2018b), with halons still being the main agent in use in new aircraft (ICAO 2016, ICAO 2019a).

In 2011, Boeing and Airbus began using HFC-227ea and HFC-236fa, respectively, in their lavatory trash receptacle systems. Regional aircraft manufacturers followed shortly after, installing HFC systems in new aircraft as of January 2013 (ICAO 2016). Although HFC-236fa and HFC-227ea have increased space and weight characteristics compared to halon systems, these issues are less of a concern for lavatory trash receptables due to their small size and charge size. The weight of the agent is estimated to be much smaller than that of the bottle itself and, thus, the slight increase necessary to accommodate for HFCs has minimal impact on the overall weight of the system (Jensen Hughes, Inc. 2021a). Table 4 summarizes the

---

<sup>12</sup> Military rotorcrafts have successfully used HFC-125 for engine fire protection and APUs (UNEP 2018a).

environmental characteristics, including ODP and GWP, for total flooding agents approved for use in aircraft.

**Table 4. Environmental Characteristics of Total Flooding Agents Approved for Use Onboard Aircraft**

Total Flooding Agent	Trade Name	Chemical Manufacturer	ODP <sup>a</sup>	GWP
Halon 1301 <sup>b</sup>	Freon FE	DuPont and Great Lakes Chemical	10	7,140
HFC-227ea	FM-200	Chemours <sup>c</sup>	0	3,220
HFC-236fa	FE-36	Chemours <sup>c</sup>	0	9,810
HFC-125 <sup>d</sup>	FE-25	Chemours <sup>c</sup>	0	3,500

Note: GWPs are aligned with the exchange values used in the American Innovation Manufacturing (AIM) Act of 2020.

<sup>a</sup> Ozone Secretariat (1987).

<sup>b</sup> The production of Halon 1301 and Halon 2402 was banned in the United States in 1994 in compliance with the Montreal Protocol. Ongoing halon use is limited to recycled halon.

<sup>c</sup> Chemours was formerly a combination of DuPont and the fire suppressant division of Great Lakes Chemical.

<sup>d</sup> It is possible that HFC-125 may be used in commercial-derivative aircrafts.

#### 4.1.2. Streaming Agents in Aircraft

In addition to continued use of halon 1211, the current market for streaming applications also includes HCFCs, HFCs, and other agents (e.g., dry chemical, CO<sub>2</sub>, water) (UNEP 2018b, ICAO 2016, ICAO 2019a). HCFC blends (e.g., Halotron I) and HFCs (largely HFC-236fa) replaced halon 1211 in various streaming agent applications following the production and import ban of halons in 1994 (UNEP 2014, UNEP 2018b). HFC-236fa and HFC-227ea have both been listed as an acceptable replacement for halon 1211 by EPA’s SNAP program and approved for use by the FAA onboard aircraft. Airframe manufacturers chose not to pursue these substitutes for use in streaming agent applications due to the perceived space and weight characteristics paired with the concurrent ongoing development of an agent without these limitations (FAA 2013, ICAO 2016, ICAO 2019a, UNEP 2018b). Since the approval and commercialization of 2-BTP the industry has, instead, turned to the use of 2-BTP as it is the closest direct replacement based on size and weight (ICAO 2019a).

Dry chemical, dry powder, and CO<sub>2</sub> handheld extinguishers have also been considered for replacement of halon 1211 for general streaming applications; however, according to FAA, these alternatives should not be used in aircraft due to corrosive and toxicological properties (FAA 2013). Table 5 summarizes the environmental characteristics, including ODP and GWP, for streaming agents approved for use in aircraft.

**Table 5. Environmental Characteristics of Streaming Agents Approved by FAA for Handheld Fire Extinguishers for Use Onboard Aircraft**

Streaming Agent	Trade Name	Chemical Manufacturer	ODP <sup>a</sup>	GWP
Halon 1211 <sup>b</sup>	FREON™ 12B1	DuPont	3	1,890
HCFC Blend B <sup>c, d</sup>	Halotron I	American Pacific	0.01	222

Streaming Agent	Trade Name	Chemical Manufacturer	ODP <sup>a</sup>	GWP
HFC-236fa	FE-36	Chemours <sup>e</sup>	0	9,810
HFC-227ea	FM-200	Chemours <sup>e</sup>	0	3,220
2-bromo-3,3,3-trifluoropropene	2-BTP	American Pacific	0.0028	0.23-0.26

Note: GWPs are aligned with the exchange values used in the AIM act.

<sup>a</sup> Ozone Secretariat (1987).<sup>1</sup>

<sup>b</sup> The production of halon 1211 was banned in the United States in 1994 in compliance with the *Montreal Protocol*.

<sup>c</sup> HCFC Blend B contains greater than 93% HCFC-123 and less than 7% proprietary gas mixture (AMPAC 2016a).

<sup>d</sup> HCFCs are scheduled for phaseout under the Montreal Protocol. Starting in 2015, production and import of HCFCs (except in portable fire extinguishers for non-residential use and refrigeration and air conditioning equipment) are not allowed.

<sup>e</sup> Chemours was formerly a combination of DuPont and the fire suppressant division of Great Lakes Chemical.

#### 4.2. Current and Projected Use of HFCs in the Commercial Aviation Fire Suppression Subsector

As mentioned in Section 3.1 above, HFC use in commercial aviation fire suppression applications are limited primarily to lavatory trash receptacle systems. Lavatory trash receptacle fire suppression systems are estimated to make up less than 0.5% of the total installed fire suppression base on aircraft (UNEP 2018b). Lavatory trash receptacle fire suppression systems are hermetically sealed, expected to have negligible leak rates, and contain approximately 0.1 kilograms of HFC-227ea or HFC-236fa per system (Jensen Hughes, Inc. 2020). Lavatory systems must be punctured to remove agent and, thus, are not serviceable. At the end of the equipment lifetime, the lavatory system bottle is removed from the system and shipped to the manufacturer for replacement (Jensen Hughes, Inc 2020, Jensen Hughes, Inc. 2021b). HFCs from lavatory systems are removed and stored but are not currently used to fill new lavatory fire suppression systems. The average lifetime of lavatory fire suppression systems is ten years, whereas the average lifetime of commercial aircraft is 25 to 30 years (Jensen Hughes, Inc. 2021b). Therefore, it is assumed that each aircraft lavatory would use three lavatory fire suppression system bottles over the lifetime of the aircraft.

It is estimated that HFC use in 2020 in U.S. commercial aircraft lavatory trash receptacle systems is approximately 0.68 MT (0.38 MT HFC-227ea and 0.30 MT HFC-236fa). HFC estimates for the United States were developed based on fleet and delivery (i.e., sales) estimates from Boeing (2000, 2010, 2017, 2020a) and Airbus (2000, 2009, 2017, 2019). In 2014, ICF received feedback from Airbus and Boeing representatives which allowed estimates for these two manufacturers' portion of the fleet to be refined. ICF then assumed that the remaining portion of the 2014 fleet consisted of various regional aircraft. These assumptions were used as a proxy for other fleet years.

For the purposes of this analysis, it was assumed new commercial aircraft from Boeing and Airbus employed HFC-227ea and HFC-236fa, respectively, in lavatory trash receptacle systems

beginning in 2005 and 2011, respectively (ICAO 2016, ICAO 2019a). Furthermore, regional aircraft began installing HFC systems in new aircraft as of 2013 (ICAO 2016). Because the specific HFC in use in regional aircraft was not identified, it was assumed that 50% of regional aircraft employed HFC-227ea and 50% employed HFC-236fa. Additionally, it was assumed that, by 2020,<sup>13</sup> all existing commercial aircraft had converted their halon lavatory systems to HFC systems. Delivery information from Boeing and Airbus was incorporated as totals across four time periods: 1999 to 2019, 2009 to 2029, 2016 to 2036, and 2019 to 2039, and it was assumed that annual deliveries were constant in each of these ranges. As noted above, it was also assumed that every 10 years, the lavatory trash receptacle system is replaced with a new system in existing commercial aircraft.<sup>14</sup> Table 6, Figure 1, and Figure 2 show the historic use of new HFC-227ea and HFC-236fa used in commercial aviation lavatory system fire suppression applications in the United States from 2015 to 2020.

**Table 6. Historic HFC Use in Commercial Airplane Fire Suppression Applications, Including Commercial-Derivative Aircraft, in the United States (2015-2020)<sup>a,b</sup>**

	2015	2016	2017	2018	2019	2020
<b>HFC Use in Commercial Aviation Fire Suppression Applications (MT)</b>						
HFC-227ea	0.43	0.45	0.45	0.45	0.46	0.38
HFC-236fa	0.37	0.39	0.39	0.39	0.39	0.30
Total HFC	0.80	0.84	0.84	0.84	0.85	0.68
<b>HFC Use in Commercial Aviation Fire Suppression Applications (MMT CO<sub>2</sub> Eq.)</b>						
HFC-227ea	0.001	0.002	0.002	0.002	0.002	0.001
HFC-236fa	0.004	0.004	0.004	0.004	0.004	0.003
Total HFC	0.005	0.005	0.005	0.005	0.005	0.004

Note: Totals may not sum due to independent rounding.


<sup>a</sup> This analysis does not include estimates of HFC use in rotorcraft because of the small number of rotorcrafts estimated (see Table 1).

<sup>b</sup> This analysis assumes that potential HFC-125 use will be negligible.

<sup>13</sup> Based on expert opinion, all commercial aviation lavatory receptacle fire suppression systems have been converted to HFCs as of 2020. The completion of this conversion is not precisely known, however, and may have occurred earlier than 2020 (Jensen Hughes, Inc. 2021).

<sup>14</sup> Aircraft lavatory systems which were transitioned from halon to HFCs were assumed to require two lavatory system bottles for the remaining lifetime of the aircraft.

**Figure 1. Historic HFC Use in Commercial Aviation Fire Suppression Applications, Including Commercial-Derivative Aircraft, in the United States (2015-2020) (MT)**

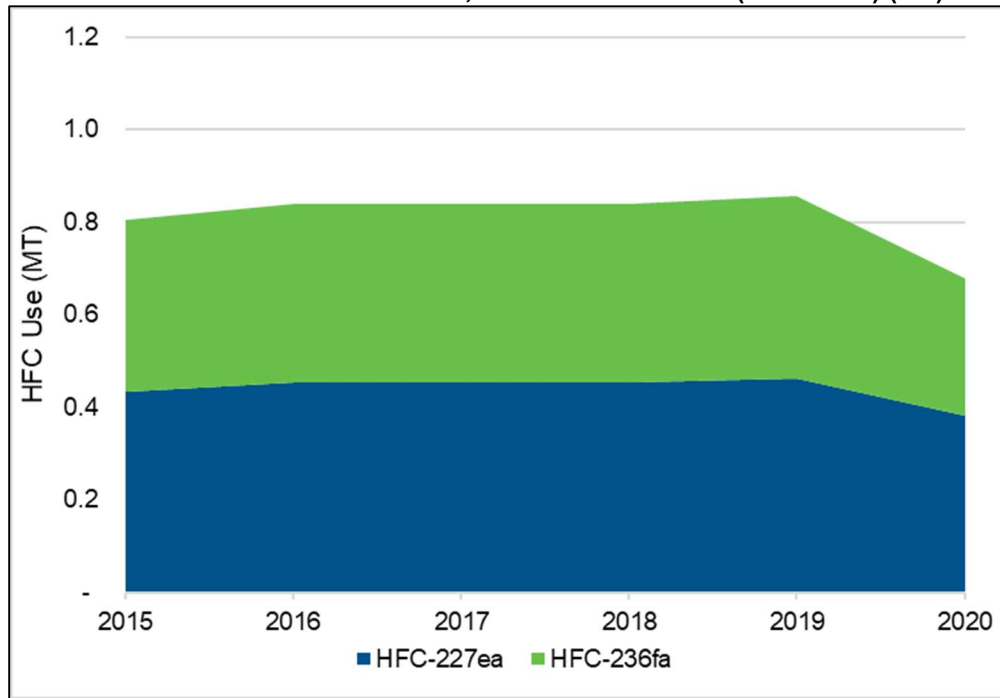

**Figure 2. Historic HFC Use in Commercial Aviation Fire Suppression Applications, Including Commercial-Derivative Aircraft, in the United States (2015-2020) (Million Metric Tons CO<sub>2</sub> Equivalent (MMT CO<sub>2</sub> Eq.))**

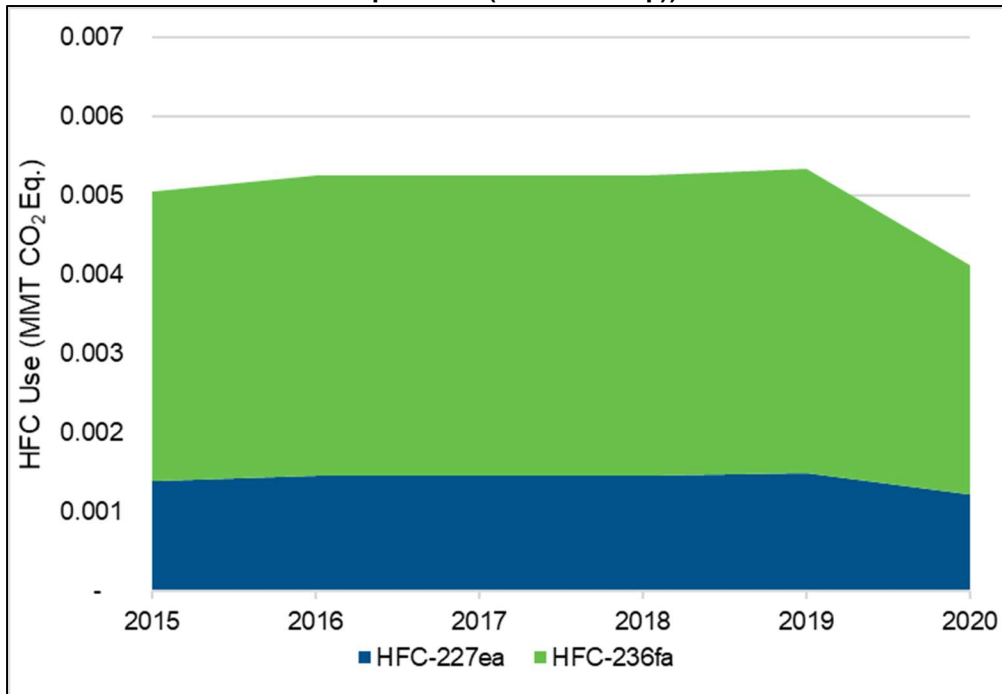



Figure 3 shows the projected use of HFCs in the total fire suppression market in the United States, and Table 7, Figure 4, and Figure 5 show the projected use of new HFC-227ea and

HFC-236fa in onboard commercial aviation fire suppression uses from 2020 to 2025. Estimates were developed assuming new commercial aircraft continued to use HFC-227ea and HFC-236fa in lavatory trash receptacle systems. HFCs were not assumed to be in use in any other commercial aviation fire suppression applications.

Projections of aircraft fleet and deliveries were adjusted to reflect preliminary observed changes in response to the COVID-19 pandemic. Aerospace Markets (2020) indicated there have been decreases in global aircraft fleet and deliveries in 2020, including an increase in early retirements of aircraft, particularly twin aisles. Global aircraft deliveries in 2020 have decreased by 33.1%, with full recovery not expected until after 2024 due to the COVID-19 pandemic. Full impacts for the United States are not yet known and may continue to fluctuate.

In 2020, the HFC use in the commercial aviation market, including commercial-derivative aircraft, makes up 0.68 MT (0.38 MT HFC-227ea and 0.30 MT HFC-236fa) or 0.009% of the total fire suppression market and 0.0004% of total HFC use in the United States. Following the recovery of the commercial aviation market from impacts due to the COVID-19 pandemic (i.e., 2025), HFC use in the commercial aviation market is estimated to stabilize at 1.08 MT (0.67 MT HFC-227ea and 0.46 MT HFC-236fa) or 0.013% of the total fire suppression market and 0.0007% of total HFC use in the United States.

**Figure 3. Projected HFC Use in Fire Suppression Applications in the United States (2020-2025) (MT)**

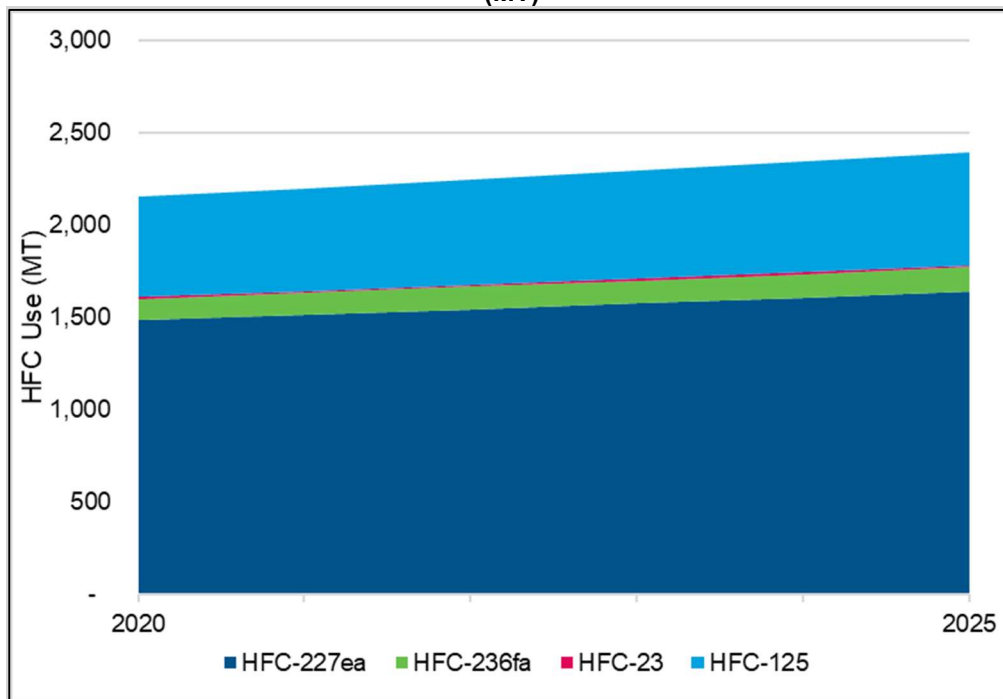

**Table 7. Projected HFC Use in Commercial Aviation Fire Suppression Applications, Including Commercial-Derivative Aircraft, in the United States (2020-2025)**


	2020	2021	2022	2023	2024	2025
<b>HFC Use in Commercial Aviation Fire Suppression Applications (MT)</b>						
HFC-227ea	0.38	0.60	0.61	0.64	0.65	0.67
HFC-236fa	0.30	0.31	0.32	0.34	0.35	0.46
Total HFC	0.68	0.90	0.93	0.97	1.00	1.13
<b>HFC Use in Commercial Aviation Fire Suppression Applications (MMT CO<sub>2</sub> Eq.)</b>						
HFC-227ea	0.001	0.002	0.002	0.002	0.002	0.002
HFC-236fa	0.003	0.003	0.003	0.003	0.003	0.005
Total HFC	0.004	0.005	0.005	0.005	0.006	0.007

Note: Totals may not sum due to independent rounding.


<sup>a</sup> This analysis does not include estimates of HFC use in rotorcraft because of the small number of rotorcrafts estimated (see Table 1).

<sup>b</sup> This analysis assumes that potential HFC-125 use will be negligible

**Figure 4. Projected HFC Use in Commercial Aviation Fire Suppression Applications, Including Commercial-Derivative Aircraft, in the United States (2020-2025) (MT)**

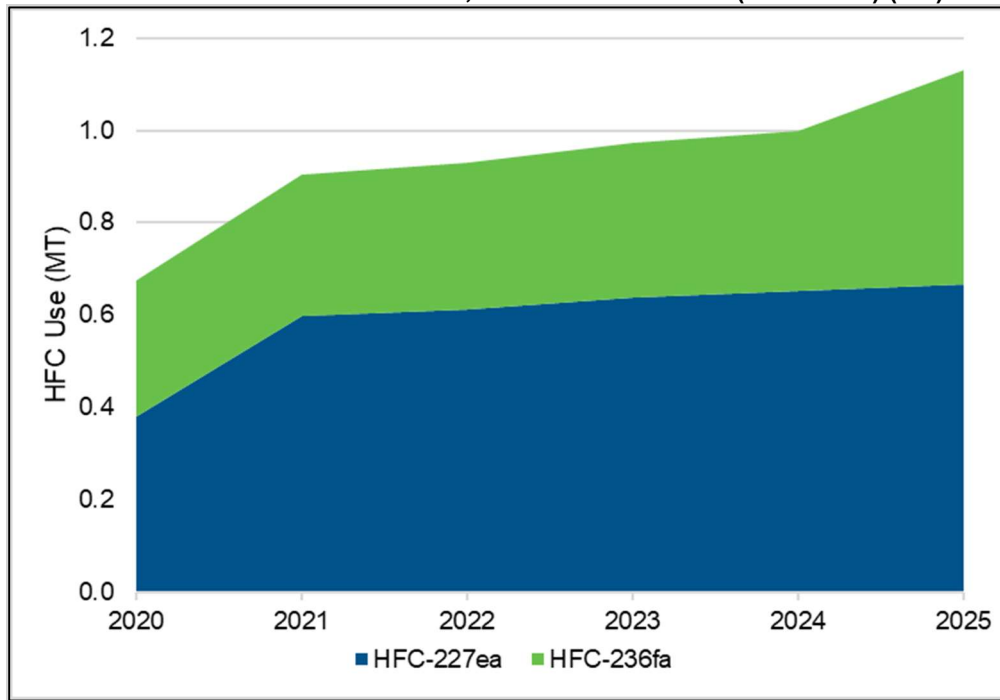

**Figure 5. Projected HFC Use in Commercial Aviation Fire Suppression Applications, Including Commercial-Derivative Aircraft, in the United States (2020-2025) (MMT CO<sub>2</sub> Eq.)**

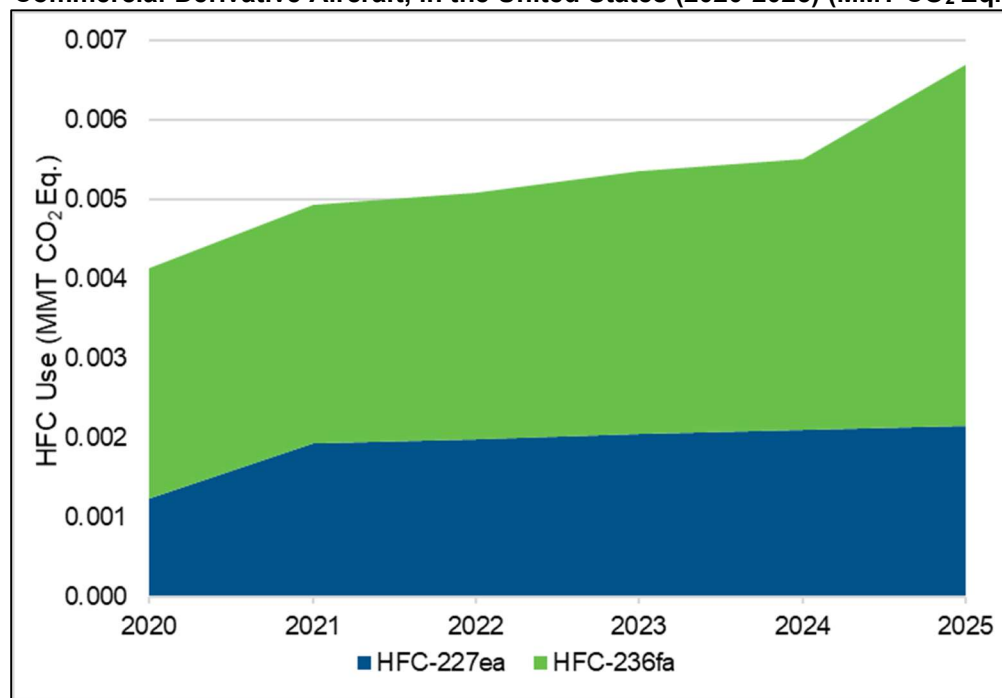

As additional alternatives are identified and tested for engine nacelle, APU, and cargo compartment use, use of HFCs could increase (ICAO 2016, ICAO 2019a). For example, industry notes that HFC-125 may be used for engine nacelle and APU fire suppression if another alternative is not identified (Boeing 2021a, Collins 2021). HFC use in lavatory systems could decrease as alternatives become available; however, there are no known alternatives for lavatory systems currently in development. Future HFC use in commercial aviation applications would vary based on actual annual aircraft growth rates, which could vary due to unexpected events (e.g., COVID-19 pandemic). Additionally, reclaimed HFC use in this sector could be considered in the future.

#### 4.3. Imports and Exports of Commercial Aviation Fire Suppression Systems in the United States

HFC-227ea and HFC-236fa are produced in the United States; however, HFC-236fa lavatory fire suppression systems are exclusively manufactured by FFE Ltd., a UK-based company (Jensen Hughes, Inc. 2021). Therefore, it is assumed that HFC-236fa lavatory systems are imported pre-charged for use in Airbus and regional aircraft. HFC-227ea lavatory fire suppression systems are assumed to be manufactured in the United States.



## 5. References

- Airbus. 2021a. Airbus Annual Report 2020. February 17, 2021. Available online at: [https://annualreport.airbus.com/pdf/Full%20Report\\_Airbus\\_SE\\_Annual\\_Report\\_2020.pdf](https://annualreport.airbus.com/pdf/Full%20Report_Airbus_SE_Annual_Report_2020.pdf).
- Airbus. 2021b. Helicopters FY 2020 Annual Results. Available online at: <https://www.airbus.com/helicopters/key-figures.html>.
- Airbus. 2019. *Global Market Forecast: Growing Horizons 2019 – 2038*. 2019. Available online at: <https://www.airbus.com/aircraft/market/global-market-forecast.html>.
- Airbus. 2017. *Global Market Forecast: Growing Horizons 2017 – 2036*. 2017. Available online at: <http://www.airbus.com/aircraft/market/global-market-forecast.html>.
- Airbus. 2009. *Global Market Forecast: Growing Horizons 2009 – 2028*. 2009.
- Airbus. 2000. *Global Market Forecast: Growing Horizons 2000 – 2019*. 2000. Available online at: [http://www.as777.com/data/manufacture/forecast/airbus\\_2000.pdf](http://www.as777.com/data/manufacture/forecast/airbus_2000.pdf).
- Aerospace Markets. 2020. *Aerospace Markets in 2021: Up, Down, or Flat?* Webinar. October 21, 2020.
- American Pacific (AMPAC). 2016a. Halotron™ I Safety Data Sheet (SDS). Available online at: [http://www.halotron.com/pdf/Halotron1\\_SDS.pdf](http://www.halotron.com/pdf/Halotron1_SDS.pdf).
- Boeing. 2021a. Response to Notice of Data Availability Relevant to the United States Hydrofluorocarbon Baselines and Mandatory Allocations. April 13, 2021.
- Boeing. 2021b. Comments on Proposed Rule: Phasedown of Hydrofluorocarbons: Establishing the Allowance Allocation and Trading Program Under the American Innovation and Manufacturing Act (AIM). July 6, 2021. Available online at: <https://www.regulations.gov/comment/EPA-HQ-OAR-2021-0044-0117>.
- Boeing. 2020a. *Current Market Outlook 2020 – 2039*. October 2020. Available online at: <http://www.boeing.com/commercial/market/commercial-market-outlook/>.
- Boeing. 2020b. Letter to the Senate Committee on Environment and Public Works. Received by Chairman Barrasso. March 13, 2020. Available online at: [https://www.epw.senate.gov/public/\\_cache/files/d/1/d152a591-878f-4a4d-b9c1-dc7121c06eca/9D366FF1E61F7EFFD6A71C37C92924A5.04.03.2020-boeing.pdf](https://www.epw.senate.gov/public/_cache/files/d/1/d152a591-878f-4a4d-b9c1-dc7121c06eca/9D366FF1E61F7EFFD6A71C37C92924A5.04.03.2020-boeing.pdf).
- Boeing. 2017. *Current Market Outlook 2017 – 2036*. September 2017. Available online at: <http://www.boeing.com/commercial/market/current-market-outlook-2017/>.
- Boeing. 2010. *Current Market Outlook 2010 – 2029*. September 2010.
- Boeing. 2000. *Current Market Outlook 2000 – 2019*. September 2000. Available online at: [http://www.as777.com/data/manufacture/forecast/boeing\\_2000.pdf](http://www.as777.com/data/manufacture/forecast/boeing_2000.pdf).
- Collins Aerospace. 2021. Comment on Notice of Data Availability Relevant to the United States Hydrofluorocarbon Baselines and Mandatory Allocations. Available online at: <https://www.regulations.gov/comment/EPA-HQ-OAR-2021-0044-0030>
- Federal Aviation Administration (FAA). 2020. Lavatory Fire Extinguisher Test Standard. 2020. Available online at: <https://www.fire.tc.faa.gov/Systems/LAVEX/MPS>.

Federal Aviation Administration (FAA). 2013. Halon Replacement Aviation Rulemaking Committee. July 2, 2013. Available online at: [https://www.faa.gov/regulations\\_policies/rulemaking/committees/documents/media/HRARC-7022013.pdf](https://www.faa.gov/regulations_policies/rulemaking/committees/documents/media/HRARC-7022013.pdf).

Federal Aviation Administration (FAA). 2012. Minimum Performance Standard for Aircraft Cargo Compartment Halon Replacement Fire Suppression Systems (2012 Update). May 2012. Available online at: <https://www.fire.tc.faa.gov/pdf/TC-TN12-11.pdf>.

Federal Aviation Administration (FAA). 2011. Advisory Circular 20-42D. January 14, 2011. Available online at: [https://www.faa.gov/documentLibrary/media/Advisory\\_Circular/AC\\_20-42D.pdf](https://www.faa.gov/documentLibrary/media/Advisory_Circular/AC_20-42D.pdf).

Federal Aviation Administration (FAA). 2010. Advisory Circular 20-169. September 30, 2010. Available online at: [https://www.faa.gov/documentLibrary/media/Advisory\\_Circular/AC\\_20-169.pdf](https://www.faa.gov/documentLibrary/media/Advisory_Circular/AC_20-169.pdf).

Federal Aviation Administration (FAA). 2002. Development of a Minimum Performance Standard for Hand-Held Fire Extinguishers as a Replacement for Halon 1211 on Civilian Transport Category Aircraft. August 2002. Available online at: <https://www.fire.tc.faa.gov/pdf/01-37.pdf>.

Federal Aviation Administration (FAA). 1997. Development of a Minimum Performance Standard for Lavatory Trash Receptacle Automatic Fire Extinguishers. February 1997. Available online at: <http://www.tc.faa.gov/its/worldpac/techrpt/ar96-122.pdf>.

Fire Equipment Manufacturers' Association (FEMA). 2015. Portable Fire Extinguishers. Available online at: <http://femalifesafety.org/about.html>.

FlyingMag. 2018. How an Auxiliary Power Unit Works. March 10, 2018. Available online at: <https://www.flyingmag.com/how-an-auxiliary-power-unit-works/>.

International Civil Aviation Organization (ICAO). 2019a. Halon Replacement – Challenges and Solutions. Available online at: [https://www.icao.int/Meetings/a40/Documents/WP/wp\\_093\\_en.pdf](https://www.icao.int/Meetings/a40/Documents/WP/wp_093_en.pdf).

International Civil Aviation Organization (ICAO). 2019b. Aircraft Certification – Including Modification. Available online at: <https://www.icao.int/MID/Documents/2019/ACAO-ICAO%20Airworthiness/Session%205%20Part%2021%20%20Aircraft%20Certification%20final.pdf>.

International Civil Aviation Organization (ICAO). 2016. Update on the Development Of Halon Alternatives for Fire Suppression Systems. Available online at: [https://www.icao.int/Meetings/a39/Documents/UPDATE\\_ON\\_THE\\_DEVELOPMENT\\_OF\\_HALON\\_ALTERNATIVES\\_FOR\\_FIRE\\_SUPPRESSION\\_SYSTEMS.pdf#search=halon%20alternatives%20for%20fire](https://www.icao.int/Meetings/a39/Documents/UPDATE_ON_THE_DEVELOPMENT_OF_HALON_ALTERNATIVES_FOR_FIRE_SUPPRESSION_SYSTEMS.pdf#search=halon%20alternatives%20for%20fire).

International Civil Aviation Organization (ICAO). 2013. Update on the Development of Halon Alternatives for Fire Suppression Systems. Available online at: [https://www.icao.int/Meetings/a39/Documents/UPDATE\\_ON\\_THE\\_DEVELOPMENT\\_OF\\_HALON\\_ALTERNATIVES\\_FOR\\_FIRE\\_SUPPRESSION\\_SYSTEMS.pdf](https://www.icao.int/Meetings/a39/Documents/UPDATE_ON_THE_DEVELOPMENT_OF_HALON_ALTERNATIVES_FOR_FIRE_SUPPRESSION_SYSTEMS.pdf).

International Civil Aviation Organization (ICAO). 2021. Halon Replacement as Fire Suppression/Extinguishing Agent on Aircraft. Accessed August 2021. Available online at: <https://www.icao.int/safety/OPS/OPS-Section/Pages/Halon-Replacement.aspx>.

Jensen Hughes, Inc. 2021b. Personal communication with Dan Verdonik of Jensen Hughes, Inc. January 15, 2021.

Jensen Hughes, Inc. 2021a. Personal communication with Dan Verdonik of Jensen Hughes, Inc. January 15, 2021.

Jensen Hughes, Inc. 2020. Personal communication with Dan Verdonik of Jensen Hughes, Inc. December 17, 2020.

Jensen Hughes, Inc. 2015. Personal communication with Dan Verdonik of Jensen Hughes, Inc. August 11, 2015.

Leonardo. Half-Year Financial Report. June 30, 2021. Available online at: <https://www.leonardocompany.com/documents/20142/0/Half-year+financial+report+at+30+June+2021+with+opinion.pdf/d6bcef3c-01e8-32bc-d1cc-fd28d0ede07d?t=1627655284059>.

National Aeronautics and Space Administration (NASA). 2018. State of the Art Small Spacecraft Technology. Available Online at: [https://www.nasa.gov/sites/default/files/atoms/files/soa2018\\_final\\_doc.pdf](https://www.nasa.gov/sites/default/files/atoms/files/soa2018_final_doc.pdf)

National Fire Protection Association (NFPA). 2021. NFPA 53: Recommended Practice on Materials, Equipment, and Systems Used in Oxygen-Enriched Atmospheres.

National Fire Protection Association (NFPA). 2017. NFPA 408: Standard for Aircraft Hand Portable Fire Extinguishers.

National Fire Protection Association (NFPA). 2013. NFPA 10: Standard for Portable Fire Extinguishers.

Ozone Secretariat. 1987. The Montreal Protocol on Substances that Deplete the Ozone Layer. United National Environment Programme (UNEP). Available Online at: <https://ozone.unep.org/treaties/montreal-protocol>.

Raytheon. 2021. Raytheon Intell & Space HFC Uses Bradford Presentation. March 16, 2021.

Robin, L. Mark. 2011. A Short History of Clean Fire Suppression Agents. Fire Detection and Suppression. FS-World.com Fire and Safety Magazine. Spring 2011 Edition. Available online at: [https://www.chemours.com/FE/en\\_US/assets/downloads/pdf/Chemours\\_Reprint\\_FSWorld\\_Spring2011.pdf](https://www.chemours.com/FE/en_US/assets/downloads/pdf/Chemours_Reprint_FSWorld_Spring2011.pdf).

United Nations Environment Programme (UNEP). 2018a. Report of the Halons Technical Options Committee. December 2018. 2018 Supplementary Report: Civil Aviation. Available online at: [https://ozone.unep.org/sites/default/files/assessment\\_panels/HTOC\\_assessment\\_2018.pdf](https://ozone.unep.org/sites/default/files/assessment_panels/HTOC_assessment_2018.pdf).

United Nations Environment Programme (UNEP). 2018b. Report of the Halons Technical Options Committee. December 2018. 2018 Assessment Report: Volume 1. Available online at: [https://ozone.unep.org/sites/default/files/2019-04/HTOC\\_supplement\\_report1\\_2018.pdf](https://ozone.unep.org/sites/default/files/2019-04/HTOC_supplement_report1_2018.pdf).

United Nations Environment Programme (UNEP). 2014. Report of the Halons Technical Options Committee. December 2014. Fire Protection Alternatives to Halons. Technical Note #1 – Revision 4. Available online at: [http://ozone.unep.org/Assessment\\_Panels/TEAP/Reports/HTOC/Technical%20Note%201-%20Revision%204%20-%20Fire%20Protection%20Alternatives%20To%20Halon%20-%202014.pdf](http://ozone.unep.org/Assessment_Panels/TEAP/Reports/HTOC/Technical%20Note%201-%20Revision%204%20-%20Fire%20Protection%20Alternatives%20To%20Halon%20-%202014.pdf).

U.S. Environmental Protection Agency (EPA). 2020. EPA Vintaging Model. VM IO  
file\_V5.2\_10.08.20.xlsx.