



GE  
159 Plastics Avenue  
Pittsfield, MA 01201  
USA

*Transmitted Via Overnight Delivery*

December 13, 2006

Dean Tagliaferro  
U.S. Environmental Protection Agency  
c/o Weston Solutions  
10 Lyman Street  
Pittsfield, MA 01201

**Re: GE-Pittsfield/Housatonic River Site  
Floodplain Residential and Non-Residential Properties Adjacent to 1½ Mile Reach of  
Housatonic River (GECD710 and GECD720)  
Supplemental Soil Evaluation Report and Removal Design/Removal Action Work Plan  
Addendum for Selected Phase 2 Floodplain Properties**

Dear Mr. Tagliaferro:

In January 2004, General Electric (GE) submitted to EPA a document titled *Pre-Design Investigation/Soil Evaluation Report and Conceptual Removal Design/Removal Action Work Plan for Phase 2 Floodplain Properties Adjacent to the 1½ Mile Reach of Housatonic River* (Phase 2 Investigation/Evaluation Report). That report presented a review and evaluation of the soil sampling data from the properties within Phase 2 of the 1½ Mile Floodplain Properties, and concluded that no remediation was necessary at those properties to meet the applicable Performance Standards under the Consent Decree. EPA approved that report in a letter to GE dated March 9, 2004.

During the course of preparing a Final Completion Report for the Phase 2 floodplain properties, GE identified the need for revised evaluations for three Phase 2 properties – Parcels I8-4-201/202, Parcels I8-4-2, -3, -4, and the non-bank portion of Parcel I8-4-7. The need for these revised evaluations was due to: (a) revised information on the location of the property boundary between these properties; and (b) the identification of certain PCB sample results which, although presented in the Phase 2 Investigation/Evaluation Report, were inadvertently not considered in that report in the evaluation of exceedances of the applicable “not-to-exceed” level for Parcels I8-4-201/202 and I8-4-2, -3, -4. The enclosed *Supplemental Soil Evaluation Report and Removal Design/Removal Action Work Plan Addendum for Selected Phase 2 Floodplain Properties Adjacent to the 1½ Mile Reach of Housatonic River* (Phase 2 RD/RA Work Plan Addendum) describes this information and presents revised evaluations to assess the need for remediation at these properties.

Based on these revised evaluations, GE has identified the need for soil removal actions at two of these properties – Parcels I8-4-201/202 and I8-4-2, -3, -4. The enclosed Phase 2 RD/RA Work Plan Addendum also describes the soil remediation actions proposed for these properties and provides design and implementation information for the performance of those remediation actions. In summary, the scope of the proposed remediation will consist of limited soil removal to address PCBs in the top foot of soils at each of these properties.

Please contact me if you have any questions or comments regarding this Addendum.

Sincerely,



Richard W. Gates  
Remediation Project Manager

Enclosure

V:\GE\_Houstonic\_Mile\_and\_Half\Reports and Presentations\Phase 2 Addendum\62162196CvrLtr.doc

cc: Timothy Conway, EPA  
Rose Howell, EPA\*  
Holly Inglis, EPA  
K.C. Mitkevicius, USACE (CD-ROM)  
Linda Palmieri, Weston (CD-ROM)  
Susan Steenstrup, MDEP (2 copies)  
Anna Symington, MDEP\*  
Jane Rothchild, MDEP\*  
Nancy E. Harper, MA AG\*  
Dale Young, MA EOE\*

Mayor James Ruberto, City of Pittsfield  
Jeffrey Bernstein, Bernstein, Cushner & Kimmel  
Michael Carroll, GE\*  
Andrew Silfer, GE  
Rod McLaren, GE\*  
James Nuss, BBL  
James Bieke, Goodwin Procter  
Property Owner – Parcels I8-4-202 & -202  
Property Owner – Parcels I8-4-2 , -3, -4  
Public Information Repositories  
GE Internal Repository

*\*cover letter only*

# REPORT

---

*Supplemental Soil Evaluation Report  
and Removal Design/Removal Action  
Work Plan Addendum for Selected  
Phase 2 Floodplain Properties  
Adjacent to the 1 1/2 Mile Reach of  
Housatonic River*

**General Electric Company  
Pittsfield, Massachusetts**

**December 2006**



# Table of Contents

---

<b>Section 1. Introduction .....</b>	<b>1-1</b>
1.1 General .....	1-1
1.2 Description of Phase 2 Floodplain Properties .....	1-2
1.3 Bases for Revised Evaluations .....	1-3
1.4 Format of Document .....	1-4
<b>Section 2. Revised PCB Soil Evaluations and Proposed Removal Actions .....</b>	<b>2-1</b>
2.1 General .....	2-1
2.2 Revised Evaluation and Proposal for Parcels I8-4-201/202 .....	2-1
2.3 Revised Evaluation and Proposal for Parcels I8-4-2, -3, -4 .....	2-3
2.4 Revised Evaluation for Parcel I8-4-7 .....	2-5
2.5 Overall Summary .....	2-6
<b>Section 3. Design Information .....</b>	<b>3-1</b>
3.1 General .....	3-1
3.2 Technical Specifications .....	3-1
3.3 Soil Removal Activities .....	3-2
3.4 Backfilling Excavations .....	3-2
3.5 Flood Storage Capacity .....	3-3
3.6 Applicable or Relevant and Appropriate Requirements .....	3-3
<b>Section 4. Contractor Selection .....</b>	<b>4-1</b>
<b>Section 5. Implementation Plan .....</b>	<b>5-1</b>
5.1 General .....	5-1
5.2 Project Participants .....	5-1
5.3 Contractor Submittals .....	5-2
5.4 Site Preparation .....	5-5
5.4.1 Utility Clearances .....	5-5
5.4.2 Work Area Security .....	5-5
5.4.3 "Clean" Access Area .....	5-6
5.4.4 Survey Control .....	5-7
5.4.5 Erosion and Sedimentation Control Measures .....	5-7
5.4.6 Surface Preparation .....	5-7
5.5 Construction Activities .....	5-7
5.5.1 Soil Removal and Material Handling .....	5-7
5.5.2 Transport and Disposition of Excavated Materials and Remediation- Derived Waste .....	5-9
5.5.3 Backfilling of Excavations .....	5-10
5.5.4 Equipment Cleaning .....	5-10
5.5.5 Restoration of Disturbed Vegetation .....	5-11
5.6 Perimeter Air Monitoring .....	5-11

---

<b>Section 6. Post-Construction Activities .....</b>	<b>6-1</b>
6.1 General .....	6-1
6.2 Project Closeout – Pre-Certification Inspection and Completion Report.....	6-1
6.3 Post-Removal Site Control Activities .....	6-1
6.3.1 Periodic Inspections .....	6-1
6.3.2 Maintenance/Repair .....	6-2
6.3.3 Inspection Reporting.....	6-2
6.4 Additional Inspection Activities .....	6-3
 <b>Section 7. Schedule .....</b>	 <b>7-1</b>

**Figures**

- 1 Removal Action Area
- 2 Site Plan
- 3 Property Boundary Comparison for Parcels I8-4-2, -3, & -4, I8-4-201/202, and I8-4-7
- 4 PCB Soil Sample Locations/Results and Proposed Soil Removal – Parcels I8-4-201/202
- 5 PCB Soil Sample Locations/Results and Proposed Soil Removal – Parcels I8-4-2, -3, -4
- 6 PCB Soil Sample Locations/Results – Parcel I8-4-7

**Appendices**

- A PCB Spatial Averaging Evaluation Tables and Polygon Maps
- B Technical Drawings
- C Technical Specifications
- D Contractor Submittal Tracking Form
- E Ambient Air Monitoring Program

# 1. Introduction

---

## 1.1 General

On October 27, 2000, a Consent Decree (CD) executed in 1999 by the General Electric Company (GE), the United States Environmental Protection Agency (EPA), the Massachusetts Department of Environmental Protection (MDEP), and several other government agencies was entered by the United States District Court for the District of Massachusetts. The CD requires (among other things) the performance of Removal Actions to address polychlorinated biphenyls (PCBs) and other hazardous constituents present in soil, sediment, and groundwater at several Removal Action Areas (RAAs). Two of these RAAs encompass properties located in whole or in part within the floodplain of the Housatonic River adjacent to the 1½ Mile Reach of the River: (1) Floodplain Current Residential Properties Adjacent to the 1½ Mile Reach – Actual/Potential Lawns; and (2) Floodplain Non-Residential Properties Adjacent to the 1½ Mile Reach (Excluding Banks). These RAAs are jointly referred to as the 1½ Mile Floodplain RAAs. They were divided into the following four phases for investigation, evaluation, and remediation purposes, to allow for coordination with EPA's response actions for the river sediments and riverbank soils as part of the 1½ Mile Reach Removal Action:

Phase 1 - Lyman Street Bridge to Elm Street Bridge;

Phase 2 - Elm Street Bridge to Dawes Avenue;

Phase 3 - Dawes Avenue to Pomeroy Avenue; and

Phase 4 - Pomeroy Avenue to the Confluence.

This document relates to the floodplain properties in Phase 2 (shown on Figures 1 and 2). In January 2004, GE submitted to EPA a document titled *Pre-Design Investigation/Soil Evaluation Report and Conceptual Removal Design/Removal Action Work Plan for Phase 2 Floodplain Properties Adjacent to the 1½ Mile Reach of Housatonic River* (Phase 2 Investigation/Evaluation Report). That report (1) summarized the results of soil investigations conducted at the Phase 2 floodplain properties, (2) presented an evaluation of the available data on polychlorinated biphenyls (PCBs) in soil at those properties relative to the applicable soil-related Performance Standards established in the CD and accompanying *Statement of Work for Removal Actions Outside the River* (SOW), (3) presented an evaluation of the data on non-PCB constituents at certain of those properties, and (4) contained an overall assessment of the need for further response actions. The Phase 2 Investigation/Evaluation Report concluded that no remediation or other additional response actions were necessary at the Phase 2 floodplain properties to meet the applicable Performance Standards under the CD, and

---

it noted that GE would discuss with EPA the appropriate timing for submitting a Final Completion Report for these properties. EPA approved the Phase 2 Investigation/Evaluation Report in a letter to GE dated March 9, 2004.

During the course of preparing a Final Completion Report for the Phase 2 floodplain properties, GE identified the need for revised evaluations at three Phase 2 properties: (1) Parcels I8-4-201/202 (which together were formerly Parcel I8-4-5 and are owned by the same person [individually or as trustee] and have thus been evaluated as a single property); (2) Parcels I8-4-2, -3, -4 (which comprise one commonly owned property); and (3) the non-bank portion of Parcel I8-4-7. Further, based on those revised evaluations, GE has identified the need for soil removal actions at two of these properties – Parcels I8-4-201/202 and Parcels I8-4-2, -3, -4. This *Supplemental Soil Evaluation Report and Removal Design/Removal Action Work Plan Addendum for Selected Phase 2 Floodplain Properties Adjacent to the 1½ Mile Reach of Housatonic River* (Phase 2 RD/RA Work Plan Addendum) presents the bases for these determinations, describes the soil remediation actions proposed for Parcels I8-4-201/202 and I8-4-2, -3, -4, and provides design and implementation information for the performance of those remediation actions. In summary, the scope of the remediation will consist of limited soil removal to address PCBs in the top foot of soils at each of these properties.

## **1.2 Description of Phase 2 Floodplain Properties**

Phase 2 properties in the 1½ Mile Floodplain RAAs consist of several contiguous properties located along the north side of the Housatonic River between the Elm Street Bridge and Dawes Avenue (Figure 1). These include Parcel I8-4-6, Parcels I8-4-201/202, Parcels I8-4-2, -3, -4, Parcel I8-4-101 (formerly Parcel I8-4-1), and the non-bank portion of Parcel I8-4-7 (Figure 2). All properties within this group are considered residential except for Parcel I8-4-7, which is an undeveloped property considered to be in recreational use and is now owned by the City of Pittsfield.

Some of the properties included in Phase 2 were previously subject to response actions to address PCB-containing soils. Specifically, Parcels I8-4-2, -3, -4 and I8-4-101 were previously subject to soil removal activities as Immediate Response Actions (IRAs) under the Massachusetts Contingency Plan (MCP), and Response Action Outcome (RAO) Statements for these properties were submitted to MDEP and EPA on February 1, 1999 for Parcels I8-4-2, -3, -4 and on October 1, 1998 for Parcel I8-4-101. Activities associated with these removals were summarized in documents titled *Immediate Response Action Completion Report for Parcel I8-4-2, -3, -4* (February 1999) and *Immediate Response Action Completion Report for Parcel I8-4-1*

---

(September 1998). In addition, GE conducted a large soil removal and bank stabilization project at Parcel I8-4-7, which resulted in the removal and off-site disposal of soils generally associated with the uppermost 3 feet of that property.

### **1.3 Bases for Revised Evaluations**

In the course of preparing a Final Completion Report for the Phase 2 floodplain properties, GE identified a number of facts which warranted revised RD/RA evaluations for certain of these properties. First, GE observed that the boundary dividing Parcels I8-4-2, -3, -4 and I8-4-201/202 from Parcel I8-4-7 as depicted in the Phase 2 Investigation/Evaluation Report was different from that shown in the IRA Completion Report for Parcels I8-4-2, -3, -4. The boundary depicted in the Phase 2 Investigation/Evaluation Report was much closer to the river than shown in the IRA Completion Report. To resolve this issue, GE reviewed the information provided by Hill Engineers, Architects, Planners in January 1996 (which formed the basis for the IRA Completion Report boundary), City of Pittsfield tax assessors' maps, and information from EPA's Phase 2 database, provided by EPA's consultants at Weston Solutions. All these sources indicate that the actual boundary between these properties is very similar to that shown in the IRA Completion Report, rather than that shown in the Phase 2 Investigation/Evaluation Report. The revised boundaries of these parcels based on this information are shown on Figure 3, relative to the boundaries used in the Phase 2 Investigation/Evaluation Report. (These revised boundaries are used on Figure 2 and on all other figures in this Phase 2 RD/RA Work Plan Addendum.) Due to this change from the Phase 2 Investigation/Evaluation Report, revised RD/RA evaluations have been conducted for these properties using the revised property boundaries.

Second, in reviewing the sampling data, GE identified certain sample locations on or affecting Parcels I8-4-201/202 and I8-4-2, -3, -4 in which PCB concentrations in samples collected from the top foot of unpaved soil exceeded the applicable not-to-exceed (NTE) level of 10 parts per million (ppm) for residential properties. Although these results were presented in the Phase 2 Investigation/Evaluation Report, they were inadvertently not identified in the NTE evaluations in that report. These instances are described in more detail in Sections 2.2 and 2.3 below. Accordingly, the evaluations of these properties have been revised to take account of these NTE exceedances and to propose soil removal to address them.

---

## 1.4 Format of Document

The remainder of this document is presented in six sections. The title and a brief overview of each section are presented below:

**Section 2 – Revised PCB Soil Evaluations and Proposed Removal Actions**, presents the results of the revised PCB evaluations conducted for Parcels I8-4-201/202, Parcels I8-4-2, -3, -4, and Parcel I8-4-7 (non-bank portion) to determine the need for removal actions to achieve the applicable Performance Standards. Where necessary, the proposed removal actions to achieve the Performance Standards (i.e., soil removal/replacement) are then described and depicted on figures and technical drawings. Further, for properties where removal actions are necessary to address PCBs in soil, this section presents evaluations of post-remediation conditions to demonstrate that the proposed removal actions will achieve the applicable Performance Standards.

**Section 3 – Design Information**, describes additional design-related information associated with the removal actions identified in Section 2. Such information includes technical plans, specifications, and drawings; information regarding performance of soil removal activities; an evaluation of potential impacts to the flood storage capacity in this area; identification of site-specific Applicable or Relevant and Appropriate Requirements (ARARs); and a description of the procedures to be implemented to ensure attainment of those ARARs.

**Section 4 – Contractor Selection**, discusses the process for selecting the Remediation Contractor.

**Section 5 – Implementation Plan**, discusses certain site-specific implementation components, including identification of the project participants, Remediation Contractor submittal requirements, project-specific site preparation and construction-related components, and the perimeter air monitoring activities proposed during the performance of the removal actions.

**Section 6 – Post-Construction Activities**, identifies the various activities to be performed following implementation of the removal actions, including project close-out activities (e.g., pre-certification inspection and preparation of a Final Completion Report) and Post-Removal Site Control activities.

**Section 7 – Schedule**, identifies the anticipated schedule for performance of the proposed remedial actions and the subsequent reporting activities.

---

The discussions in the sections listed above are supported by various figures and appendices included in this document.

## ***2. Revised PCB Soil Evaluations and Proposed Removal Actions***

---

### **2.1 General**

This section presents the results of the revised PCB evaluations that were performed for Parcels I8-4-201/202, I8-4-2, -3, -4, and I8-4-7 taking into account: (1) the revised property boundary dividing Parcels I8-4-201/202 and I8-4-2, -3, -4 from Parcel I8-4-7; and (2) the identification of certain sample locations on or affecting Parcels I8-4-201/202 and I8-4-2, -3, -4 where PCB concentrations in the top foot exceeded the NTE level of 10 ppm for residential properties. These revised evaluations were developed using the same PCB evaluation procedures and Performance Standards previously summarized in the Phase 2 Investigation/Evaluation Report. As further described below, these revised evaluations have resulted in the identification of the need for soil removal/replacement actions at Parcels I8-4-201/202 and I8-4-2, -3, -4, but no need for additional soil removal at Parcel I8-4-7. In addition, after review of the evaluations presented in the Phase 2 Investigation/Evaluation Report and available site sampling data and mapping, GE has determined that evaluations associated with the remaining two parcels within the Phase 2 floodplain properties (Parcels I8-4-6 and I8-4-101) do not require revisions; those properties are therefore not discussed further in this document.

In support of the revised evaluations presented in this section, GE has prepared backup documentation. Specifically, spatial averaging tables and Thiessen polygon maps developed in support of the revised PCB evaluations are presented in Appendix A. The proposed soil removal actions are depicted on figures and on Technical Drawings provided in Appendix B.

### **2.2 Revised Evaluation and Proposal for Parcels I8-4-201/202**

Section 3.4.2 of the Phase 2 Investigation/Evaluation Report summarized the results of the PCB evaluations for Parcels I8-4-201/202. That section reported that the existing spatial average PCB concentrations for soils in the 0- to 1-foot depth increment and the greater than 1-foot depth increment (to a depth of 7 feet, below which PCBs were not detected) were 1.08 ppm and 0.74 ppm, respectively, each of which is below the 2 ppm PCB Performance Standard for residential properties. With respect to the applicable PCB NTE level of 10 ppm for residential properties greater than 0.25 acre (Parcels I8-4-201/202 are approximately 0.54 acre), the report indicated that the maximum discrete PCB concentration in the top foot of unpaved soil at this property was 6.1

---

ppm, which is below the NTE level. It also noted, however, that four surface samples collected from the riverbank at or adjacent to this property (samples 2-SS-8, 2-SS-12, I8-4-7-15, and I8-4-7-22) contained PCB concentrations that would exceed that NTE level. The first two of these samples were collected from the upper portion of the bank and the other two were collected from an adjacent property (Parcel I8-4-7), but all four had polygons extending slightly into the Actual/Potential Lawn portion of Parcel I8-4-201/202. To be conservative, GE included these sample results in the calculation of the spatial averages. However, for NTE purposes, the report stated that, given the location of these samples on the banks, the similar PCB levels detected in other nearby bank samples, and the low levels of PCBs detected in non-bank areas in the immediate vicinity of these samples, the presence of these elevated PCB levels appears to be limited to the bank portions of the property, which would to be addressed by EPA as part of the 1½ Mile Reach Removal Action. For these reasons, GE concluded that the PCB Performance Standards were achieved under existing conditions and that no remediation was necessary at the non-bank portion of this property. (It should be noted that due to revised property boundaries for this property, the above-referenced sample location I8-4-7-22 no longer has a polygon extending onto this property.)

During preparation of a Final Completion Report, GE identified two additional sample locations on Parcels I8-4-201/202 in which PCB concentrations exceeding 10 ppm were detected in one or more samples from the top foot of unpaved soil outside the limits of EPA's 1½ Mile Reach Removal Action. Specifically, at location I8-4-5-4, PCBs were detected at 11.4 ppm (12.7 ppm in a duplicate sample) in the 0- to 0.5-foot depth sample and at 10.7 ppm in the 0.5- to 1-foot depth sample. In addition, at location I8-4-5-8, PCBs were detected at 11.3 ppm (17.7 ppm in a duplicate sample) in the 0- to 0.5-foot depth sample, although only at 1.37 ppm in the 0.5- to 1-foot depth sample. These sample locations are shown on Figure 4. Although these results were presented in the Phase 2 Investigation/Evaluation Report and were included in the PCB spatial average calculations contained in Appendix D and summarized in Section 3.4.2 of that report, they were inadvertently not identified in the NTE evaluation.

In these circumstances, since the PCB data from location I8-4-5-4 show an average concentration greater than the 10 ppm NTE level in the top foot of unpaved soil, GE has determined that the top foot of soil associated with this location will need to be removed and replaced to achieve the PCB Performance Standards at this property. At location I8-4-5-8, the average PCB concentration in the top foot (based on combining the data from the 0- to 0.5-foot and 0.5- to 1-foot depth increments) is 7.94 ppm, which does not exceed the NTE level. Nevertheless, GE proposes to remove and replace the top foot of soil associated with this location as well. The proposed soil

removal areas on this property are shown on Figure 4. The total estimated soil removal volume associated with these activities is approximately 10 cubic yards (cy).

The revised calculations of spatial average PCB concentrations at Parcels I8-4-201/202, both under existing conditions and after the proposed remediation, are presented in Appendix A (Tables A-1 through A-3 and Figures A-1 through A-9). Although the spatial average PCB concentrations at this property are already below the applicable 2 ppm Performance Standard, the proposed soil removal/replacement will further reduce the average concentration in the top foot of soil at this property, as indicated in the table below.

Depth Increment (ft)	Performance Standard (ppm)	Existing PCB Spatial Average (ppm)	Post-Remediation PCB Spatial Average (ppm)
0 – 1	2	0.99	0.88
1 – X [X=7]	2	0.72	0.72

**Notes:**

1. Consistent with the evaluations presented in the Phase 2 Investigation/Evaluation Report, the maximum concentration compared to the NTE level for residential properties does not take into account PCB concentrations within the 0- to 1-foot depth increment associated with PCB analytical results collected at sample locations 2-SS-8, 2-SS-12, or I8-4-7-15.
2. As indicated on Table A-3 in Appendix A, the maximum PCB concentration in the 0- to 1-foot depth increment following the performance of the removal actions (excluding the samples identified in Note 1) is 7.55 ppm, which does not exceed the applicable NTE level for residential properties.

Thus, the proposed removal actions at this property will address the exceedances of the NTE level at locations I8-4-5-4 and I8-4-5-8 and achieve the applicable PCB Performance Standards within the relevant depth increments.

**2.3 Revised Evaluation and Proposal for Parcels I8-4-2, -3, -4**

Section 3.5.1 of the Phase 2 Investigation/Evaluation Report addressed jointly owned Parcels I8-4-2, -3, -4. As explained in that section and noted above, GE had previously performed remediation at this property in December 1995 as an IRA under the MCP. That IRA involved the removal of approximately 250 cy of soil at depths ranging between 1 and 4 feet below ground surface (bgs), and was described in the IRA Completion Report for that property. The IRA Completion Report also presented an evaluation of post-remediation conditions to confirm that a condition of No Significant Risk and a Permanent Solution had been achieved in accordance with the MCP. That evaluation indicated that the post-remediation spatial average PCB concentrations were 0.35 ppm and 0.81 ppm in the 0- to 1-foot and greater than 1-foot depth increments (to a depth of 5 feet, below which PCBs were not detected), respectively. In addition, that report stated that the

---

maximum discrete post-remediation PCB concentration within the 0- to 1-foot depth increment at the property was 0.745 ppm.

This information was also included in the Phase 2 Investigation/Evaluation Report. That report then noted that, as part of the pre-design sampling under the CD, six samples were collected by GE from three locations on this property at depths below the IRA removal limits, and that the maximum PCB concentration in those samples was 0.097 ppm. Based on these pre-design results along with the post-remediation evaluation presented in the IRA Completion Report, it was concluded that the applicable PCB Performance Standards for residential properties under the CD were achieved under existing conditions at Parcels I8-4-2, -3, -4, and that no further response actions were necessary to address PCBs at this property. (That report also concluded, based on limited non-PCB data from this property, that there was no need for further sampling or evaluation for non-PCB constituents at the property.)

However, separate from the sampling conducted by GE, EPA conducted PCB sampling and analysis activities within and adjacent to Parcels I8-4-2, -3, -4 in May 1999, subsequent to the submittal of the IRA Completion Report. Although the data from these EPA sampling activities were presented on Figure 4 of the Phase 2 Investigation/Evaluation Report, they were not specifically considered in the evaluation presented in that report, since they “fell between the cracks” of the IRA Completion Report and the pre-design data collected by GE under the CD. Review of these EPA PCB data indicates one sample location on adjacent Parcel I8-4-7, location R93B125, which had PCB concentrations in excess of the residential NTE level and which has a polygon extending onto Parcels I8-4-2, -3, -4. The samples collected by EPA from the top foot at that location showed estimated concentrations of 27 ppm and 76 ppm in the 0- to 0.5-foot and 0.5- to 1-foot depth increments, respectively (see Figure 5). In this situation, GE proposes to remove the top foot of soil on Parcels I8-4-2, -3, -4 that falls within the polygon associated with sample location R93B125 in order to meet the residential NTE level on that property. (The portion of that polygon on Parcel I8-4-7, including the sample location itself, does not need to be removed because, as discussed in Section 2.4 below, the evaluation area on that parcel is less than 0.5 acre in size and hence the recreational NTE level of 50 ppm does not apply.)

GE has re-evaluated Parcels I8-4-2, -3, -4, taking into account the revised property boundaries as well as EPA PCB data collected following submittal of the IRA Completion Report. During the course of these evaluations, it was noted that two 0- to 1-foot sample locations removed as part of the IRA, which had PCB concentrations exceeding the residential NTE level of 10 ppm, have polygons that extend slightly beyond the removal limits presented in the IRA Completion Report. Specifically, PCBs were detected at sample location I8-4-2,3,4-9 at

31.2 ppm and 75.5 ppm in the 0- to 0.5-foot and 0.5- to 1-foot depth increments, respectively, and at sample location I8-4-2,3,4-12 at 15.3 ppm (23.9 ppm in a duplicate sample) and 1.32 ppm in the 0- to 0.5-foot and 0.5- to 1-foot depth increments, respectively (see Figure 5). Since these sample locations have polygons extending slightly beyond the prior removal limits, GE proposes to remove and replace the top foot of soils associated with these sample locations that extend beyond the removal limits presented in the IRA Completion Report.

The proposed soil removal areas on this property are shown on Figure 5. The total estimated soil removal volume associated with these activities is approximately 15 cy.

The revised calculations of spatial average PCB concentrations at Parcels I8-4-2, -3, -4, both under existing conditions and after the proposed remediation, are presented in Appendix A (Tables A-4 through A-6 and Figures A-10 through A-17). The results of the revised PCB evaluations, taking into account the above-described removal activities within Parcel I8-4-2, -3, -4, are summarized in the following table.

Depth Increment (ft)	Performance Standard (ppm)	Existing PCB Spatial Average (ppm)	Post-Remediation PCB Spatial Average (ppm)
0 - 1	2	2.14	0.86
1 – X [X=5]	2	1.63	1.63

**Note:**

1. As indicated on Table A-6 in Appendix A, the maximum PCB concentration in the 0- to 1-foot depth increment following the performance of the removal actions is 10 ppm, which does not exceed the applicable NTE level for residential properties.

Thus, the proposed removal actions at this property will address the exceedances of the NTE level and achieve the applicable PCB Performance Standards within the relevant depth increments.

**2.4 Revised Evaluation for Parcel I8-4-7**

Parcel I8-4-7 is a recreational property owned by the City of Pittsfield. Only the non-bank portion of that parcel is included within the 1½ Mile Floodplain RAAs. For a recreational area like this which will be subject to a Grant of Environmental Restriction and Easement (ERE) under the CD, the applicable Performance Standards for PCBs in soil are spatial average PCB concentrations of 10 ppm for the 0- to 1-foot depth increment, 15 ppm for the 1- to 3-foot depth increment, and 100 ppm for the 0- to 15-foot depth increment. Section 3.4.3 of the Phase 2 Investigation/Evaluation Report presented an evaluation showing that the non-bank portion of Parcel I8-4-7 achieves those PCB Performance Standards under existing conditions. Specifically, that document reported

---

that the existing spatial average PCB concentrations for that area were 6.22 ppm for the 0- to 1-foot depth increment, 4.15 ppm for the 1- to 3-foot depth increment, and 4.67 ppm for the 0- to 15-foot depth increment. Further, the document noted that since that evaluation area is less than 0.5 acre in size, the recreational NTE level of 50 ppm in the top foot of soils does not apply.

GE has re-evaluated the non-bank portion of Parcel I8-4-7, taking into account the larger area now encompassed by this area resulting from the revised property boundaries. The existing PCB data from or affecting this area are shown on Figure 6. Since this evaluation area remains well below 0.5 acre in size, the recreational NTE level does not apply. The spatial average PCB calculations for the relevant depth increments at this area are presented in Appendix A (Tables A-7 through A-9 and Figures A-18 through A-30). These results demonstrate that the applicable PCB Performance Standards are achieved under existing conditions. Specifically, the revised spatial average PCB concentrations are 3.33 ppm for the 0- to 1-foot depth increment, 2.66 ppm for the 1- to 3-foot depth increment, and 4.26 ppm for the 0- to 15-foot depth increment. This revised evaluation thus confirms that no further response actions are necessary at this property.

## 2.5 Overall Summary

Based on the above evaluations, the soil removal limits that will be necessary to meet the PCB Performance Standards at the Phase 2 floodplain properties are shown on Technical Drawing 3 in Appendix B. The estimated soil removal volumes are as follows:

<b>Evaluation Area</b>	<b>Estimated Soil Removal Volume (cy)</b>
I8-4-201/202	10
I8-4-2, -3, -4	15
I8-4-7	0
<b>Total:</b>	<b>25</b>

## **3. Design Information**

---

### **3.1 General**

This section provides additional design-related information for the remediation activities to be conducted at Parcels I8-4-201/202 and I8-4-2, -3, -4 and I8-4-201/202. These activities generally consist of excavation of impacted material, disposal of this material at an appropriate off-site facility, backfilling of excavations with clean material, and general site restoration. As discussed in Section 4, GE will select a Remediation Contractor to perform the remediation actions proposed herein. Section 4 provides further details regarding that selection process, while Section 5 provides additional site-specific implementation details associated with construction of the various design components.

### **3.2 Technical Specifications**

Technical design information regarding soil removal at Parcels I8-4-201/202 and I8-4-2, -3, -4 is provided in this document. In addition, certain of the plans comprising GE's Project Operations Plan (POP) provide additional design, construction, and implementation-related information relevant to the construction activities. With the exception of the Health and Safety Plan (HASP) (which was provided to EPA for informational purposes only), the latest proposed revisions to the POP were conditionally approved by EPA in a letter to GE dated November 8, 2006, and were resubmitted to EPA on December 7, 2006.

The POP contains a series of plans that address several common aspects of the Removal Actions Outside the River and apply to various activities to be conducted as part of those Removal Actions, ranging from initial pre-design activities to the performance and completion of remediation activities. Collectively, these plans describe the minimum requirements, general activities, protocols, and methodologies applicable to these Removal Actions. These plans include a Waste Characterization Plan, Soil Cover/Backfill Characterization Plan, Site Management Plan, Ambient Air Monitoring Plan, and Contingency and Emergency Procedures Plan. The POP also includes a Construction Quality Assurance Plan (CQAP), which provides technical requirements related to items such as backfill, topsoil, seeding, mulch, etc. In addition, the CQAP specifies activities that are relevant to certain of the construction activities, such as soil placement and grading/compaction, survey control, etc. The general provisions of the POP are applicable to the construction activities to be performed at Parcels I8-4-201/202 and I8-4-2, -3, -4 and are incorporated herein by reference.

---

The various design details are summarized herein, but are more specifically described in the Technical Drawings and Specifications developed by GE for use in selecting a Remediation Contractor. Copies of the Technical Drawings and Specifications are provided in Appendices B and C, respectively, and include those related to soil removal as well as other construction elements.

### **3.3 Soil Removal Activities**

As described in Section 2.5, GE will remove approximately 25 cy of soil from Parcels I8-4-201/202 and I8-4-2, -3, -4. The removal limits are shown on Technical Drawing 3 in Appendix B. Prior to initiating removal activities for the areas subject to soil removal, the horizontal limits of removal will be surveyed and staked in the field. During removal activities, field measurements will be made to verify that the target removal depths/elevations have been achieved for each excavation area. Excavated soils will be transported to an appropriate off-site disposal facility, as further described in Section 5.5.2. Following removal, topsoil will be obtained from an off-site source (Sections 3.4 and 5.5.3) and will be placed to re-establish original grade. The provisions specified on the Technical Drawings (Appendix B) and in the Technical Specifications (Appendix C) and POP (including the Soil Cover/Backfill Characterization Plan and the CQAP) will be utilized during the removal and backfill activities.

### **3.4 Backfilling Excavations**

Topsoil will be used to backfill the excavations at the Phase 2 floodplain properties. Information regarding the measurement, composition, and installation of acceptable topsoil is provided on the Technical Drawings and in the Technical Specifications provided in Appendices B and C, respectively.

The specific topsoil source to be used for this project will be identified by the selected Remediation Contractor. Topsoil to be used at these properties will originate either from an existing source or from a new, currently unidentified source. Existing topsoil sources consist of those sources that have been previously used for other GE remediation projects in Pittsfield and have been previously qualified for such use in submittals to EPA and/or MDEP. The sample data presented in those documents include analyses for PCBs, volatile organic compounds (VOCs), semivolatile organic compounds (SVOCs), and metals. If such an existing, approved source has been used by GE within the past 18 months, these prior analytical data will not be resubmitted to EPA. For any topsoil source that has not already been identified and characterized, representative samples will be collected and analyzed for PCBs, VOCs, SVOCs, and metals, as required by GE's approved Soil

---

Cover/Backfill Characterization Plan provided in the POP. The name of the proposed topsoil source location and the results of the analyses will be submitted to EPA in a supplemental information package prior to use of such material.

### **3.5 Flood Storage Capacity**

For soil removal/replacement activities, it is expected that the excavation and backfill/restoration activities will be conducted in such a manner as to re-establish the same general ground surface and topography of the affected areas (to the extent feasible). GE does not foresee any impact on the flood storage capacity from these actions.

### **3.6 Applicable or Relevant and Appropriate Requirements**

The remediation actions summarized herein will be subject to several ARARs. Attachment B to the SOW identifies the chemical-, action-, and location-specific ARARs for Removal Actions Outside the River. As noted above, the Removal Action for Parcels I8-4-201/202 and I8-4-2, -3, -4 includes soil removal/replacement. These activities will be performed within the 100-year floodplain of the Housatonic River. In these circumstances, this Removal Action is subject to the following ARARs identified in Attachment B to the SOW: action-specific ARARs identified in Table 2, subsection B (“Soil Removal”); potentially subsection K (“Other”); and location-specific ARARs identified in Table 3, subsection B (“Floodplains, Wetlands, and Banks”). If excavation activities involve removal and on-site storage (at the GE Plant Area) of free product, intact drums, and/or other materials, the ARARs identified in Table 2, subsection H (“Temporary On-Site Storage of Free Product, Drums, and Equipment That Will Be Disposed of Off-Site”) of Attachment B to the SOW will apply to such storage.

A summary of the ARARs that were considered with respect to the remediation proposed herein, along with the associated project component(s) and means by which the ARAR is addressed by the design and implementation activities, is as follows:

ARAR	Associated Project Components	Means by Which ARAR Will Be Addressed
Toxic Substances Control Act (TSCA) Regulations (PCB Remediation Waste) (40 CFR 761.61)	<ul style="list-style-type: none"> <li>• Soil removal</li> </ul>	<ul style="list-style-type: none"> <li>• EPA has determined that Removal Actions conducted in accordance with the CD and SOW will not pose an unreasonable risk of injury to health or the environment.</li> </ul>
TSCA Regulations (Decontamination) (40 CFR 761.79)	<ul style="list-style-type: none"> <li>• Soil removal (equipment cleaning)</li> </ul>	<ul style="list-style-type: none"> <li>• Will be attained by cleaning equipment as necessary in accordance with TSCA regulations (see Section 5.5.4).</li> </ul>
Resource Conservation and Recovery Act (RCRA) Hazardous Waste Regulations (40 CFR 261.24)	<ul style="list-style-type: none"> <li>• Soil removal</li> </ul>	<ul style="list-style-type: none"> <li>• GE will collect sample(s) from the soils to be excavated and subject the soils to the Toxicity Characteristic Leaching Procedure (TCLP). GE will then compare the results of this sampling to the applicable RCRA criteria. The results of this comparison will be used to characterize and dispose of the excavated materials.</li> </ul>
Clean Water Act NPDES Regulations (Stormwater Discharges) (40 CFR 122.44(k); 40 CFR 122.26(c)(ii)(C); 40 CFR 125.100-.104)	<ul style="list-style-type: none"> <li>• Soil removal</li> </ul>	<ul style="list-style-type: none"> <li>• Implementation of erosion and sedimentation controls (Section 5.4.5).</li> </ul>
Massachusetts Air Pollution Control Requirements (310 CMR 7.09)	<ul style="list-style-type: none"> <li>• Soil removal</li> </ul>	<ul style="list-style-type: none"> <li>• Implementation of dust control measures (as necessary) and air monitoring (Sections 5.5.1 and 5.6).</li> </ul>
TSCA Regulations (Storage for Disposal) (40 CFR 761.61; 40 CFR 761.65)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials regulated under TSCA</li> </ul>	<ul style="list-style-type: none"> <li>• Temporary storage of free product and liquids in tanks or containers at GE's existing on-plant tank system or hazardous waste storage facility, both of which meet the long-term PCB storage requirements of TSCA.</li> <li>• Temporary storage of drums and other equipment in containers at GE's existing on-plant hazardous waste storage facility, which meets the long-term PCB storage requirements of TSCA.</li> </ul>

ARAR	Associated Project Components	Means by Which ARAR Will Be Addressed
TSCA Regulations (PCB Marking Requirements) (40 CFR 761.40)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials regulated under TSCA</li> </ul>	<ul style="list-style-type: none"> <li>• Will be attained by marking PCB items in accordance with these requirements.</li> </ul>
RCRA Hazardous Waste Regulations (Storage of Hazardous Waste) (40 CFR 264, Subparts I and J 40 CFR 262.34)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials that constitute RCRA hazardous waste (if any)</li> </ul>	<ul style="list-style-type: none"> <li>• Temporary storage of free product and liquids in tanks or containers at GE's existing on-plant tank system or hazardous waste storage facility, both of which meet the long-term PCB storage requirements of TSCA.</li> <li>• Temporary storage of drums and other equipment in containers at GE's existing on-plant hazardous waste storage facility.</li> <li>• Storage of materials in tanks will be limited to 90 days or less and will meet the substantive requirements for up to 90-day accumulation in tanks.</li> <li>• Materials in containers will be stored at GE's hazardous waste storage facility, which meets the requirements for long-term storage of hazardous waste in containers.</li> </ul>
RCRA Hazardous Waste Management/Disposal Facilities Regulations (Preparedness and Prevention) (40 CFR 264, Subpart C)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials that constitute RCRA hazardous waste (if any)</li> </ul>	<ul style="list-style-type: none"> <li>• GE's existing on-plant hazardous waste storage facility meets these requirements.</li> </ul>
RCRA Hazardous Waste Management/Disposal Facilities Regulations (General) (40 CFR 264.13 - .19)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials that constitute RCRA hazardous waste (if any)</li> </ul>	<ul style="list-style-type: none"> <li>• Operation of GE's existing on-plant hazardous waste storage facility meets these requirements.</li> </ul>
RCRA Hazardous Waste Management/Disposal Facilities Regulations (Closure) (40 CFR 264.111 - .115)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials that constitute RCRA hazardous waste (if any)</li> </ul>	<ul style="list-style-type: none"> <li>• Upon termination of operations, GE's existing on-plant hazardous waste storage facility will be closed in accordance with the substantive requirements of these regulations.</li> </ul>
Massachusetts Hazardous Waste Regulations (Storage of Hazardous Waste) (310 CMR 30.680, 30.690, 30.340)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials that constitute hazardous waste under state law (other than PCBs <math>\geq</math> 50 ppm), if any</li> </ul>	<ul style="list-style-type: none"> <li>• See discussion of Federal RCRA Hazardous Waste Regulations (Storage of Hazardous Waste) above.</li> </ul>

ARAR	Associated Project Components	Means by Which ARAR Will Be Addressed
Massachusetts Hazardous Waste Regulations (Closure) (310 CMR 30.580)	<ul style="list-style-type: none"> <li>• Temporary storage of removed materials that constitute hazardous waste under state law (other than PCBs <math>\geq</math> 50 ppm), if any</li> </ul>	<ul style="list-style-type: none"> <li>• See discussion of Federal RCRA Hazardous Waste Regulations (Closure) above.</li> </ul>
TSCA Spill Cleanup Policy (40 CFR 761, Subpart G)	<ul style="list-style-type: none"> <li>• New PCB spills (if any) during on-site activities</li> </ul>	<ul style="list-style-type: none"> <li>• GE will consider and address cleanup policy for any new PCB spills that occur during the work.</li> </ul>
Executive Order for Floodplain Management [Exec. Order 11988 (1977); 40 CFR Part 6, App. A; 40 CFR 6.302(b)]	<ul style="list-style-type: none"> <li>• Soil removal activities in floodplain</li> </ul>	<ul style="list-style-type: none"> <li>• No practical alternative with less adverse impact on floodplain.</li> <li>• Implementation of erosion and sedimentation controls (Section 5.4.5).</li> <li>• Excavation and backfill/restoration will be conducted in a manner to avoid a loss in flood storage capacity (Section 3.5).</li> <li>• Restoration of habitat (Section 5.5.5).</li> </ul>
Massachusetts Wetlands Protection Act and Regulations [MGL c. 131 §40; 310 CMR 10.53(3)(q); 310 CMR 10.54 - .58]	<ul style="list-style-type: none"> <li>• Soil removal</li> <li>• Placement of fill materials within 100-year floodplain</li> </ul>	<ul style="list-style-type: none"> <li>• No practical alternative with less adverse impact on resource areas.</li> <li>• All practical measures will be taken to minimize adverse impact on river.</li> <li>• Implementation of erosion and sedimentation controls (Section 5.4.5).</li> <li>• Excavation and backfill/restoration will be conducted in a manner to avoid a loss in flood storage capacity (Section 3.5).</li> </ul>

In addition to the requirements specified above, if any historic or prehistoric artifacts or sites or if any threatened or endangered species are identified during the course of the remediation work, GE will notify EPA and discuss with EPA the need for and scope of additional actions, if any, regarding such resources.

## **4. Contractor Selection**

---

GE will select a Remediation Contractor that is qualified to complete the on-site soil remediation/construction activities. GE anticipates selecting a Remediation Contractor following receipt of EPA approval of this Work Plan.

Upon selection, the Remediation Contractor will be responsible for providing several submittals to GE, including those identified in Section 5.3 of this document. GE will subsequently provide the Contractor information and submittals to EPA in a supplemental information package, as described in Section 7 of this document.

## 5. Implementation Plan

### 5.1 General

As indicated in Section 3.2, the POP contains a series of plans that address several common aspects for Removal Actions Outside the River. As relevant, those plans will be followed during implementation of the Removal Action associated with Parcels I8-4-201/202 and I8-4-2, -3, -4 at the Phase 2 floodplain properties.

As a supplement to the implementation-related procedures specified in the POP plans, this section provides additional details regarding certain construction activities. Specifically, this section identifies the requirements for project-specific plans to be submitted by the selected Remediation Contractor, describes site-specific elements of the site preparation and construction activities, and summarizes the project-specific perimeter air monitoring approach.

### 5.2 Project Participants

To the extent possible, the following table identifies the key project participants involved in the design and implementation of the remediation/construction activities summarized herein, along with their project roles and contact information:

Organization/Contact	Role	Address and Phone Number
United States Environmental Protection Agency Dean Tagliaferro	<ul style="list-style-type: none"> <li>- Lead regulatory agency.</li> <li>- Review and approval of this document.</li> <li>- Oversight of Removal Actions.</li> </ul>	USEPA Region 1 One Congress Street, Suite 1100 Boston, MA 02114-2023 (617) 918-1240
General Electric Company Richard W. Gates	<ul style="list-style-type: none"> <li>- Supervise pre-design, construction, and documentation activities related to the Removal Action.</li> <li>- Supervise implementation of the Removal Action and related activities to ensure they are conducted in accordance with the CD.</li> <li>- Direct/coordinate activities of the Remediation Contractor and other GE-contracted organizations.</li> <li>- Responsible for preparation of a Final Completion Report.</li> </ul>	General Electric Company 159 Plastics Avenue Building 59 Pittsfield, MA 01201 (413) 448-5909

Organization/Contact	Role	Address and Phone Number
BBL, an ARCADIS company  James M. Nuss, P.E., LSP	<ul style="list-style-type: none"> <li>- Supervising Remediation Contractor for GE.</li> <li>- Review Remediation Contractor submittals.</li> <li>- Project coordination and documentation.</li> <li>- Provide technical assistance related to implementation of the Removal Action.</li> <li>- Assist in verifying that the Removal Action is complete and performed in accordance with this document.</li> <li>- Prepare Final Completion Report.</li> </ul>	BBL, an ARCADIS company 6723 Towpath Road Syracuse, NY 13214 (315) 446-9120
Berkshire Environmental Consultants, Inc.  Maura Hawkins	<ul style="list-style-type: none"> <li>- Design and implement perimeter air monitoring in conjunction with construction activities.</li> </ul>	Berkshire Environmental Consultants, Inc. 152 North Street, Suite 250 Pittsfield, MA 01201 (413) 443-0130
Remediation Contractor (To be determined)	<ul style="list-style-type: none"> <li>- Implement all construction-related activities.</li> </ul>	(To be determined)

### 5.3 Contractor Submittals

Once selected, the Remediation Contractor will be required to provide certain pre-mobilization submittals to demonstrate that the Contractor: a) has an adequate understanding of the scope of the Removal Action; b) has developed a project-specific sequence that can efficiently perform all on-site activities within the allowable schedule; c) will utilize acceptable materials, products, and procedures; and d) will perform all activities in a manner that is protective of on-site workers and the surrounding community. Certain of those submittals relate to the manner in which the work activities will be implemented and, as such, will supplement the information and procedures presented in this document. Those submittals include an Operations Plan, Health and Safety Plan (HASP), and Contingency Plan. Each of these submittals is further described below.

#### **Operations Plan**

The purpose of the Operations Plan is to summarize the materials, procedures, timelines, and controls that the Contractor intends to utilize during project activities. This plan will be prepared in consultation with GE and its Supervising Contractor and will include the following:

- 
- List of equipment to be used on site;
  - Residential property protection procedures;
  - Work Schedule;
  - The Contractor's proposed plan for controlling vehicular and pedestrian traffic during the performance of construction activities;
  - The Contractor's qualifications package (if requested by GE);
  - Stormwater (including run-on and run-off), erosion, noise, and dust control measures;
  - The Contractor's proposed excavation approach;
  - Materials handling approach; and
  - Equipment cleaning procedures.

### **HASP**

The HASP will identify the Remediation Contractor's project-specific health and safety procedures and will be developed to address the minimum requirements established in the POP and 29 CFR 1910 and 1926. The plan will address those activities to be undertaken by the Contractor and present required information including, but not limited to, the following (as applicable):

- Training;
- Identification of key personnel (including the Contractor's Health and Safety Officer);
- Medical surveillance;
- Site hazards;
- Work zones;
- Personal safety equipment and protective clothing;
- Personal air monitoring;
- Personnel/equipment cleaning;
- Confined space entry;
- Construction safety procedures;
- Standard operating procedures and safety programs; and
- Material safety data sheets.

---

## **Contingency Plan**

The Contingency Plan will set forth procedures for responding to emergency conditions or events that may occur during the performance of the Removal Action, and will include the following information:

- A spill prevention control and countermeasures plan for all materials brought on the work site;
- Emergency vehicular access/egress;
- Evacuation procedures of personnel from the work site;
- For work sites that include or are adjacent to a surface water drainage way, a flood control contingency plan identifying measures to protect the work site(s) and the waterway from impact in the event of high water and/or flood conditions;
- A list of all contact personnel, with phone numbers and procedures for notifying each;
- Routes to local hospitals; and
- Identification of responsible personnel who will be in a position at all times to receive incoming phone calls and to dispatch Contractor personnel and equipment in the event of an emergency situation.

In addition to the required pre-mobilization document submittals specified above, the Remediation Contractor will be required to prepare a submittal specifying the source and, if necessary, the corresponding analytical data for proposed topsoil source to be used during the performance of this project.

Once developed by the selected Remediation Contractor and approved by GE, each of the above-listed Contractor submittals will be submitted to EPA in a supplemental information package. In addition to these submittals, the Contractor is required to provide GE with various other submittals over the course of this project. The overall purpose of such submittals is to verify that the materials and procedures used in the construction activities are consistent with the design of the Removal Action. In accordance with the POP, all Contractor submittals will be tracked to confirm their receipt and approval. A copy of the Technical Submittal Register is provided in Appendix D. (Please note that submittals required by GE but not subject to submittal to EPA as part of the supplemental information package have been shaded.)

---

## 5.4 Site Preparation

General site preparation activities are shown on Technical Drawing 2. Immediately prior to or following mobilization to the work area, the selected Remediation Contractor will perform several site preparation activities to establish the necessary site controls, features, and procedures for subsequent implementation of the construction activities. These activities include the following:

- Obtaining utility clearances;
- Establishing site controls and access;
- Site survey and layout;
- Installing erosion and sedimentation control measures; and
- Surface preparation.

General information regarding various site preparation activities (e.g., coordinating with local utilities, permitting, verifying existing conditions, establishing work areas, etc.) is provided in the general CQAP (part of the POP); the information provided below supplements that CQAP by providing additional site-specific details associated with certain of these activities.

### 5.4.1 Utility Clearances

Aboveground and underground utilities that could potentially be affected by the construction activities will be identified prior to initiating any intrusive subsurface activities (e.g., soil excavation). As indicated on the technical drawings in Appendix B, an overhead electric line is known to pass across one of the areas to be remediated on Parcels I8-4-2, -3, -4. The selected Remediation Contractor will be responsible for coordinating with DIGSAFE to determine the locations of all potentially affected utilities at the start of the work and coordinating with the owners of the utilities regarding relocation/termination of any utilities, as required.

### 5.4.2 Work Area Security

The level of work area security will depend on the activities being performed and the location of those activities. Security measures will be selected in consultation with the Remediation Contractor and may consist of

---

temporary fencing or barriers, maintenance of sign-in/sign-out sheets, and implementation of safe work practices, as described below.

**Temporary Fencing** - Temporary construction fencing will be installed, as needed, to delineate and secure areas during ongoing construction activities. While other fencing configurations of equivalent performance may be considered, such temporary fencing is expected to be at least 4 feet in height, constructed of high-density polyethylene, and orange in color.

**Sign-In/Sign-Out Sheet** - For the duration of construction activities, a sign-in/sign-out sheet will be maintained for the work site. All on-site personnel and visitors will be required to sign in upon entering the work area and sign out upon leaving.

Safe work practices will also be employed at this work site. These activities may include any of the following:

**Daily Safety Meetings** - Such meetings, commonly referred to as tailgate meetings, are typically held with the Contractor to discuss hazards potentially encountered during the planned daily activities.

**Posting of Warning Tape** - To restrict access during construction activities, warning tape may be installed at locations to delineate certain areas, such as the exclusion zone, contaminant reduction zone, and/or support zone.

**Use of Flagmen or Other Signaling Devices** - Certain excavation activities in high traffic areas may necessitate the use of flagmen or other signaling devices (i.e., flashing beacons mounted on sawhorses).

### 5.4.3 “Clean” Access Area

Since a number of activities will require periodic access/egress between the work site and adjacent areas, a “clean” transition area will be established. Such an area will be used for equipment/material delivery and for the positioning of trucks for subsequent loading and off-site transport of excavated materials. The specific location and construction of the access area will be developed by the Remediation Contractor based on factors such as the layout of the site, traffic patterns, and material handling procedures.

---

#### **5.4.4 Survey Control**

In accordance with the CQAP, survey controls will be established at the start of the work and maintained throughout the construction activities. GE will provide survey benchmarks so that the Remediation Contractor can establish appropriate horizontal and vertical control consistent with the existing survey data. As stated in the CQAP, the Remediation Contractor will establish a minimum 50-foot control grid within Parcels I8-4-201/202 and I8-4-2, -3, -4. This survey will be performed to verify that the horizontal and vertical limits of removals have been obtained and the final surface grade has been achieved.

#### **5.4.5 Erosion and Sedimentation Control Measures**

Erosion and sedimentation control measures will be implemented as necessary to minimize the potential for erosion of exposed soils and subsequent accumulation of materials in site drainage pathways. In addition, these measures will be used to divert rainfall runoff from entering work areas and open excavations.

For the removal actions described herein, erosion control measures to be implemented will generally include placement of hay bales and/or staked silt fencing along the downhill side of the work areas. The approximate location and layout of the hay bales/siltation fencing are indicated on Technical Drawing 2. Fencing will be placed at the start of the site work activities and will be maintained until a good stand of vegetation is established.

#### **5.4.6 Surface Preparation**

Various surface preparation activities will be performed prior to or in conjunction with the initial site preparation activities. These surface preparation activities are specified on Technical Drawing 2.

### **5.5 Construction Activities**

#### **5.5.1 Soil Removal and Material Handling**

The proposed removal actions will require excavation and handling of certain existing soils within Parcels I8-4-201/202 and I8-4-2, -3, -4. Specifically, existing soils within the excavation limits and depths, as depicted on

---

Technical Drawing 3, will be removed using conventional construction equipment (e.g., excavator, backhoe, and loader). Each excavation will extend to a minimum depth of 1 foot below ground surface (bgs).

As soils are excavated and prior to their transport to the appropriate off-site disposal facility, a number of intermediate on-site handling activities may be necessary. To ensure that such activities are performed in a manner that minimizes the potential for inadvertent releases to the environment, unsafe conditions for on-site and off-site personnel, and delays or complications in project completion, several on-site material handling procedures will be implemented. The specific method(s) of handling the removed soils will be based on, but not limited to, the following considerations:

- The characteristics of the excavated soils and corresponding disposition requirements;
- The locations from which the materials are removed and their proximity to the loading area(s); and
- The overall sequence and schedule of the removal actions.

To reduce the potential for the release of PCBs to the environment during removal and handling activities, the number of times that the excavated material is handled will be kept to a minimum. To accomplish this, the Remediation Contractor will conduct direct loading to trucks to the extent practical. Additional information regarding material handling is discussed below.

- To reduce the potential for migration of PCBs due to wind- and rainfall-related factors, work areas where excavation activities are yet to be completed will be protected with a cover (e.g., polyethylene sheeting) which will be anchored when the area is not under active excavation/use. In addition, if concerns regarding airborne dust are identified or suspected, water will be sprayed to keep the open excavation (or excavated soils) moist.
- To the extent feasible and practicable, material handling and loading areas will not be established in locations that may interfere with construction operations or necessary traffic flow. In addition, material handling areas will be located so as to take into account site topography and avoid (to the extent possible) low-lying drainage areas where surface runoff is likely to accumulate.
- Additional erosion and sedimentation control measures (e.g., hay bales and geotextile fencing) will be utilized as necessary.

---

Based on the specified soil removal limits identified on Technical Drawing 3, the total volume of existing materials to be removed from Parcels I8-4-201/202 and I8-4-2, -3, -4 is approximately 25 in-situ cy. These excavated soils will be transported to and disposed of at an appropriate off-site facility. Additional information regarding the transport and disposition of excavated materials is provided below.

### **5.5.2 Transport and Disposition of Excavated Materials and Remediation-Derived Waste**

As indicated above, all excavated materials will be transported to and disposed of at an appropriate off-site disposal facility. Previous sampling and analysis conducted for soils at the Phase 2 floodplain properties indicate that soils associated with two of the sample locations driving removal (R93B125 and I8-4-2,3,4-9) are considered to have PCB concentrations over 50 ppm and thus are regulated for disposal under TSCA, while the soils associated with the other target sample locations (I8-4-5-4, I8-4-5-8, and I8-4-2,3,4-12) have concentrations less than 50 ppm and thus are not regulated for disposal under TSCA. Given the relatively small removal volume at Parcels I8-4-201/202 and I8-4-2, -3, -4 (approximately 25 cy), GE has elected to dispose of all of the excavated soils at an appropriate off-site facility permitted to accept TSCA-regulated waste. In addition, GE will collect samples from within the removal limits (shown on Technical Drawing 3) for Toxicity Characteristic Leaching Procedure (TCLP) analysis to determine if the material is subject to regulation as hazardous waste under the Resource Conservation and Recovery Act (RCRA).

The Remediation Contractor will be required to implement the following procedures for the transport of excavated materials from Parcels I8-4-201/202 and I8-4-2, -3, -4 to the appropriate off-site disposal facility:

- Employ qualified personnel trained per U.S. Department of Transportation (DOT) requirements for handling and shipping hazardous materials, with such training to include general safety, emergency response, exposure protection, accident prevention, preparation of shipping papers, and securing loads.
- Employ drivers that have a Commercial Driver's License (CDL) with a Hazardous Materials Endorsement.
- Utilize trucks that are DOT-inspected.
- Include in its HASP, Operations Plan, and Contingency Plan, detailed provisions for responding to transportation emergencies such as spills, releases, or other incidents.

- 
- Maintain records of the number of loads of materials sent off-site on a daily basis.
  - Confirm that the materials are suitable for transport (i.e., no free liquids).

The transport of excavated materials from these floodplain properties to the appropriate off-site disposal facility will be conducted in accordance with the following guidelines:

- After a safety check of the truck, the truck bed will be lined with polyethylene. Excavated soil will be placed in the truck and the load will be covered.
- Hazardous Waste Manifests will be prepared and signed by the truck driver. The DOT shipping description to be used on the manifests will be:

“RQ, Polychlorinated biphenyls, mixture, 9, UN 2315, PG 111, RQ”

### **5.5.3 Backfilling of Excavations**

Backfilling operations will be initiated as soon as practicable after completion and proper documentation of excavation activities (i.e., survey control). It is anticipated that the excavations will be backfilled with topsoil. Following backfilling, excavation areas will be subject to seeding and mulching activities to establish adequate vegetation.

Topsoil material will be clean, natural material. The specific topsoil source to be used for this project will be identified by the Remediation Contractor. A description of the process for identifying such a source and, if necessary, submitting the analytical data for it was presented in Section 3.4.

### **5.5.4 Equipment Cleaning**

Equipment and materials that have come into contact with existing soils at Parcels I8-4-201/202 and I8-4-2, -3, -4 during the construction activities will be cleaned prior to relocation to an area outside the work zone (i.e., the excavation and loading areas), prior to handling topsoil, and prior to its departure from these properties. Equipment cleaning will be conducted as specified in Section 3.5 of the Site Management Plan in the POP.

---

### **5.5.5 Restoration of Disturbed Vegetation**

This section pertains to the restoration of vegetated areas both within and outside the soil removal limits. Technical Drawing 4 (in Appendix B) depicts the areas that will be subject to vegetative restoration. Prior to the initiation of remediation activities, the Remediation Contractor will be required to identify any existing trees and shrubs (i.e., type, quantity, size, etc.) that are located within the limits of, or would be affected by, the remediation activities. Upon completion of removal actions, GE will plant trees/shrubs of similar species. GE will also discuss the scope of restoration activities with the property owners during the development process.

### **5.6 Perimeter Air Monitoring**

Ambient air monitoring for PCBs and particulate matter will be performed during the remediation actions. The scope of the ambient air monitoring program is presented in Appendix E to this document. In overview, ambient air monitoring for PCBs will include collection of ambient air samples using “high volume” samplers equipped with glass fiber filters and polyurethane foam (PUF) cartridges. The samples will be collected, analyzed, and evaluated using the procedures specified in EPA Compendium Method TO-4A. To obtain representative data on ambient levels of PCBs around the construction site before and during construction activities, a PCB air sampling event will be performed prior to the start of construction activities, and an additional sampling event will be performed during the course of construction (which is anticipated to be implemented within a 1 to 2 week timeframe). Ambient air monitoring for particulates will be performed on a continuous basis during all active construction activities using real-time particulate air monitors.

The ambient air monitoring scope of work in Appendix E discusses the locations for the air monitoring. It preliminarily identifies two potential monitoring locations (shown on Figure E-1 in Appendix E). For PCB air monitoring, that scope of work notes that PCB background monitoring will be conducted at two locations prior to any on-site soil remediation activity, and that during soil removal activities, monitoring will be conducted at two stations. It indicates further that PCB monitoring will also be conducted at one appropriate background location on Longfellow Avenue in Pittsfield, Massachusetts. For particulate monitoring, the scope of work in Appendix E states that such monitoring will be conducted at two on-site locations during soil remediation activities, which may vary slightly as remediation activities progress; and it references the preliminary monitoring locations shown on the attached figure as candidate locations for such monitoring. It also provides that background air monitoring for particulates will be conducted at the background station on Longfellow Avenue. The scope of work explains that the specific locations for the monitors will be selected based on the

---

location and nature of the soil remediation activity, predominant wind direction, location of potential receptors, availability of power, site accessibility, and site security.

## ***6. Post-Construction Activities***

---

### **6.1 General**

This section addresses the post-construction activities to be performed by GE at Parcels I8-4-201/202 and I8-4-2, -3, -4. These activities include project closeout activities and Post-Removal Site Control activities.

### **6.2 Project Closeout – Pre-Certification Inspection and Completion Report**

Following completion of the remediation activities at Parcels I8-4-201/202 and I8-4-2, -3, -4, the remaining project close-out activities for the Phase 2 floodplain properties will be performed. These activities include the execution and recording of an ERE for Parcel I8-4-7 by the City of Pittsfield, the conduct of a pre-certification inspection of the Phase 2 properties with EPA and MDEP; and the development and submission of a Final Completion Report. At this time, based on discussions with EPA, it is anticipated that, instead of submitting separate Final Completion Reports for the phases of the floodplain properties, GE will submit Final Completion Reports for the 1½ Mile Floodplain Residential Properties and the 1½ Mile Floodplain Non-Residential Properties. A description of the remediation actions performed at Parcels I8-4-201/202 and I8-4-2, -3, -4 will be included in the Final Completion Report for the 1½ Mile Floodplain Residential Properties. That report will also include a Post-Removal Site Control Plan (consistent with Section 6.3 below).

### **6.3 Post-Removal Site Control Activities**

Post-construction inspection and maintenance (I/M) activities will be performed at Parcels I8-4-201/202 and I8-4-2, -3, -4, as required by Technical Attachment J to the SOW, at the frequencies and duration described below.

#### **6.3.1 Periodic Inspections**

GE will initiate post-construction inspections of the restored surfaces at Parcels I8-4-201/202 and I8-4-2, -3, -4 following completion of the construction activities. Such inspections will be performed for areas that were backfilled and restored.

---

For backfilled/restored areas, the first inspection will be performed approximately one month after completion of construction activities. Thereafter, these areas will be inspected every 6 months for a period of 2 years (subject to subsequent EPA approval of a different frequency). At a minimum, these inspections will include visual observations of the following: (a) erosion controls to verify their continued effectiveness until such time vegetation is sufficiently established; (b) any areas where excessive settlement has occurred relative to the surrounding areas; (c) any drainage or growth problems due to possible over-compaction of the backfill materials; and (d) other conditions that could jeopardize the completed remediation. Inspections are anticipated to occur in May and October of each year to ensure that the vegetation is growing as anticipated and is providing the desired degree of erosion control.

### **6.3.2 Maintenance/Repair**

In connection with the periodic inspections, GE will address any conditions that need maintenance or repair. Examples of maintenance/repair activities that may be identified and conducted as a result of the periodic inspections include, but are not limited to, placement of additional topsoil in areas of erosion or settlement and repair or replacement of any components of the backfilled/restored areas exhibiting deficiencies or potential problems. If needed, additional planting or seeding will be performed to replace dead or dying vegetation.

Any such conditions noted as a result of periodic inspections will be addressed as soon as practicable. The nature of the associated maintenance/repair will be documented in the subsequent inspection report.

### **6.3.3 Inspection Reporting**

Following each inspection described in Section 6.3.1, an inspection report will be prepared and submitted to EPA. Each such report will document I/M activities performed since submittal of the previous inspection report. As required by Attachment J to the SOW, these reports will include the following information (as relevant):

- Description of the type and frequency of inspection and/or monitoring activities conducted;
- Description of any significant modifications to the inspection and/or monitoring program made since submittal of the preceding monitoring report;

- 
- Description of any conditions or problems noted during the inspection and/or monitoring period which are affecting or may affect the completed remediation;
  - Description of any corrective measures taken;
  - Results of sampling analyses and screening (if any) conducted as part of the inspection and/or monitoring program (if any); and
  - Description of any measures that may need to be performed to correct any conditions affecting the completed remediation.

#### **6.4 Additional Inspection Activities**

In addition to the inspections described in Section 6.3 as part of Post-Removal Site Control activities, GE will conduct the inspections required by the CD (Paragraph 57.o) of the City-owned property for which an ERE will have been recorded (Parcel I8-4-7). The details of these inspection activities and associated reporting will be presented in the Final Completion Report for the 1½ Mile Floodplain Non-Residential Properties.

## **7. Schedule**

---

As described in Section 4, following receipt of EPA approval of this Phase 2 RD/RA Work Plan Addendum, GE will select a Remediation Contractor on a schedule to be agreed upon by GE and EPA. Following the selection of a Remediation Contractor, GE will submit a supplemental information package to EPA as a follow-up to this document. The supplemental information package is anticipated to include the following:

- Identification of and contact information for the selected Remediation Contractor;
- Copies of the Remediation Contractor's pre-mobilization submittals (i.e., Operations Plan, HASP, and Contingency Plan);
- Identification of a topsoil source and location; and
- Analytical data for sample(s) collected from the topsoil source (unless the source has already been approved based on previously submitted analytical data).

Following EPA approval of this document and the supplemental information package, site preparation activities will be initiated. The specific schedule for the implementation and completion of the remediation actions at Parcels I8-4-201/202 and I8-4-2, -3, -4 will depend on several factors, including the timing of EPA approval of this Addendum and the supplemental information package and receipt of the necessary access permission from the property owners to conduct the proposed remediation actions at their properties. GE currently anticipates that remediation activities at these properties will be completed during the 2007 construction season. Additional details regarding overall project duration will be provided in the Remediation Contractor's Work Schedule – which is a required component of the Contingency Plan submittal (Section 5.3) – to be provided to EPA as part of the forthcoming supplemental information package. With respect to access, if GE is unable to obtain access permission from the owners of Parcels I8-4-201/202 and/or I8-4-2, -3, -4 after using “best efforts” (as defined in the CD) to do so, it will so advise EPA and MDEP and seek their assistance in obtaining such access pursuant to Paragraph 60.f(i) of the CD.

Once GE has determined that the remediation actions at Parcels I8-4-201/202 and I8-4-2, -3, -4 are complete (excluding Post-Removal Site Control activities) and that the applicable Performance Standards have been attained for all properties within Phase 2 (including recording of the ERE for Parcel I8-4-7), GE will proceed with the remaining project close-out activities described in Section 6.2, including scheduling a pre-certification

---

inspection and preparation of a Final Completion Report. Periodic inspection reports will continue to be provided to EPA as outlined in Sections 6.3 and 6.4.

# *Figures*

---

S:\R-85-LIP LAF DMW LAYER ON\* OFF=REF\*  
 G:\VE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122001.DWG SAVED:12/11/2006 10:28 AM LAYOUT:1 PAGES:1 PENTABLE:PLT\FULL.CTB PRINTED:12/11/2006 1:05 PM BY:DWODARCZYK  
 PROJECT NAME: 40122X10  
 PRESS IMAGES: 40122X00



**REMOVAL ACTION AREA**  
 PHASE 2 FLOODPLAIN PROPERTIES

- NOTES:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE WERE PHOTOGRAMMETRICALLY MAPPED FROM APRIL 1990 AERIAL PHOTOGRAPHS.
  2. SITE BOUNDARIES ARE APPROXIMATE.
  3. NOT ALL PHYSICAL FEATURES SHOWN.

GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**REMOVAL ACTION AREA**




SVR-85-NES-LAF-DIW-LAYER-ON\*-OFF-REF\*  
 G:\VE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122002.DWG SAVED:12/12/2006 9:57 AM LAYOUT:2 PAGES:UP:----- PENTABLE:PLIFULLCTB PRINTED:12/12/2006 9:57 AM BY:DWODARCZYK  
 PROJECT NAME: IMAGES:  
 40122X09  
 40122X05  
 40122X06  
 40122X07  
 40122X08  
 40122X00



- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES AS DESIGNATED IN SOW
  - PROPERTY BOUNDARY
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-4** PROPERTY ID
  - 10 YEAR FLOODPLAIN
  - VEGETATION
  - INDEX ELEVATION CONTOUR
  - INTERMEDIATE ELEVATION CONTOUR
  - PAVED ROADWAY
  - UNPAVED ROADWAY OR TRAIL
  - 1 1/2 MILE REACH
  - RESIDENTIAL FLOODPLAIN PROPERTIES - ACTUAL/POTENTIAL LAWN AREA, AS DESIGNATED IN SOW
  - NON-RESIDENTIAL/NON-COMMERCIAL FLOODPLAIN PROPERTIES - NON-BANK AREA, AS DESIGNATED IN SOW

- NOTES:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE WERE PHOTOGRAMMETRICALLY MAPPED FROM APRIL 1990 AERIAL PHOTOGRAPHS.
  2. PARCEL IDENTIFICATION AND BOUNDARIES ARE BASED ON CITY OF PITTSFIELD TAX ASSESSORS' INFORMATION.
  3. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**SITE PLAN**





- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2)
  - APPROXIMATE PARCEL BOUNDARY (SEE NOTE 1)
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - PARCEL BOUNDARY PREVIOUSLY SPECIFIED IN THE PHASE 2 INVESTIGATION/EVALUATION REPORT
  - 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION

**NOTES TO FIGURE:**  
 1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIIIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**PROPERTY BOUNDARY COMPARISON FOR  
 PARCELS 18-4-2, -3, -4, 18-4-201/202, AND  
 18-4-7**



FIGURE  
**3**

an ARCADIS company

SYR-85-NES LAF DWG LAYER: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004\PHASE2\_ADDENDUM\40122003.DWG  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A  
 PENTABLE:PLT\FULL.CTB PRINTED:12/11/2006 1:07 PM BY: DWODARCZYK  
 SAVED:12/11/2006 10:42 AM LAYOUT: 3 PAGESETUP:-----

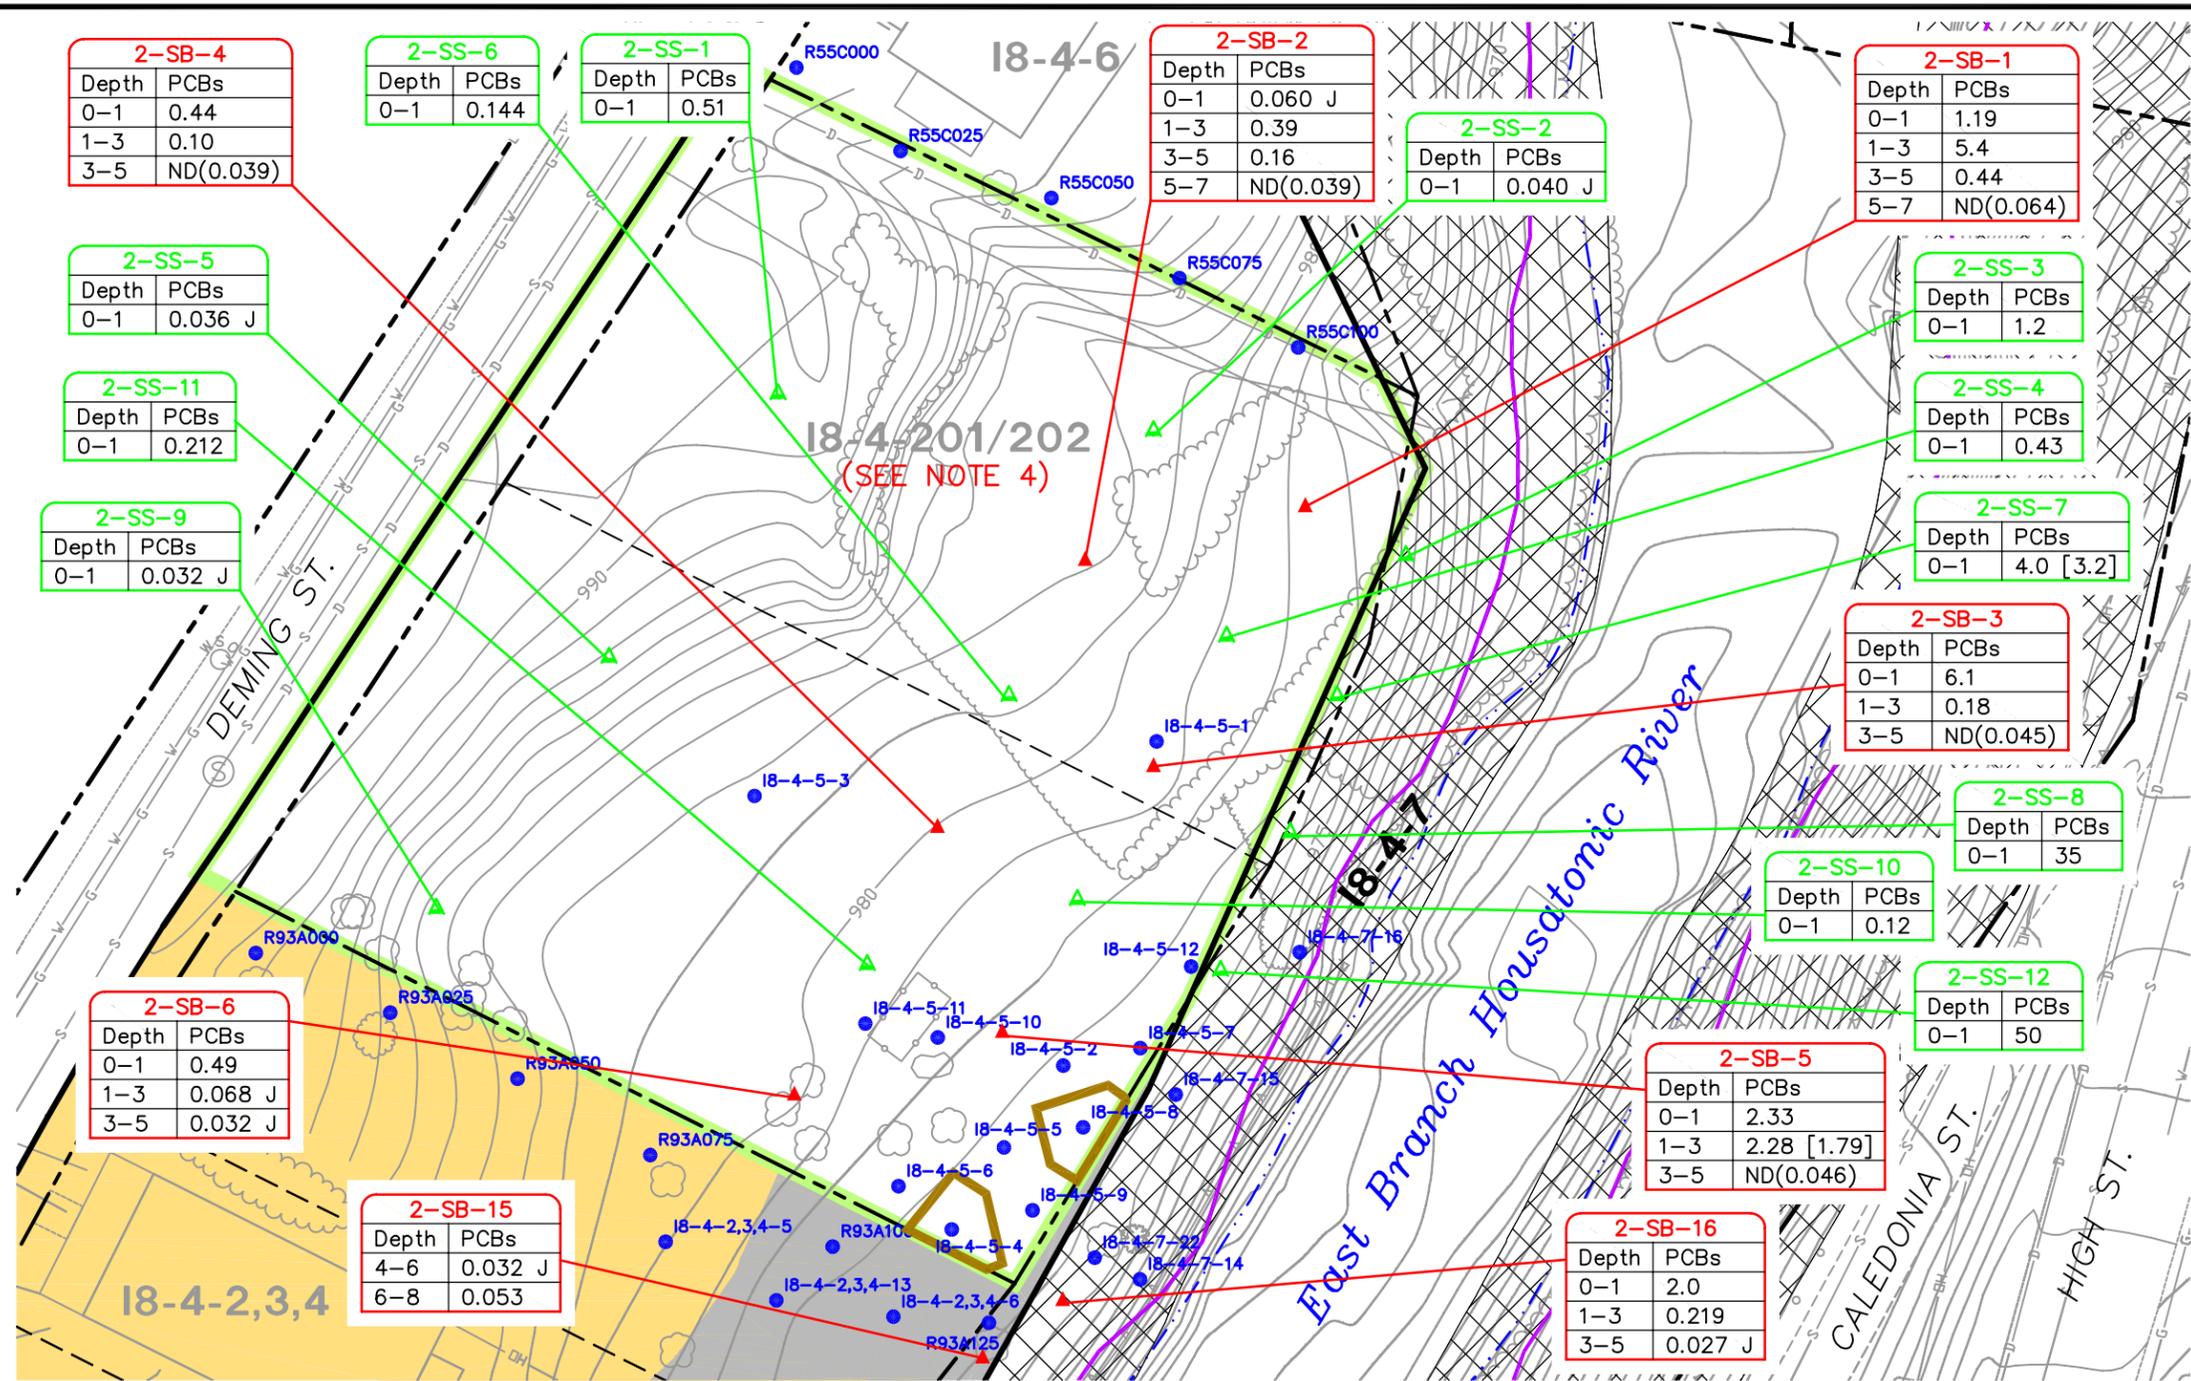

**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- - - - - APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- - - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-5-3 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SS-1 PRE-DESIGN (2003) SURFACE SOIL SAMPLE LOCATION
- ▲ 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- AREA PROPOSED FOR SOIL REMOVAL

**NOTES TO FIGURE:**

- THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
- THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
- PCB CONCENTRATIONS ARE REPORTED AS DRY WEIGHT PARTS PER MILLION, PPM.
- FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
- SAMPLE LOCATIONS ARE APPROXIMATE.

**SUMMARY OF EXISTING PCB SOIL SAMPLE RESULTS**  
 (RESULTS ARE PRESENT AS DRY WEIGHT PARTS PER MILLION, PPM)  
 (SAMPLE INCREMENTS IN FEET BELOW GROUND SURFACE)

Sample ID	0-0.5	0.5-1	1-1.5	1.5-2	2-2.5	2.5-3	3-3.5	3.5-4	4-4.5	4.5-5
18-4-5-1	0.48	0.63	---	---	---	---	---	---	---	---
18-4-5-2	0.13	0.61	---	---	---	---	---	---	---	---
18-4-5-3	0.19	0.28	---	---	---	---	---	---	---	---
18-4-5-4	11.4[12.7]	10.7	0.281	22.1	1.34	ND(0.1)	---	---	---	---
18-4-5-5	0.343	0.266	---	---	---	---	---	---	---	---
18-4-5-6	6.62[6.7]	0.909	0.292	---	---	---	---	---	---	---
18-4-5-7	3.08	7.55	6.26	0.787	5.04	ND(0.1)	---	---	---	---
18-4-5-8	11.3[17.7]	1.37	0.148	0.258	---	---	---	---	---	---
18-4-5-9	1.59	5.28	0.773	0.512	---	---	---	---	---	---
18-4-5-10	0.102[0.274]	ND(0.1)	---	---	---	---	---	---	---	---
18-4-5-11	ND(0.1)	ND(0.1)	---	---	---	---	---	---	---	---
18-4-5-12	0.498	2.19	2.43	0.413	0.629	---	---	---	---	---
18-4-2,3,4-5	0.716	0.462	0.349	0.146	---	---	---	---	---	---
18-4-2,3,4-6	4.77	2.26	1.06	46.1	10.4	4.64	8.2	1.3	0.129	0.594
18-4-2,3,4-13	ND(0.1)	ND(0.1)	ND(0.1)	ND(0.1)	---	---	---	---	---	---
18-4-7-14	3.14	2.52	2.49	4.66	0.925	1.54	---	---	---	---
18-4-7-15	9.5[9.2]	244	11.4	3.92	7.69	6.24	---	---	---	---
18-4-7-16	2.75	7.57	5.08	1.47[1.81]	1.22	0.324	---	---	---	---
18-4-7-22	7.87	13	65.6	42.2	700	6.8	---	---	---	---

Sample ID	0-0.5	0.5-1	1-1.5	1.5-2
R55C000	ND(0.6)	0.2J	ND(0.5)	ND(0.5)
R55C025	ND(0.6)	ND(0.5)	ND(0.5)	ND(0.1)[ND(0.5)]
R55C050	ND(0.6)	ND(0.5)	ND(0.6)	ND(0.7)
R55C075	ND(0.13)[ND(0.6)]	ND(0.5)	ND(0.5)	0.3J
R55C100	ND(0.5)	---	---	---
R93A000	ND(0.5)	ND(0.6)	ND(0.7)	ND(0.5)
R93A025	ND(0.5)	ND(0.5)	ND(0.5)	ND(0.5)
R93A050	ND(0.5)	ND(0.6)	ND(0.6)	ND(0.5)
R93A075	ND(0.5)	ND(0.5)	ND(0.5)	ND(0.6)
R93A100	0.7J	0.5J	ND(0.7)	ND(0.6)
R93A125	0.097[0.2J]	ND(0.5)	ND(0.5)	ND(0.5)

Notes to Tables:


A. Sample data obtained from EPA database titled 040403\_usepa\_hr\_dbase1.mdb and GE database titled hr040903.mdb.

B. J - Indicates estimated value less than the CLP-required quantitation limit.

C. --- - Indicates sample interval was not analyzed.

D. Duplicate results presented in brackets.

E. Shading indicates soil was removed at this depth and clean backfill was placed at these locations.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PCB SOIL SAMPLE LOCATIONS/RESULTS  
 AND PROPOSED SOIL REMOVAL -  
 PARCELS 18-4-201/202**

**BBL**  
 an ARCADIS company

FIGURE 4

SYR-85-NES LAF DMW LAYER: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004\PHASE2\_ADDENDUM\40122004.DWG  
 PENTABLE:PLT\FULL.CTB PRINTED:12/12/2006 9:30 AM BY:DWODARCZYK  
 PAGESETUP:----- LAYOUT:4  
 SAVER:12/12/2006 8:33 AM  
 PROJECTNAME: IMAGES:  
 XREFS: 40122X03  
 40122X04

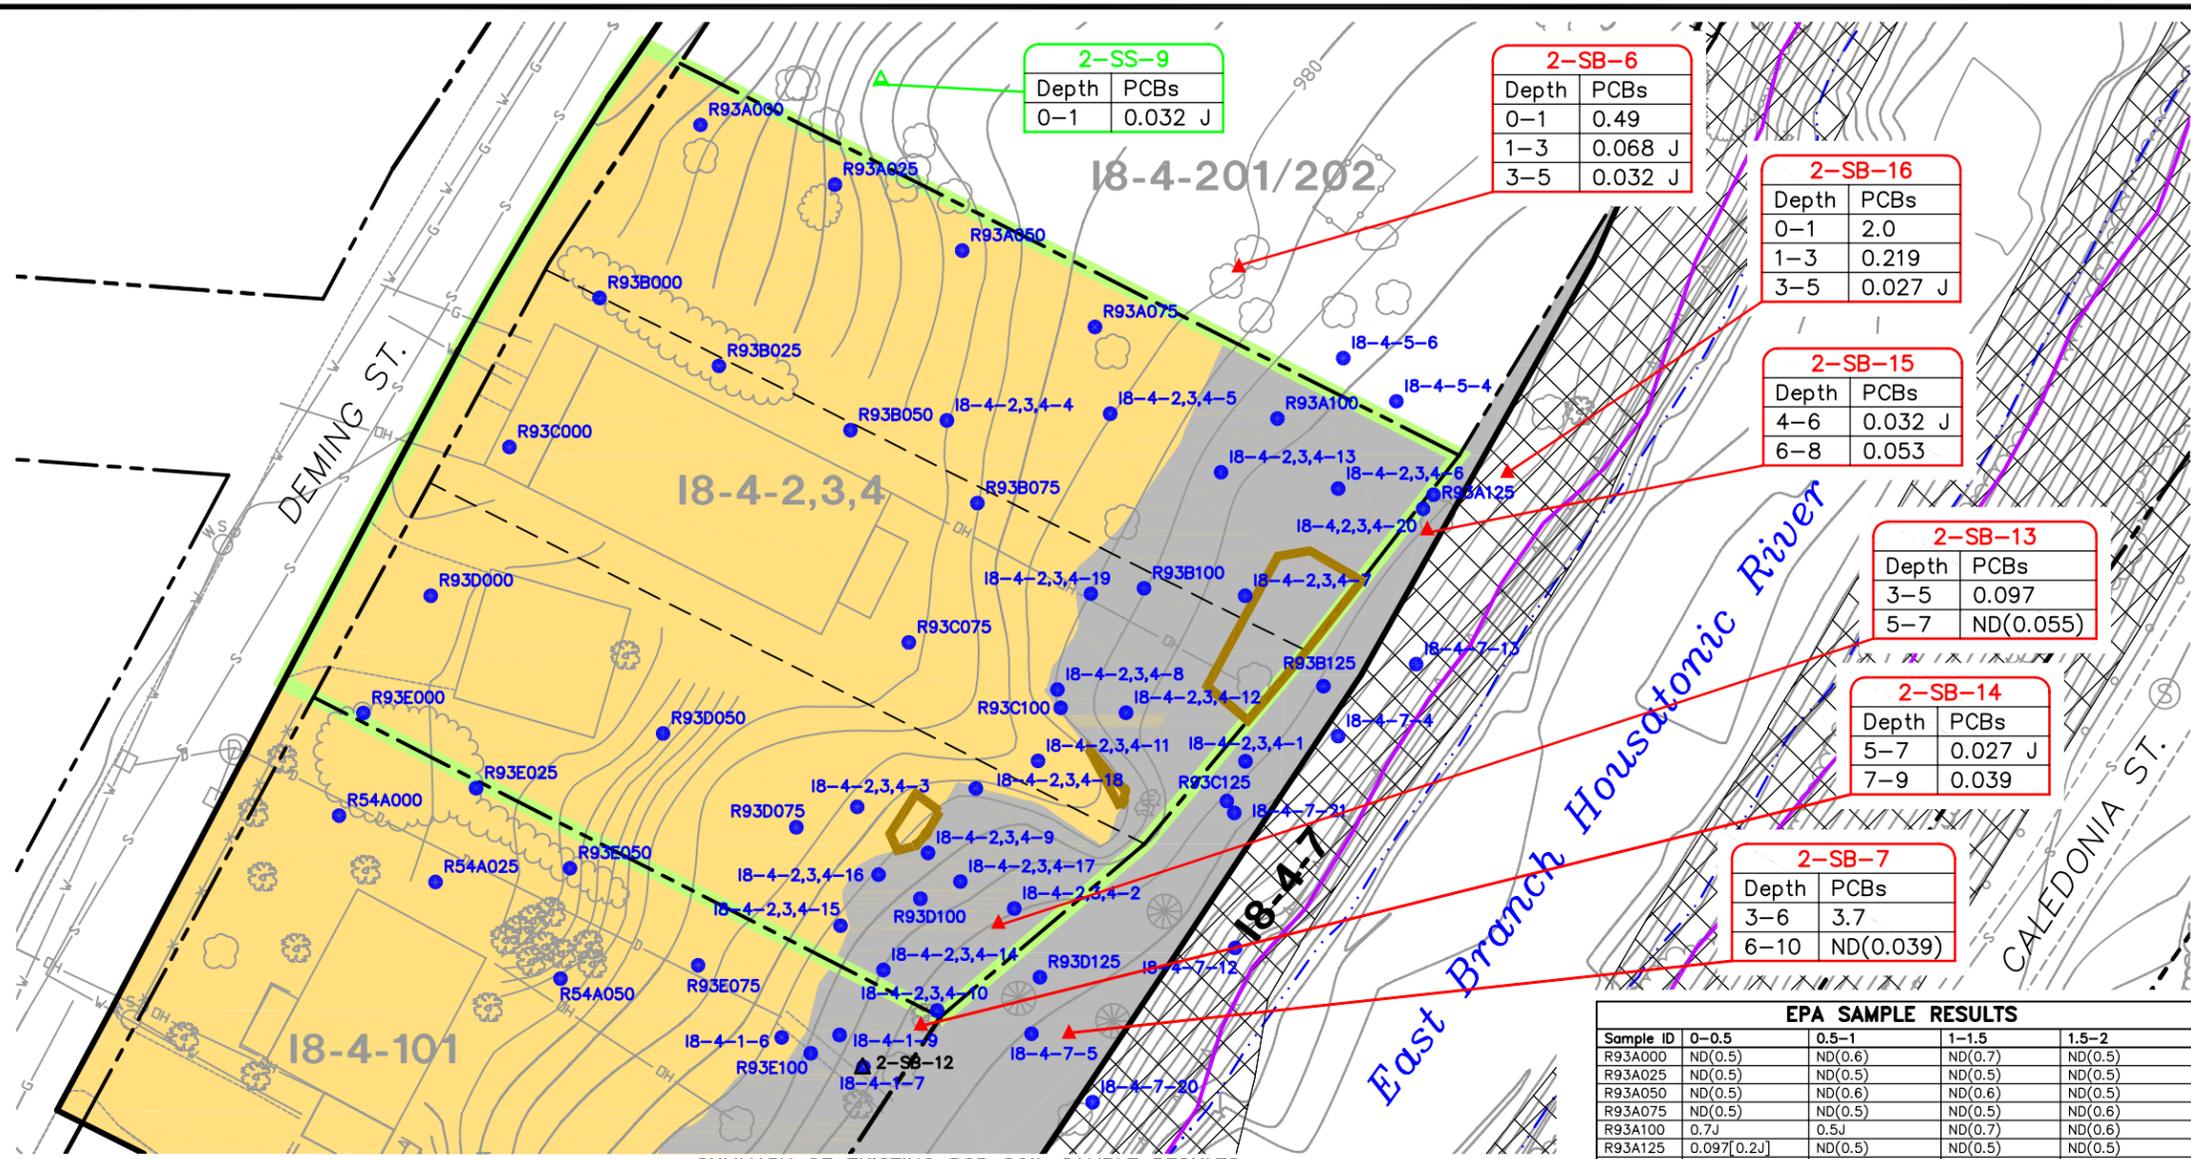

### LEGEND

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- RESIDENTIAL PROPERTY PARCEL ID
- NON-RESIDENTIAL PROPERTY PARCEL ID
- PRE-2000 SOIL BORING LOCATION
- PRE-DESIGN (2003) SURFACE SOIL SAMPLE LOCATION
- PRE-DESIGN (2003) SOIL BORING LOCATION
- PREVIOUSLY PROPOSED PCB AND APPENDIX IX+3 SOIL BORING LOCATION (ACCESS NOT OBTAINED)
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- AREA PROPOSED FOR SOIL REMOVAL

### SUMMARY OF EXISTING PCB SOIL SAMPLE RESULTS

(RESULTS ARE PRESENT AS DRY WEIGHT PARTS PER MILLION, PPM)  
(SAMPLE INCREMENTS IN FEET BELOW GROUND SURFACE)

Sample ID	0-0.5	0.5-1	1-1.5	1.5-2	2-2.5	2.5-3	3-3.5	3.5-4	4-4.5	4.5-5	5-5.5	5.5-6	6-6.5	6.5-7	7-7.5	7.5-8	8-8.5	8.5-9
18-4-2,3,4-1	53	130	211	28.9	31.9	14.5	12.4	1.84	3.12	0.829								
18-4-2,3,4-2	76	18	13.1	1.44	1.37	3.45												
18-4-2,3,4-3	0.64	0.25																
18-4-2,3,4-4	0.128	ND(0.1)																
18-4-2,3,4-5	0.716	0.462	0.349	0.146														
18-4-2,3,4-6	4.77	2.26	1.06	46.1	10.4	4.64	8.2	1.3	0.129	0.594								
18-4-2,3,4-7	21.6	17.4	6.9	9.8	10.3	4.48												
18-4-2,3,4-8	3.31	3.28	0.724	ND(0.1)														
18-4-2,3,4-9	31.2	75.5	30.4	3.33	3.54	4.87	0.18	3.85	0.563	1.23								
18-4-2,3,4-10	1,430[1,440]	2,250[1,420]	798	195	24.8	78.7	4.31[24.9]	28.5	1.19	4.91								
18-4-2,3,4-11	0.204[0.192]	0.327																
18-4-2,3,4-12	15.3[23.9]	1.32	0.408	0.116	1.17	0.5												
18-4-2,3,4-13	0.171	ND(0.1)	ND(0.1)	ND(0.1)														
18-4-2,3,4-14	1.96	0.708	ND(0.1)	ND(0.1)	0.112	ND(0.1)												
18-4-2,3,4-15	0.698[0.792]	0.193	ND(0.1)	ND(0.1)														
18-4-2,3,4-16	3.27	2.37	0.173															
18-4-2,3,4-17	38	6.41	1.12															
18-4-2,3,4-18	1.61	0.65	0.185															
18-4-2,3,4-19	5.68	3.12	ND(0.1)															
18-4-2,3,4-20	15.1	111	120	32.2	2.2	34.8	20.9	4.87										
18-4-1-6	0.838	1.47	0.853	0.676														
18-4-1-7	220	214	91.3	32.3	43.8	29.4	15.8	11.6	2.4	7.75								
18-4-1-9	3.11	4.18	1.17	0.435	0.408	0.356												
18-4-5-4	11.4[12.7]	10.7	0.281	22.1	1.34	ND(0.1)												
18-4-5-6	6.62[6.7]	0.909	0.292															
18-4-7-4	65.9[65.2]	85.7	279	360	524	183	16.5	83.2	11.5	2.47	13.5	3.22						
18-4-7-5	14.1[12.1]	667	354	1,110	704	241	4.5	42.5	19.2	25.8	60.8	11.9						
18-4-7-12	2.67	14.6	188	205[167]	100	38.7												
18-4-7-13	4.29	14.3	41.5	102	73.1	24.5												
18-4-7-20	12.7	92.4	58.1	42.6	340	28.3	108	57.4	1.81	0.392	0.611	ND(0.1)						
18-4-7-21	42.9	188	2,410	212	8.17	5.34	1.99	6.58	3.64	1.3	105	25	61.1	22.9	7.64	0.16	0.349	0.263

### EPA SAMPLE RESULTS

Sample ID	0-0.5	0.5-1	1-1.5	1.5-2
R93A000	ND(0.5)	ND(0.6)	ND(0.7)	ND(0.5)
R93A025	ND(0.5)	ND(0.5)	ND(0.5)	ND(0.5)
R93A050	ND(0.5)	ND(0.6)	ND(0.6)	ND(0.5)
R93A075	ND(0.5)	ND(0.5)	ND(0.5)	ND(0.6)
R93A100	0.7J	0.5J	ND(0.7)	ND(0.6)
R93A125	0.097[0.2J]	ND(0.5)	ND(0.5)	ND(0.5)
R93B000	10J	1.4J	0.3J	ND(0.6)
R93B025	1J	ND(0.5)	ND(0.6)	ND(0.5)
R93B050	0.5J	ND(0.5)	ND(0.5)	ND(0.5)
R93B075	0.4J	ND(0.6)[0.028J]	ND(0.6)	ND(0.6)
R93B100	ND(0.5)	ND(0.5)	ND(0.5)	ND(0.5)
R93B125	27J	76J	53J	8.2J
R93C000	6.6J	0.3J	ND(0.5)	ND(0.6)
R93C075	1.5J	ND(0.8)	ND(0.6)	ND(0.5)
R93C100	ND(0.6)	ND(0.7)	0.062[ND(0.6)]	ND(0.7)
R93C125	ND(0.6)	ND(0.5)	ND(0.5)	ND(0.5)
R93D000	ND(0.5)	ND(0.5)	ND(0.6)	ND(0.5)
R93D050	ND(0.6)	ND(0.5)	ND(0.5)	ND(0.6)
R93D075	0.4J	ND(0.5)	ND(0.6)	ND(0.6)
R93D100	ND(0.5)	ND(0.5)	ND(0.5)	ND(0.034)[ND(0.5)]
R93D125	ND(0.5)	ND(0.5)	ND(0.6)	0.6J
R93E000	ND(0.6)	ND(0.5)	ND(0.6)	ND(0.5)
R93E025	ND(0.6)	ND(0.5)	ND(0.6)	ND(0.6)
R93E050	0.029J[ND(0.5)]	ND(0.6)	ND(0.6)	ND(0.5)
R93E075	0.6J	ND(0.6)	ND(0.5)	ND(0.6)
R93E100	ND(0.6)	ND(0.5)	ND(0.5)	ND(0.5)

Notes to Tables:

A. Sample data obtained from EPA database titled 040403\_usepa\_hr\_base1.mdb and GE database titled hr040903.mdb.

B. J - Indicates estimated value less than the CLP-required quantitation limit.

C. --- - Indicates sample interval was not analyzed.

D. Duplicate results presented in brackets.

E. Shading indicates soil was removed at this depth and clean backfill was placed at these locations.

### NOTES TO FIGURE:

- THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
- THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
- PCB CONCENTRATIONS ARE REPORTED AS DRY WEIGHT PARTS PER MILLION, PPM.
- SAMPLE LOCATIONS ARE APPROXIMATE.

0 30' 60'

GRAPHIC SCALE

GENERAL ELECTRIC COMPANY  
PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PCB SOIL SAMPLE LOCATIONS/RESULTS  
AND PROPOSED SOIL REMOVAL -  
PARCELS 18-4-2, -3, -4**

**BBL**  
an ARCADIS company

FIGURE  
**5**



# *Appendices*

---

## *Appendix A*

---

# **PCB Spatial Averaging Evaluation Tables and Polygon Maps**

---

# Parcels I8-4-201/202

**TABLE A-1  
EXISTING CONDITIONS  
PARCELS I8-4-201/202: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**0- TO 0.5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	106	601	0 - 0.5	1.19	11.12	1.19	13.23
2-SB-2	108	1,024	0 - 0.5	0.06	18.96	0.06	1.14
2-SB-3	105	376	0 - 0.5	6.1	6.97	6.10	42.51
2-SB-4	113	725	0 - 0.5	0.44	13.42	0.44	5.90
2-SB-5	111	283	0 - 0.5	2.33	5.24	2.33	12.22
2-SB-6	115	651	0 - 0.5	0.49	12.05	0.49	5.91
2-SB-16	122	3	0 - 0.5	2	0.05	2.00	0.10
2-SS-1	104	2,936	0 - 0.5	0.51	54.38	0.51	27.73
2-SS-2	107	915	0 - 0.5	0.04	16.95	0.04	0.68
2-SS-3	116	182	0 - 0.5	1.2	3.37	1.20	4.05
2-SS-4	110	536	0 - 0.5	0.43	9.93	0.43	4.27
2-SS-5	103	2,709	0 - 0.5	0.036	50.17	0.04	1.81
2-SS-6	109	1,060	0 - 0.5	0.144	19.64	0.14	2.83
2-SS-7	117	211	0 - 0.5	3.6	3.90	3.60	14.06
2-SS-8	118	193	0 - 0.5	35	3.58	35.00	125.23
2-SS-9	102	1,665	0 - 0.5	0.032	30.83	0.03	0.99
2-SS-10	112	588	0 - 0.5	0.12	10.88	0.12	1.31
2-SS-11	114	579	0 - 0.5	0.212	10.73	0.21	2.27
2-SS-12	119	19	0 - 0.5	50	0.36	50.00	17.93
I8-4-5-1	88	333	0 - 0.5	0.48	6.18	0.48	2.96
I8-4-5-2	92	186	0 - 0.5	0.13	3.44	0.13	0.45
I8-4-5-3	93	1,570	0 - 0.5	0.19	29.07	0.19	5.52
I8-4-5-4	94	135	0 - 0.5	12.05	2.49	12.05	30.05
I8-4-5-5	95	228	0 - 0.5	0.343	4.23	0.34	1.45
I8-4-5-6	96	275	0 - 0.5	6.66	5.09	6.66	33.88
I8-4-5-7	97	173	0 - 0.5	3.08	3.20	3.08	9.85
I8-4-5-8	98	131	0 - 0.5	14.5	2.42	14.50	35.06
I8-4-5-9	99	142	0 - 0.5	1.59	2.64	1.59	4.19
I8-4-5-10	89	263	0 - 0.5	0.188	4.87	0.19	0.92
I8-4-5-11	90	237	0 - 0.5	0.05	4.40	0.05	0.22
I8-4-5-12	91	251	0 - 0.5	0.498	4.64	0.50	2.31
I8-4-7-15	120	1	0 - 0.5	9.5	0.01	9.50	0.09
R55C000	100	513	0 - 0.5	0.3	9.50	0.30	2.85
R55C025	101	668	0 - 0.5	0.3	12.38	0.30	3.71
R55C050	129	541	0 - 0.5	0.3	10.01	0.30	3.00
R55C075	130	327	0 - 0.5	0.1825	6.06	0.18	1.11
R55C100	131	370	0 - 0.5	0.25	6.85	0.25	1.71
R93A000	128	398	0 - 0.5	0.25	7.38	0.25	1.84
R93A025	127	72	0 - 0.5	0.25	1.34	0.25	0.33
R93A050	126	427	0 - 0.5	0.25	7.92	0.25	1.98
R93A075	125	208	0 - 0.5	0.25	3.85	0.25	0.96
R93A100	124	13	0 - 0.5	0.7	0.24	0.70	0.17
R93A125	123	8	0 - 0.5	0.1485	0.15	0.15	0.02
<b>Totals:</b>	--	22,727	--	--	420.86	--	428.81
<b>Volume Weighted Average:</b>							<b>1.02</b>

**0.5- TO 1-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	106	813	0.5 - 1	1.19	15.06	1.19	17.92
2-SB-2	108	1,024	0.5 - 1	0.06	18.96	0.06	1.14
2-SB-3	105	376	0.5 - 1	6.1	6.97	6.10	42.51
2-SB-4	113	725	0.5 - 1	0.44	13.42	0.44	5.90
2-SB-5	111	283	0.5 - 1	2.33	5.24	2.33	12.22

**TABLE A-1  
EXISTING CONDITIONS  
PARCELS I8-4-201/202: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**0.5- TO 1-FOOT DEPTH INCREMENT CONTINUED**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	115	651	0.5 - 1	0.49	12.05	0.49	5.91
2-SB-16	122	3	0.5 - 1	2	0.05	2.00	0.10
2-SS-1	104	2,936	0.5 - 1	0.51	54.38	0.51	27.73
2-SS-2	107	970	0.5 - 1	0.04	17.96	0.04	0.72
2-SS-3	116	182	0.5 - 1	1.2	3.37	1.20	4.05
2-SS-4	110	536	0.5 - 1	0.43	9.93	0.43	4.27
2-SS-5	103	2,709	0.5 - 1	0.036	50.17	0.04	1.81
2-SS-6	109	1,060	0.5 - 1	0.144	19.64	0.14	2.83
2-SS-7	117	211	0.5 - 1	3.6	3.90	3.60	14.06
2-SS-8	118	193	0.5 - 1	35	3.58	35.00	125.23
2-SS-9	102	1,665	0.5 - 1	0.032	30.83	0.03	0.99
2-SS-10	112	588	0.5 - 1	0.12	10.88	0.12	1.31
2-SS-11	114	579	0.5 - 1	0.212	10.73	0.21	2.27
2-SS-12	119	19	0.5 - 1	50	0.36	50.00	17.93
I8-4-5-1	88	333	0.5 - 1	0.63	6.18	0.63	3.89
I8-4-5-2	92	186	0.5 - 1	0.61	3.44	0.61	2.10
I8-4-5-3	93	1,570	0.5 - 1	0.28	29.07	0.28	8.14
I8-4-5-4	94	135	0.5 - 1	10.7	2.49	10.70	26.68
I8-4-5-5	95	228	0.5 - 1	0.266	4.23	0.27	1.12
I8-4-5-6	96	275	0.5 - 1	0.909	5.09	0.91	4.62
I8-4-5-7	97	173	0.5 - 1	7.55	3.20	7.55	24.15
I8-4-5-8	98	131	0.5 - 1	1.37	2.42	1.37	3.31
I8-4-5-9	99	142	0.5 - 1	5.28	2.64	5.28	13.92
I8-4-5-10	89	263	0.5 - 1	<b>0.05</b>	4.87	0.05	0.24
I8-4-5-11	90	237	0.5 - 1	<b>0.05</b>	4.40	0.05	0.22
I8-4-5-12	91	251	0.5 - 1	2.19	4.64	2.19	10.17
I8-4-7-15	120	1	0.5 - 1	244	0.01	244.00	2.43
R55C000	100	513	0.5 - 1	0.2	9.50	0.20	1.90
R55C025	101	668	0.5 - 1	<b>0.25</b>	12.38	0.25	3.09
R55C050	129	541	0.5 - 1	<b>0.25</b>	10.01	0.25	2.50
R55C075	130	430	0.5 - 1	<b>0.25</b>	7.96	0.25	1.99
R93A000	128	398	0.5 - 1	<b>0.3</b>	7.38	0.30	2.21
R93A025	127	72	0.5 - 1	<b>0.25</b>	1.34	0.25	0.33
R93A050	126	427	0.5 - 1	<b>0.3</b>	7.92	0.30	2.37
R93A075	125	208	0.5 - 1	<b>0.25</b>	3.85	0.25	0.96
R93A100	124	13	0.5 - 1	0.5	0.24	0.50	0.12
R93A125	123	8	0.5 - 1	<b>0.25</b>	0.15	0.25	0.04
<b>Totals:</b>	--	22,726	--	--	420.86	--	405.42
<b>Volume Weighted Average:</b>							<b>0.96</b>

**SUMMARY - 0- TO 1-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	22,726	--	--	841.72	--	834.23
<b>Volume Weighted Average:</b>							<b>0.99</b>

**Notes:**

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.

**TABLE A-2  
EXISTING CONDITIONS  
PARCELS I8-4-201/202: 1- TO X-FOOT (X=7) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

1- TO 1.5-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	59	1,484	1 - 1.5	5.4	27.49	5.40	148.43
2-SB-2	60	2,853	1 - 1.5	0.39	52.84	0.39	20.61
2-SB-3	58	1,406	1 - 1.5	0.18	26.03	0.18	4.69
2-SB-4	62	3,951	1 - 1.5	0.1	73.16	0.10	7.32
2-SB-5	61	861	1 - 1.5	2.035	15.95	2.04	32.45
2-SB-6	69A	1,263	1 - 1.5	0.068	23.38	0.07	1.59
2-SB-16	66	3	1 - 1.5	0.219	0.05	0.22	0.01
I8-4-5-4	51	152	1 - 1.5	0.281	2.82	0.28	0.79
I8-4-5-6	52	352	1 - 1.5	0.292	6.51	0.29	1.90
I8-4-5-7	53	239	1 - 1.5	6.26	4.43	6.26	27.70
I8-4-5-8	54	234	1 - 1.5	0.148	4.34	0.15	0.64
I8-4-5-9	55	214	1 - 1.5	0.773	3.96	0.77	3.06
I8-4-5-12	50	458	1 - 1.5	2.43	8.49	2.43	20.62
I8-4-7-15	64	1	1 - 1.5	11.4	0.01	11.40	0.11
I8-4-7-16	63	18	1 - 1.5	5.08	0.33	5.08	1.68
R55C000	56	1,316	1 - 1.5	<b>0.25</b>	24.37	0.25	6.09
R55C025	57	2,151	1 - 1.5	<b>0.25</b>	39.84	0.25	9.96
R55C050	73	662	1 - 1.5	<b>0.3</b>	12.26	0.30	3.68
R55C075	74	775	1 - 1.5	<b>0.25</b>	14.35	0.25	3.59
R93A000	72	1,518	1 - 1.5	<b>0.35</b>	28.10	0.35	9.84
R93A025	71	1,626	1 - 1.5	<b>0.25</b>	30.12	0.25	7.53
R93A050	70	961	1 - 1.5	<b>0.3</b>	17.80	0.30	5.34
R93A075	69	208	1 - 1.5	<b>0.25</b>	3.85	0.25	0.96
R93A100	68	13	1 - 1.5	<b>0.35</b>	0.24	0.35	0.08
R93A125	67	8	1 - 1.5	<b>0.25</b>	0.15	0.25	0.04
<b>Totals:</b>	--	22,727	--	--	420.86	--	318.72
<b>Volume Weighted Average:</b>							<b>0.76</b>

1.5- TO 2-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	59	1,484	1.5 - 2	5.4	27.49	5.40	148.43
2-SB-2	60	2,853	1.5 - 2	0.39	52.84	0.39	20.61
2-SB-3	58	1,406	1.5 - 2	0.18	26.03	0.18	4.69
2-SB-4	62	3,951	1.5 - 2	0.1	73.16	0.10	7.32
2-SB-5	61	895	1.5 - 2	2.035	16.57	2.04	33.72
2-SB-6	69A	1,342	1.5 - 2	0.068	24.86	0.07	1.69
2-SB-16	66	3	1.5 - 2	0.219	0.05	0.22	0.01
I8-4-5-4	51	326	1.5 - 2	22.1	6.03	22.10	133.34
I8-4-5-7	53	239	1.5 - 2	0.787	4.43	0.79	3.48
I8-4-5-8	54	234	1.5 - 2	0.258	4.34	0.26	1.12
I8-4-5-9	55	216	1.5 - 2	0.512	4.00	0.51	2.05
I8-4-5-12	50	458	1.5 - 2	0.413	8.49	0.41	3.51
I8-4-7-15	64	1	1.5 - 2	3.92	0.01	3.92	0.04
I8-4-7-16	63	18	1.5 - 2	1.64	0.33	1.64	0.54
R55C000	56	1,316	1.5 - 2	<b>0.25</b>	24.37	0.25	6.09
R55C025	57	2,151	1.5 - 2	<b>0.15</b>	39.84	0.15	5.98
R55C050	73	662	1.5 - 2	<b>0.35</b>	12.26	0.35	4.29
R55C075	74	775	1.5 - 2	0.3	14.35	0.30	4.31

**TABLE A-2  
EXISTING CONDITIONS  
PARCELS I8-4-201/202: 1- TO X-FOOT (X=7) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

1.5- TO 2-FOOT DEPTH INCREMENT CONTINUED

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
R93A000	72	1,518	1.5 - 2	0.25	28.10	0.25	7.03
R93A025	71	1,626	1.5 - 2	0.25	30.12	0.25	7.53
R93A050	70	961	1.5 - 2	0.25	17.80	0.25	4.45
R93A075	69	208	1.5 - 2	0.3	3.85	0.30	1.15
R93A100	68	76	1.5 - 2	0.3	1.41	0.30	0.42
R93A125	67	8	1.5 - 2	0.25	0.15	0.25	0.04
<b>Totals:</b>	--	22,727	--	--	420.87	--	401.82
<b>Volume Weighted Average:</b>							<b>0.95</b>

2- TO 2.5-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	32	1,897	2 - 2.5	5.4	35.14	5.40	189.73
2-SB-2	33	7,083	2 - 2.5	0.39	131.16	0.39	51.15
2-SB-3	31	1,406	2 - 2.5	0.18	26.03	0.18	4.69
2-SB-4	35	5,598	2 - 2.5	0.1	103.67	0.10	10.37
2-SB-5	34	995	2 - 2.5	2.035	18.43	2.04	37.50
2-SB-6	36	4,307	2 - 2.5	0.068	79.76	0.07	5.42
2-SB-16	40	18	2 - 2.5	0.219	0.33	0.22	0.07
I8-4-5-4	29	512	2 - 2.5	1.34	9.48	1.34	12.70
I8-4-5-7	30	311	2 - 2.5	5.04	5.75	5.04	29.00
I8-4-5-12	28	458	2 - 2.5	0.629	8.49	0.63	5.34
I8-4-7-15	38	30	2 - 2.5	7.69	0.55	7.69	4.22
I8-4-7-16	37	18	2 - 2.5	1.22	0.33	1.22	0.40
I8-4-7-22	39	94	2 - 2.5	700	1.74	700.00	1,216.69
<b>Totals:</b>	--	22,727	--	--	420.86	--	1,567.28
<b>Volume Weighted Average:</b>							<b>3.72</b>

2.5- TO 3-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	32	1,897	2.5 - 3	5.4	35.14	5.40	189.73
2-SB-2	33	7,083	2.5 - 3	0.39	131.16	0.39	51.15
2-SB-3	31	1,514	2.5 - 3	0.18	28.04	0.18	5.05
2-SB-4	35	5,600	2.5 - 3	0.1	103.70	0.10	10.37
2-SB-5	34	1,013	2.5 - 3	2.035	18.76	2.04	38.18
2-SB-6	36	4,307	2.5 - 3	0.068	79.76	0.07	5.42
2-SB-16	40	18	2.5 - 3	0.219	0.33	0.22	0.07
I8-4-5-4	29	512	2.5 - 3	0.05	9.48	0.05	0.47
I8-4-5-7	30	537	2.5 - 3	0.05	9.94	0.05	0.50
I8-4-7-15	38	30	2.5 - 3	6.24	0.55	6.24	3.42
I8-4-7-16	37	122	2.5 - 3	0.324	2.25	0.32	0.73
I8-4-7-22	39	94	2.5 - 3	6.8	1.74	6.80	11.82
<b>Totals:</b>	--	22,726	--	--	420.86	--	316.92
<b>Volume Weighted Average:</b>							<b>0.75</b>

**TABLE A-2  
EXISTING CONDITIONS  
PARCELS I8-4-201/202: 1- TO X-FOOT (X=7) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**3- TO 4-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	17	1,897	3 - 4	1.44	70.27	1.44	101.19
2-SB-2	18	7,083	3 - 4	1.16	262.33	1.16	304.30
2-SB-3	16	1,701	3 - 4	<b>0.0225</b>	63.00	0.02	1.42
2-SB-4	20	5,600	3 - 4	<b>0.0195</b>	207.41	0.02	4.04
2-SB-5	19	1,667	3 - 4	<b>0.023</b>	61.72	0.02	1.42
2-SB-6	21	4,384	3 - 4	0.032	162.37	0.03	5.20
2-SB-16	22	237	3 - 4	0.027	8.76	0.03	0.24
I8-4-2,3,4-6	23	158	3 - 3.5	8.2	5.86	4.75	27.85
			3.5 - 4	1.3			
<b>Totals:</b>	--	22,727	--	--	841.73	--	445.66
<b>Volume Weighted Average:</b>							<b>0.53</b>

**4- TO 5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	19	1,897	4 - 5	0.44	70.27	0.44	30.92
2-SB-2	20	7,083	4 - 5	0.16	262.33	0.16	41.97
2-SB-3	18	1,701	4 - 5	<b>0.0225</b>	63.00	0.02	1.42
2-SB-4	22	5,600	4 - 5	<b>0.0195</b>	207.41	0.02	4.04
2-SB-5	21	1,667	4 - 5	<b>0.023</b>	61.72	0.02	1.42
2-SB-6	23	4,384	4 - 5	0.032	162.37	0.03	5.20
2-SB-16	24	237	4 - 5	0.027	8.76	0.03	0.24
I8-4-2,3,4-6	26	158	4 - 4.5	0.129	5.86	0.36	2.12
			4.5 - 5	0.594			
<b>Totals:</b>	--	22,727	--	--	841.73	--	87.33
<b>Volume Weighted Average:</b>							<b>0.10</b>

**5- TO 7-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	6	2,137	5 - 6	<b>0.032</b>	79.13	0.03	2.53
2-SB-2	7	15,952	5 - 6	<b>0.0195</b>	590.82	0.02	11.52
2-SB-15*	8	4,638	5 - 6	0.032	343.56	0.04	14.60
			6 - 7	0.053			
<b>Totals:</b>	--	22,727	--	--	1,013.51	--	28.65
<b>Volume Weighted Average:</b>							<b>0.03</b>

**SUMMARY - 1- TO X-FOOT (X=7) DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	22,727	--	--	4,380.42	--	3,166.39
<b>Volume Weighted Average:</b>							<b>0.72</b>

**Notes:**

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.
4. \* - The existing sample depth increment for this location is 6 to 8 feet.

**TABLE A-3  
POST-REMEDATION CONDITIONS  
PARCELS I8-4-201/202: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**0- TO 0.5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	106	601	0 - 0.5	1.19	11.12	1.19	13.23
2-SB-2	108	1,024	0 - 0.5	0.06	18.96	0.06	1.14
2-SB-3	105	376	0 - 0.5	6.1	6.97	6.10	42.51
2-SB-4	113	725	0 - 0.5	0.44	13.42	0.44	5.90
2-SB-5	111	283	0 - 0.5	2.33	5.24	2.33	12.22
2-SB-6	115	651	0 - 0.5	0.49	12.05	0.49	5.91
2-SB-16	122	3	0 - 0.5	2	0.05	2.00	0.10
2-SS-1	104	2,936	0 - 0.5	0.51	54.38	0.51	27.73
2-SS-2	107	915	0 - 0.5	0.04	16.95	0.04	0.68
2-SS-3	116	182	0 - 0.5	1.2	3.37	1.20	4.05
2-SS-4	110	536	0 - 0.5	0.43	9.93	0.43	4.27
2-SS-5	103	2,709	0 - 0.5	0.036	50.17	0.04	1.81
2-SS-6	109	1,060	0 - 0.5	0.144	19.64	0.14	2.83
2-SS-7	117	211	0 - 0.5	3.6	3.90	3.60	14.06
2-SS-8	118	193	0 - 0.5	35	3.58	35.00	125.23
2-SS-9	102	1,665	0 - 0.5	0.032	30.83	0.03	0.99
2-SS-10	112	588	0 - 0.5	0.12	10.88	0.12	1.31
2-SS-11	114	579	0 - 0.5	0.212	10.73	0.21	2.27
2-SS-12	119	19	0 - 0.5	50	0.36	50.00	17.93
I8-4-5-1	88	333	0 - 0.5	0.48	6.18	0.48	2.96
I8-4-5-2	92	186	0 - 0.5	0.13	3.44	0.13	0.45
I8-4-5-3	93	1,570	0 - 0.5	0.19	29.07	0.19	5.52
I8-4-5-4	94	135	0 - 0.5	0.021	2.49	0.02	0.05
I8-4-5-5	95	228	0 - 0.5	0.343	4.23	0.34	1.45
I8-4-5-6	96	275	0 - 0.5	6.66	5.09	6.66	33.88
I8-4-5-7	97	173	0 - 0.5	3.08	3.20	3.08	9.85
I8-4-5-8	98	131	0 - 0.5	0.021	2.42	0.02	0.05
I8-4-5-9	99	142	0 - 0.5	1.59	2.64	1.59	4.19
I8-4-5-10	89	263	0 - 0.5	0.188	4.87	0.19	0.92
I8-4-5-11	90	237	0 - 0.5	0.05	4.40	0.05	0.22
I8-4-5-12	91	251	0 - 0.5	0.498	4.64	0.50	2.31
I8-4-7-15	120	1	0 - 0.5	9.5	0.01	9.50	0.09
R55C000	100	513	0 - 0.5	0.3	9.50	0.30	2.85
R55C025	101	668	0 - 0.5	0.3	12.38	0.30	3.71
R55C050	129	541	0 - 0.5	0.3	10.01	0.30	3.00
R55C075	130	327	0 - 0.5	0.1825	6.06	0.18	1.11
R55C100	131	370	0 - 0.5	0.25	6.85	0.25	1.71
R93A000	128	398	0 - 0.5	0.25	7.38	0.25	1.84
R93A025	127	72	0 - 0.5	0.25	1.34	0.25	0.33
R93A050	126	427	0 - 0.5	0.25	7.92	0.25	1.98
R93A075	125	208	0 - 0.5	0.25	3.85	0.25	0.96
R93A100	124	13	0 - 0.5	0.7	0.24	0.70	0.17
R93A125	123	8	0 - 0.5	0.1485	0.15	0.15	0.02
<b>Totals:</b>	--	22,727	--	--	420.86	--	363.80
<b>Volume Weighted Average:</b>							<b>0.86</b>

**0.5- TO 1-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-1	106	813	0.5 - 1	1.19	15.06	1.19	17.92
2-SB-2	108	1,024	0.5 - 1	0.06	18.96	0.06	1.14
2-SB-3	105	376	0.5 - 1	6.1	6.97	6.10	42.51
2-SB-4	113	725	0.5 - 1	0.44	13.42	0.44	5.90
2-SB-5	111	283	0.5 - 1	2.33	5.24	2.33	12.22

**TABLE A-3  
POST-REMEDATION CONDITIONS  
PARCELS I8-4-201/202: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**0.5- TO 1-FOOT DEPTH INCREMENT CONTINUED**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	115	651	0.5 - 1	0.49	12.05	0.49	5.91
2-SB-16	122	3	0.5 - 1	2	0.05	2.00	0.10
2-SS-1	104	2,936	0.5 - 1	0.51	54.38	0.51	27.73
2-SS-2	107	970	0.5 - 1	0.04	17.96	0.04	0.72
2-SS-3	116	182	0.5 - 1	1.2	3.37	1.20	4.05
2-SS-4	110	536	0.5 - 1	0.43	9.93	0.43	4.27
2-SS-5	103	2,709	0.5 - 1	0.036	50.17	0.04	1.81
2-SS-6	109	1,060	0.5 - 1	0.144	19.64	0.14	2.83
2-SS-7	117	211	0.5 - 1	3.6	3.90	3.60	14.06
2-SS-8	118	193	0.5 - 1	35	3.58	35.00	125.23
2-SS-9	102	1,665	0.5 - 1	0.032	30.83	0.03	0.99
2-SS-10	112	588	0.5 - 1	0.12	10.88	0.12	1.31
2-SS-11	114	579	0.5 - 1	0.212	10.73	0.21	2.27
2-SS-12	119	19	0.5 - 1	50	0.36	50.00	17.93
I8-4-5-1	88	333	0.5 - 1	0.63	6.18	0.63	3.89
I8-4-5-2	92	186	0.5 - 1	0.61	3.44	0.61	2.10
I8-4-5-3	93	1,570	0.5 - 1	0.28	29.07	0.28	8.14
I8-4-5-4	94	135	0.5 - 1	<b>0.021</b>	2.49	0.02	0.05
I8-4-5-5	95	228	0.5 - 1	0.266	4.23	0.27	1.12
I8-4-5-6	96	275	0.5 - 1	0.909	5.09	0.91	4.62
I8-4-5-7	97	173	0.5 - 1	7.55	3.20	7.55	24.15
I8-4-5-8	98	131	0.5 - 1	<b>0.021</b>	2.42	0.02	0.05
I8-4-5-9	99	142	0.5 - 1	5.28	2.64	5.28	13.92
I8-4-5-10	89	263	0.5 - 1	<b>0.05</b>	4.87	0.05	0.24
I8-4-5-11	90	237	0.5 - 1	<b>0.05</b>	4.40	0.05	0.22
I8-4-5-12	91	251	0.5 - 1	2.19	4.64	2.19	10.17
I8-4-7-15	120	1	0.5 - 1	244	0.01	244.00	2.43
R55C000	100	513	0.5 - 1	0.2	9.50	0.20	1.90
R55C025	101	668	0.5 - 1	<b>0.25</b>	12.38	0.25	3.09
R55C050	129	541	0.5 - 1	<b>0.25</b>	10.01	0.25	2.50
R55C075	130	430	0.5 - 1	<b>0.25</b>	7.96	0.25	1.99
R93A000	128	398	0.5 - 1	<b>0.3</b>	7.38	0.30	2.21
R93A025	127	72	0.5 - 1	<b>0.25</b>	1.34	0.25	0.33
R93A050	126	427	0.5 - 1	<b>0.3</b>	7.92	0.30	2.37
R93A075	125	208	0.5 - 1	<b>0.25</b>	3.85	0.25	0.96
R93A100	124	13	0.5 - 1	0.5	0.24	0.50	0.12
R93A125	123	8	0.5 - 1	<b>0.25</b>	0.15	0.25	0.04
<b>Totals:</b>	--	22,726	--	--	420.86	--	375.53
<b>Volume Weighted Average:</b>							<b>0.89</b>

**SUMMARY - 0- TO 1-FOOT DEPTH INCREMENT**


Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	22,726	--	--	841.72	--	739.33
<b>Volume Weighted Average:</b>							<b>0.88</b>

Notes:

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.

SYR-85-NES-KLS-DMW L: ON=\*\* OFF=REF\* G:\GE\_ACTIVE\N\_40122004 PHASE2\_ADDENDUM\_40122624.DWG SAVED: 12/11/2006 10:58 AM LAYOUT: Layout1 PAGES: 1 OF 1 PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:18 PM BY: DWODARCZYK

PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

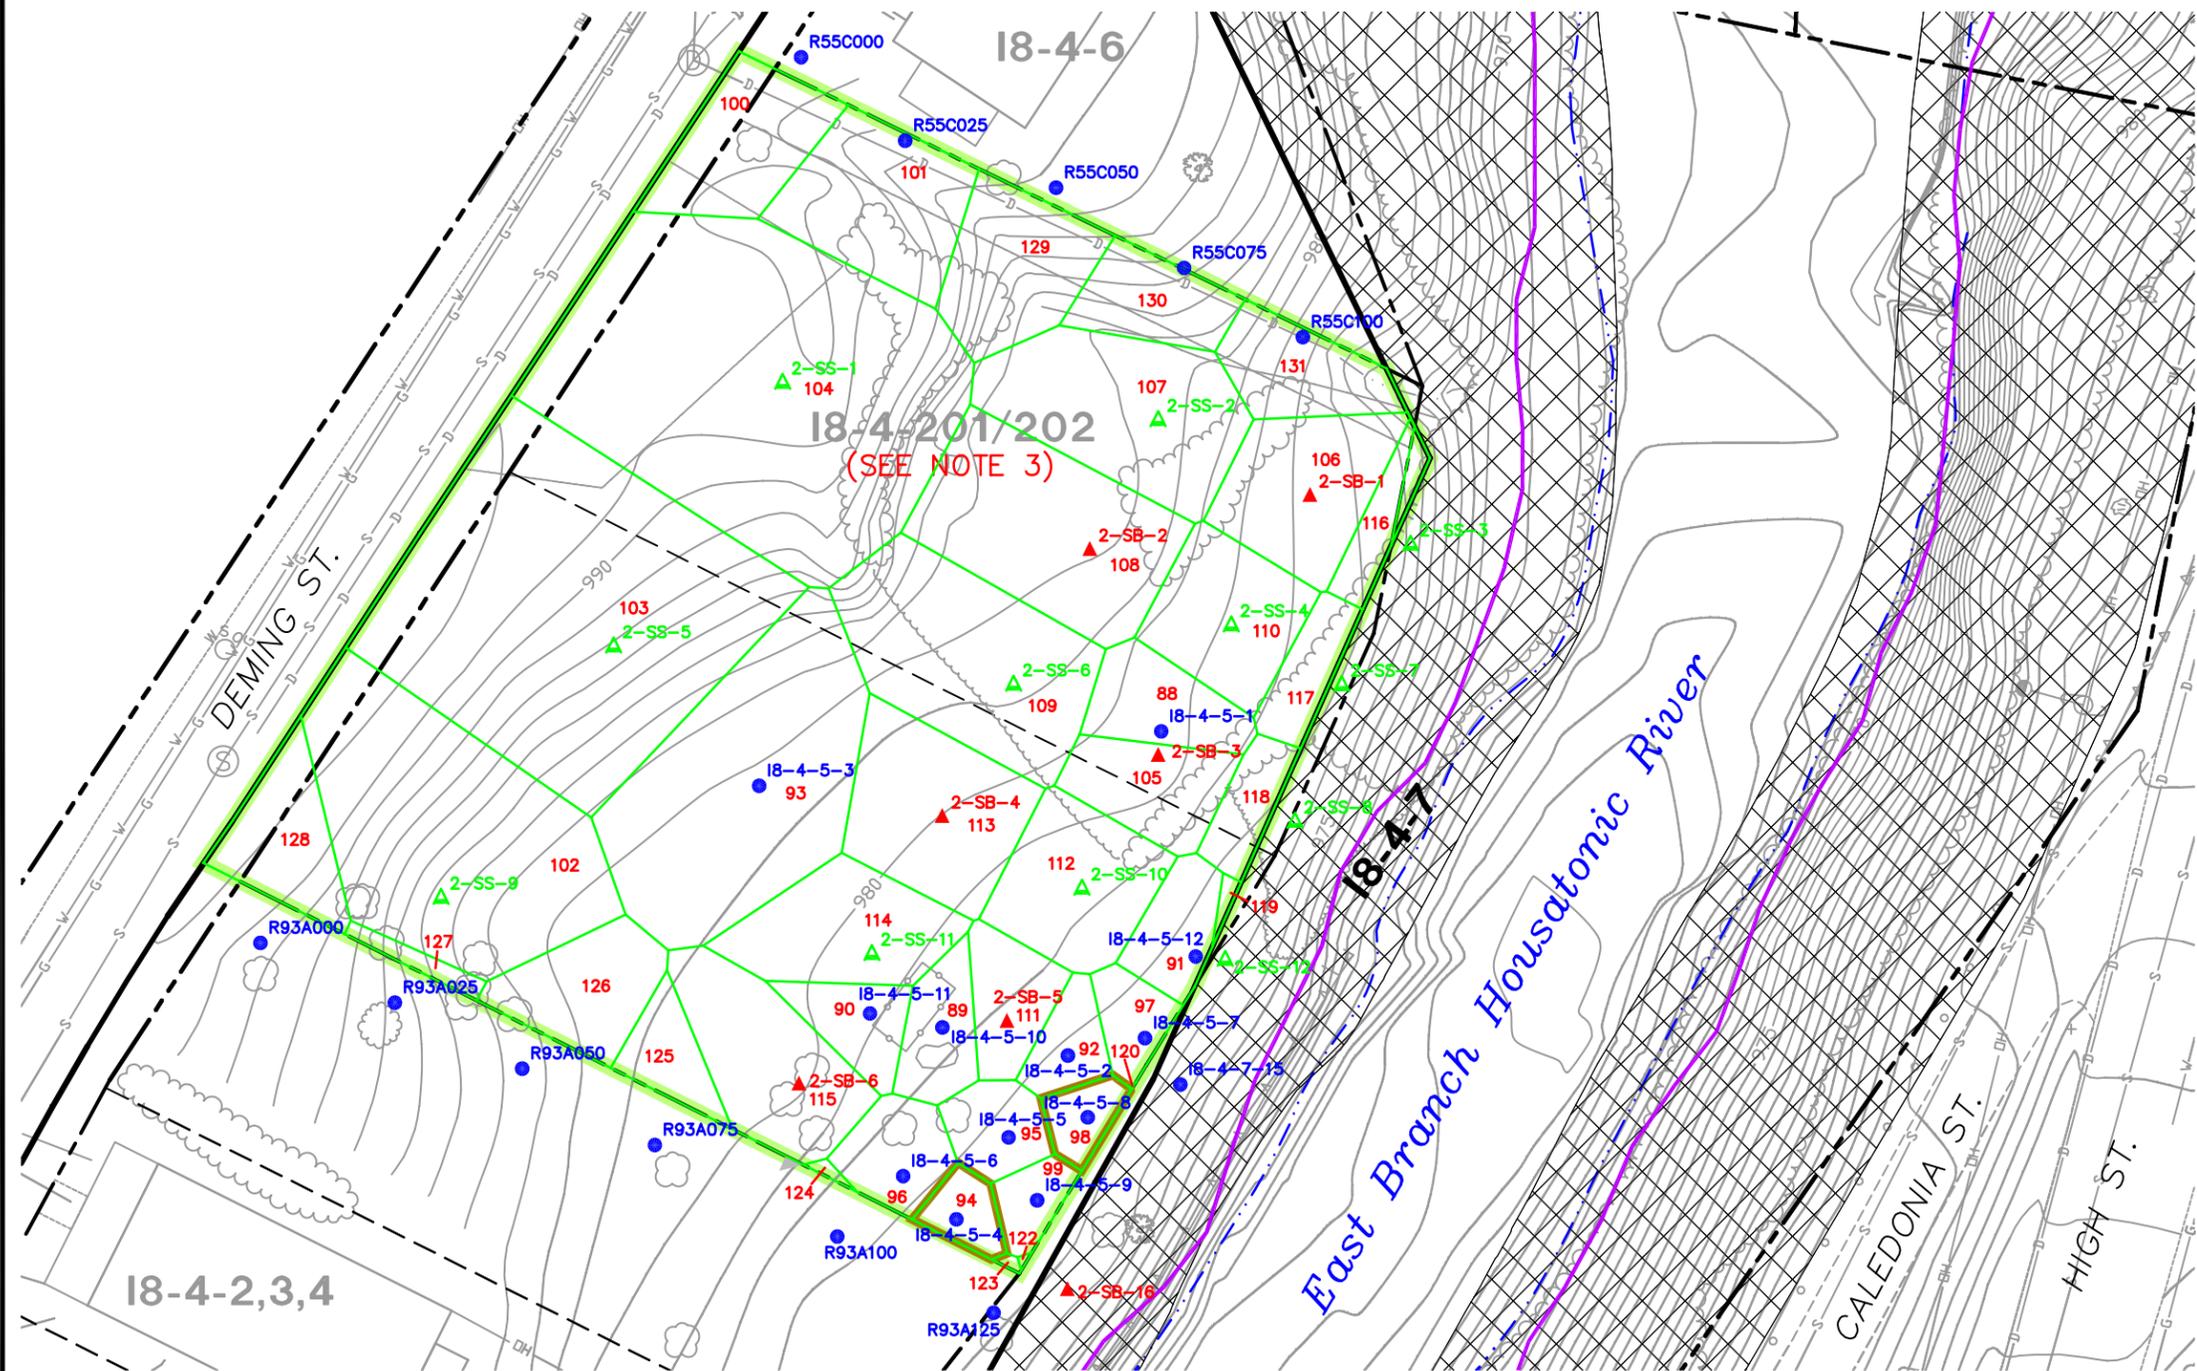


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-5-3 PRE-2000 SOIL BORING LOCATION
- 2-SS-1 PRE-DESIGN (2003) SURFACE SOIL SAMPLE LOCATION
- 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 3** POLYGON ID
- AREA PROPOSED FOR SOIL REMOVAL

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
4. SAMPLE LOCATIONS ARE APPROXIMATE.
5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCELS 18-4-201/202  
 THEISSEN POLYGON MAP  
 0- TO 0.5-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE **A-1**


SYR-85-NES KLS DMW L: ON=\* OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004\PHASE2\_ADDENDUM\_40122630.DWG SAVED:12/11/2006 10:58 AM LAYOUT:LAYOUT1 PAGESETUP:----- PENTABLE:PLTFULLCTB PRINTED:12/12/2006 9:52 AM BY:DWODARCZYK  
 PROJECTNAME:-----  
 XREFS: IMAGES:-----  
 40122X03  
 40122X0A

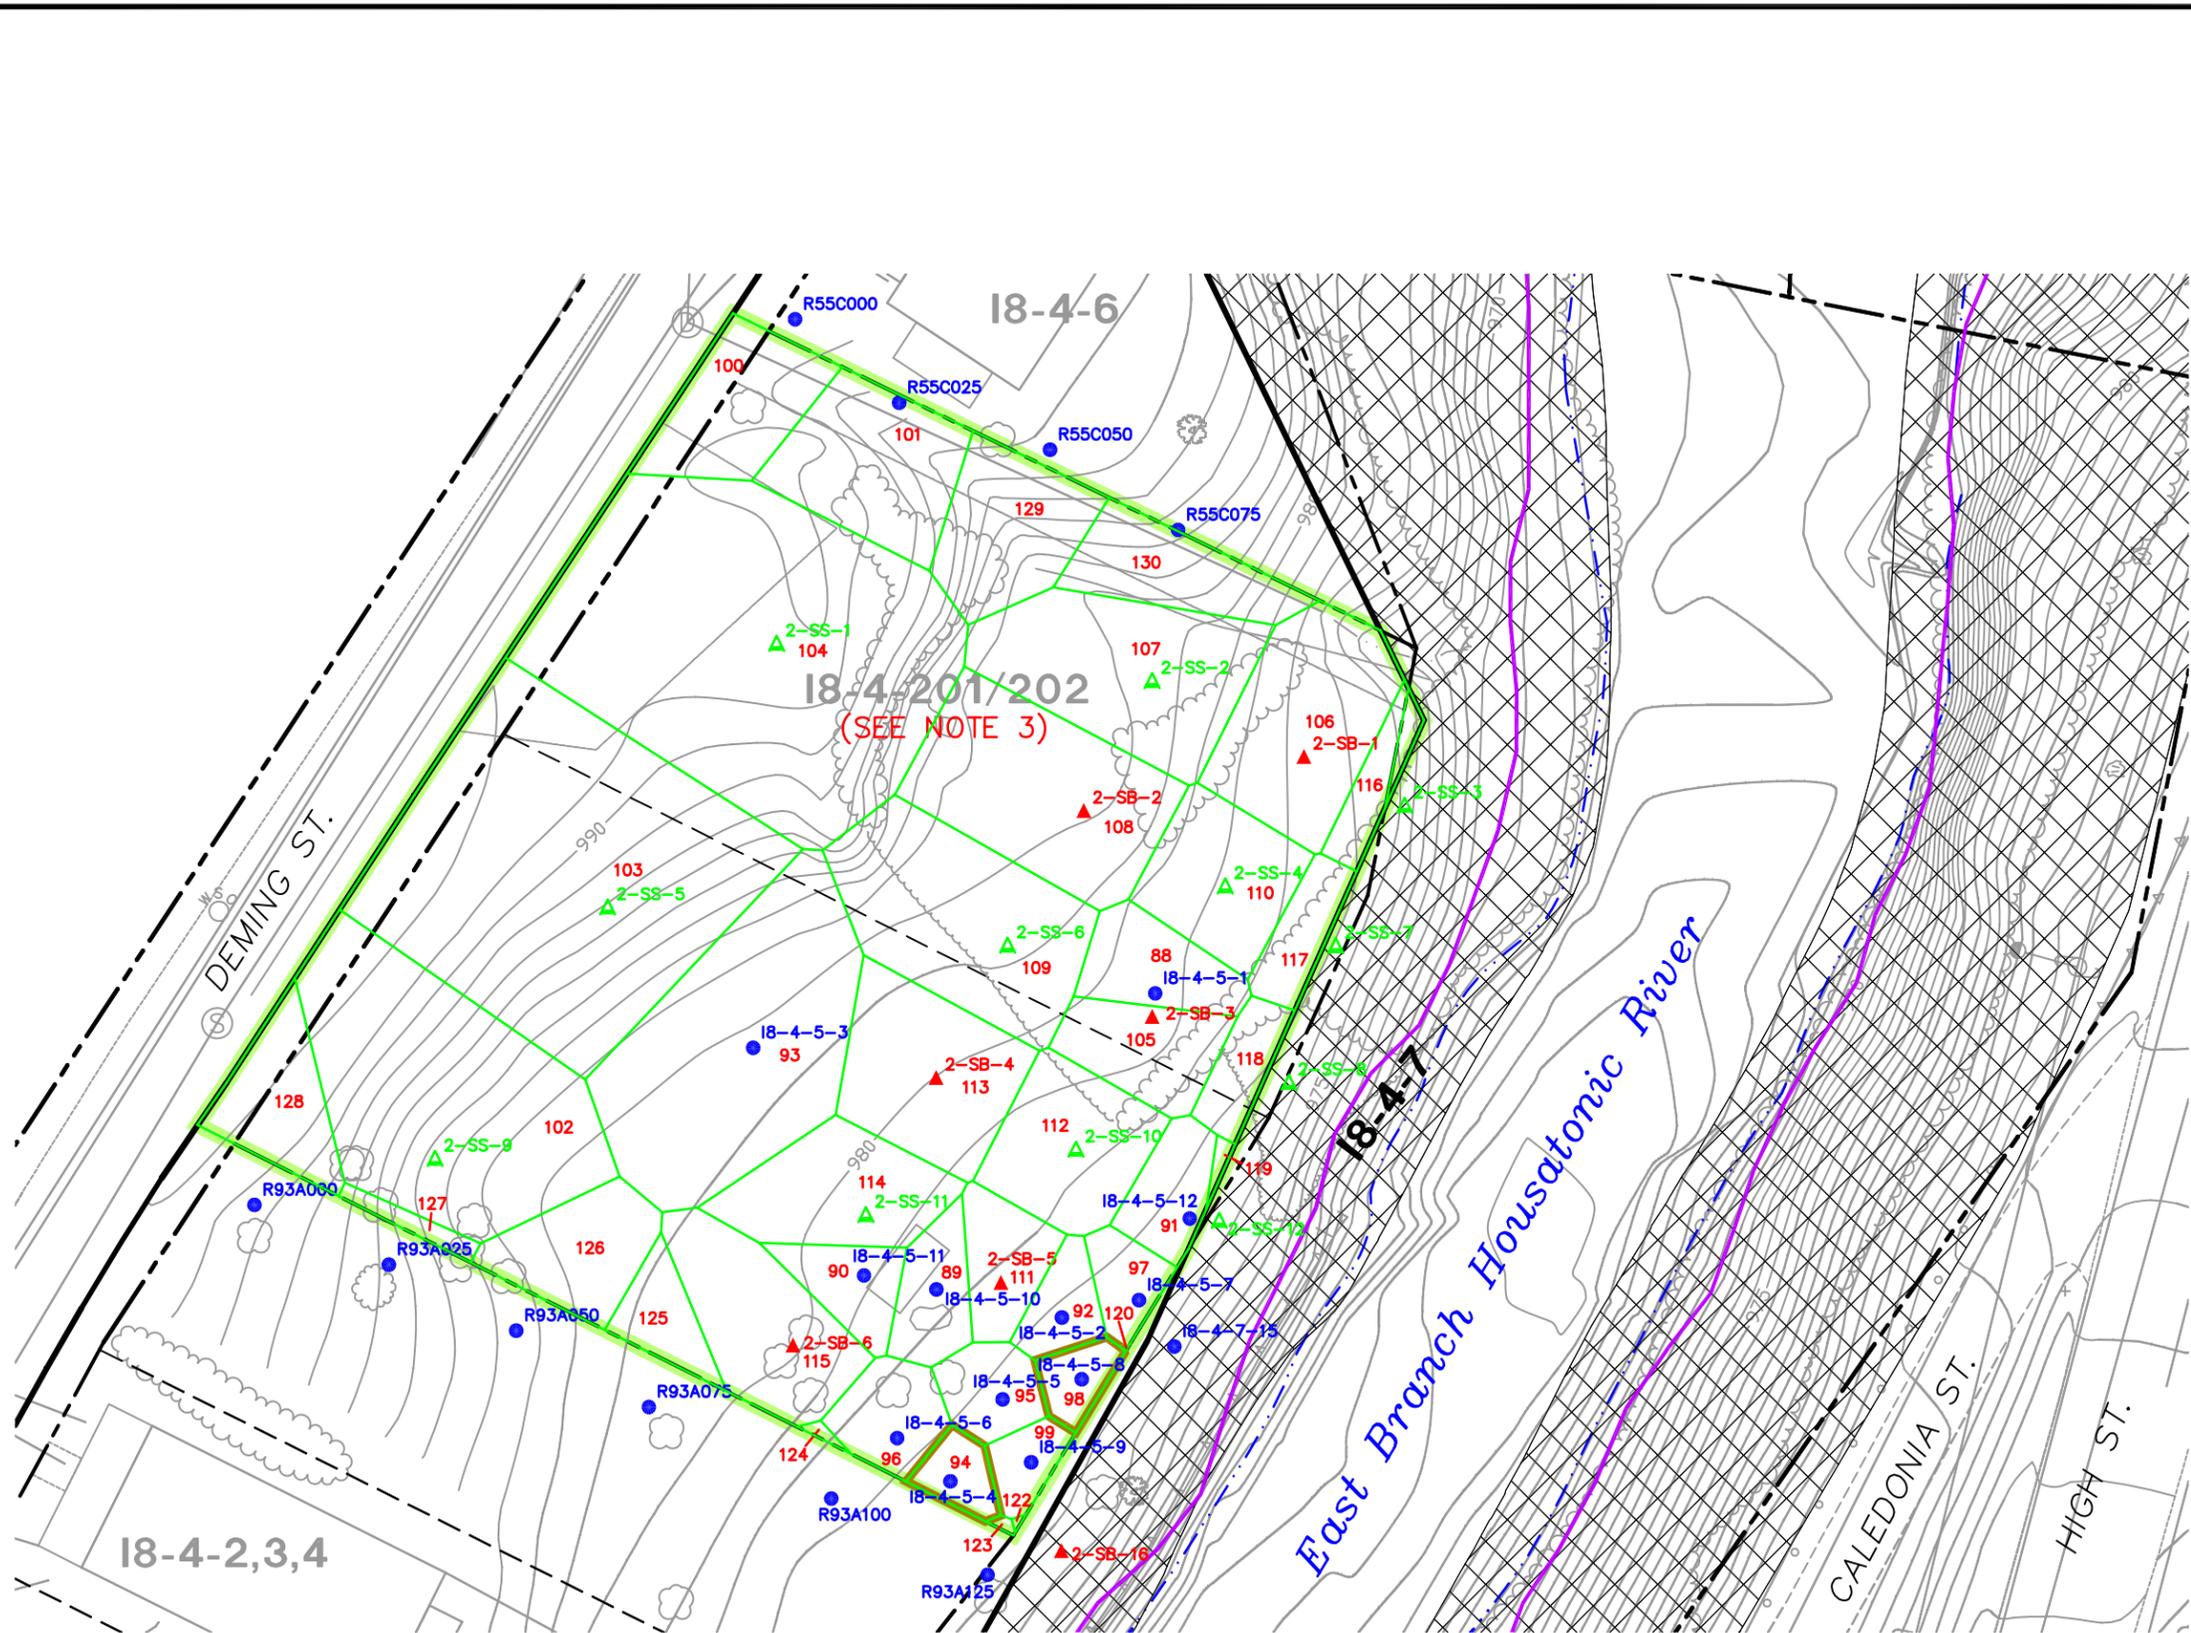

**LEGEND**

- BOUNDARY OF FLOODPLAIN
- PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- - - APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-5-3 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SS-1 PRE-DESIGN (2003) SURFACE SOIL SAMPLE LOCATION
- ▲ 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- × × WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- ▲ ▲ RETAINING WALL
- 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- Ⓧ DRAIN MANHOLE
- Ⓢ SANITARY MANHOLE
- Ⓜ WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 94 POLYGON ID
- AREA PROPOSED FOR SOIL REMOVAL

- NOTES TO FIGURE:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
  2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
  3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
  4. SAMPLE LOCATIONS ARE APPROXIMATE.
  5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCELS 18-4-201/202  
 THEISSEN POLYGON MAP  
 0.5- TO 1-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-2**


SYR-85-NES KLS DMW L: ON=\*\* OFF=REF\*  
 G:\GE\_ACTIVE\N\_40122004\PHASE2\_ADDENDUM\40122625.DWG SAVED:12/11/2006 10:58 AM LAYOUT:Layout1 PAGES:1 OF 1 PENTABLE:PLTFULLCTB PRINTED:12/11/2006 1:19 PM BY:DWODARCZYK  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

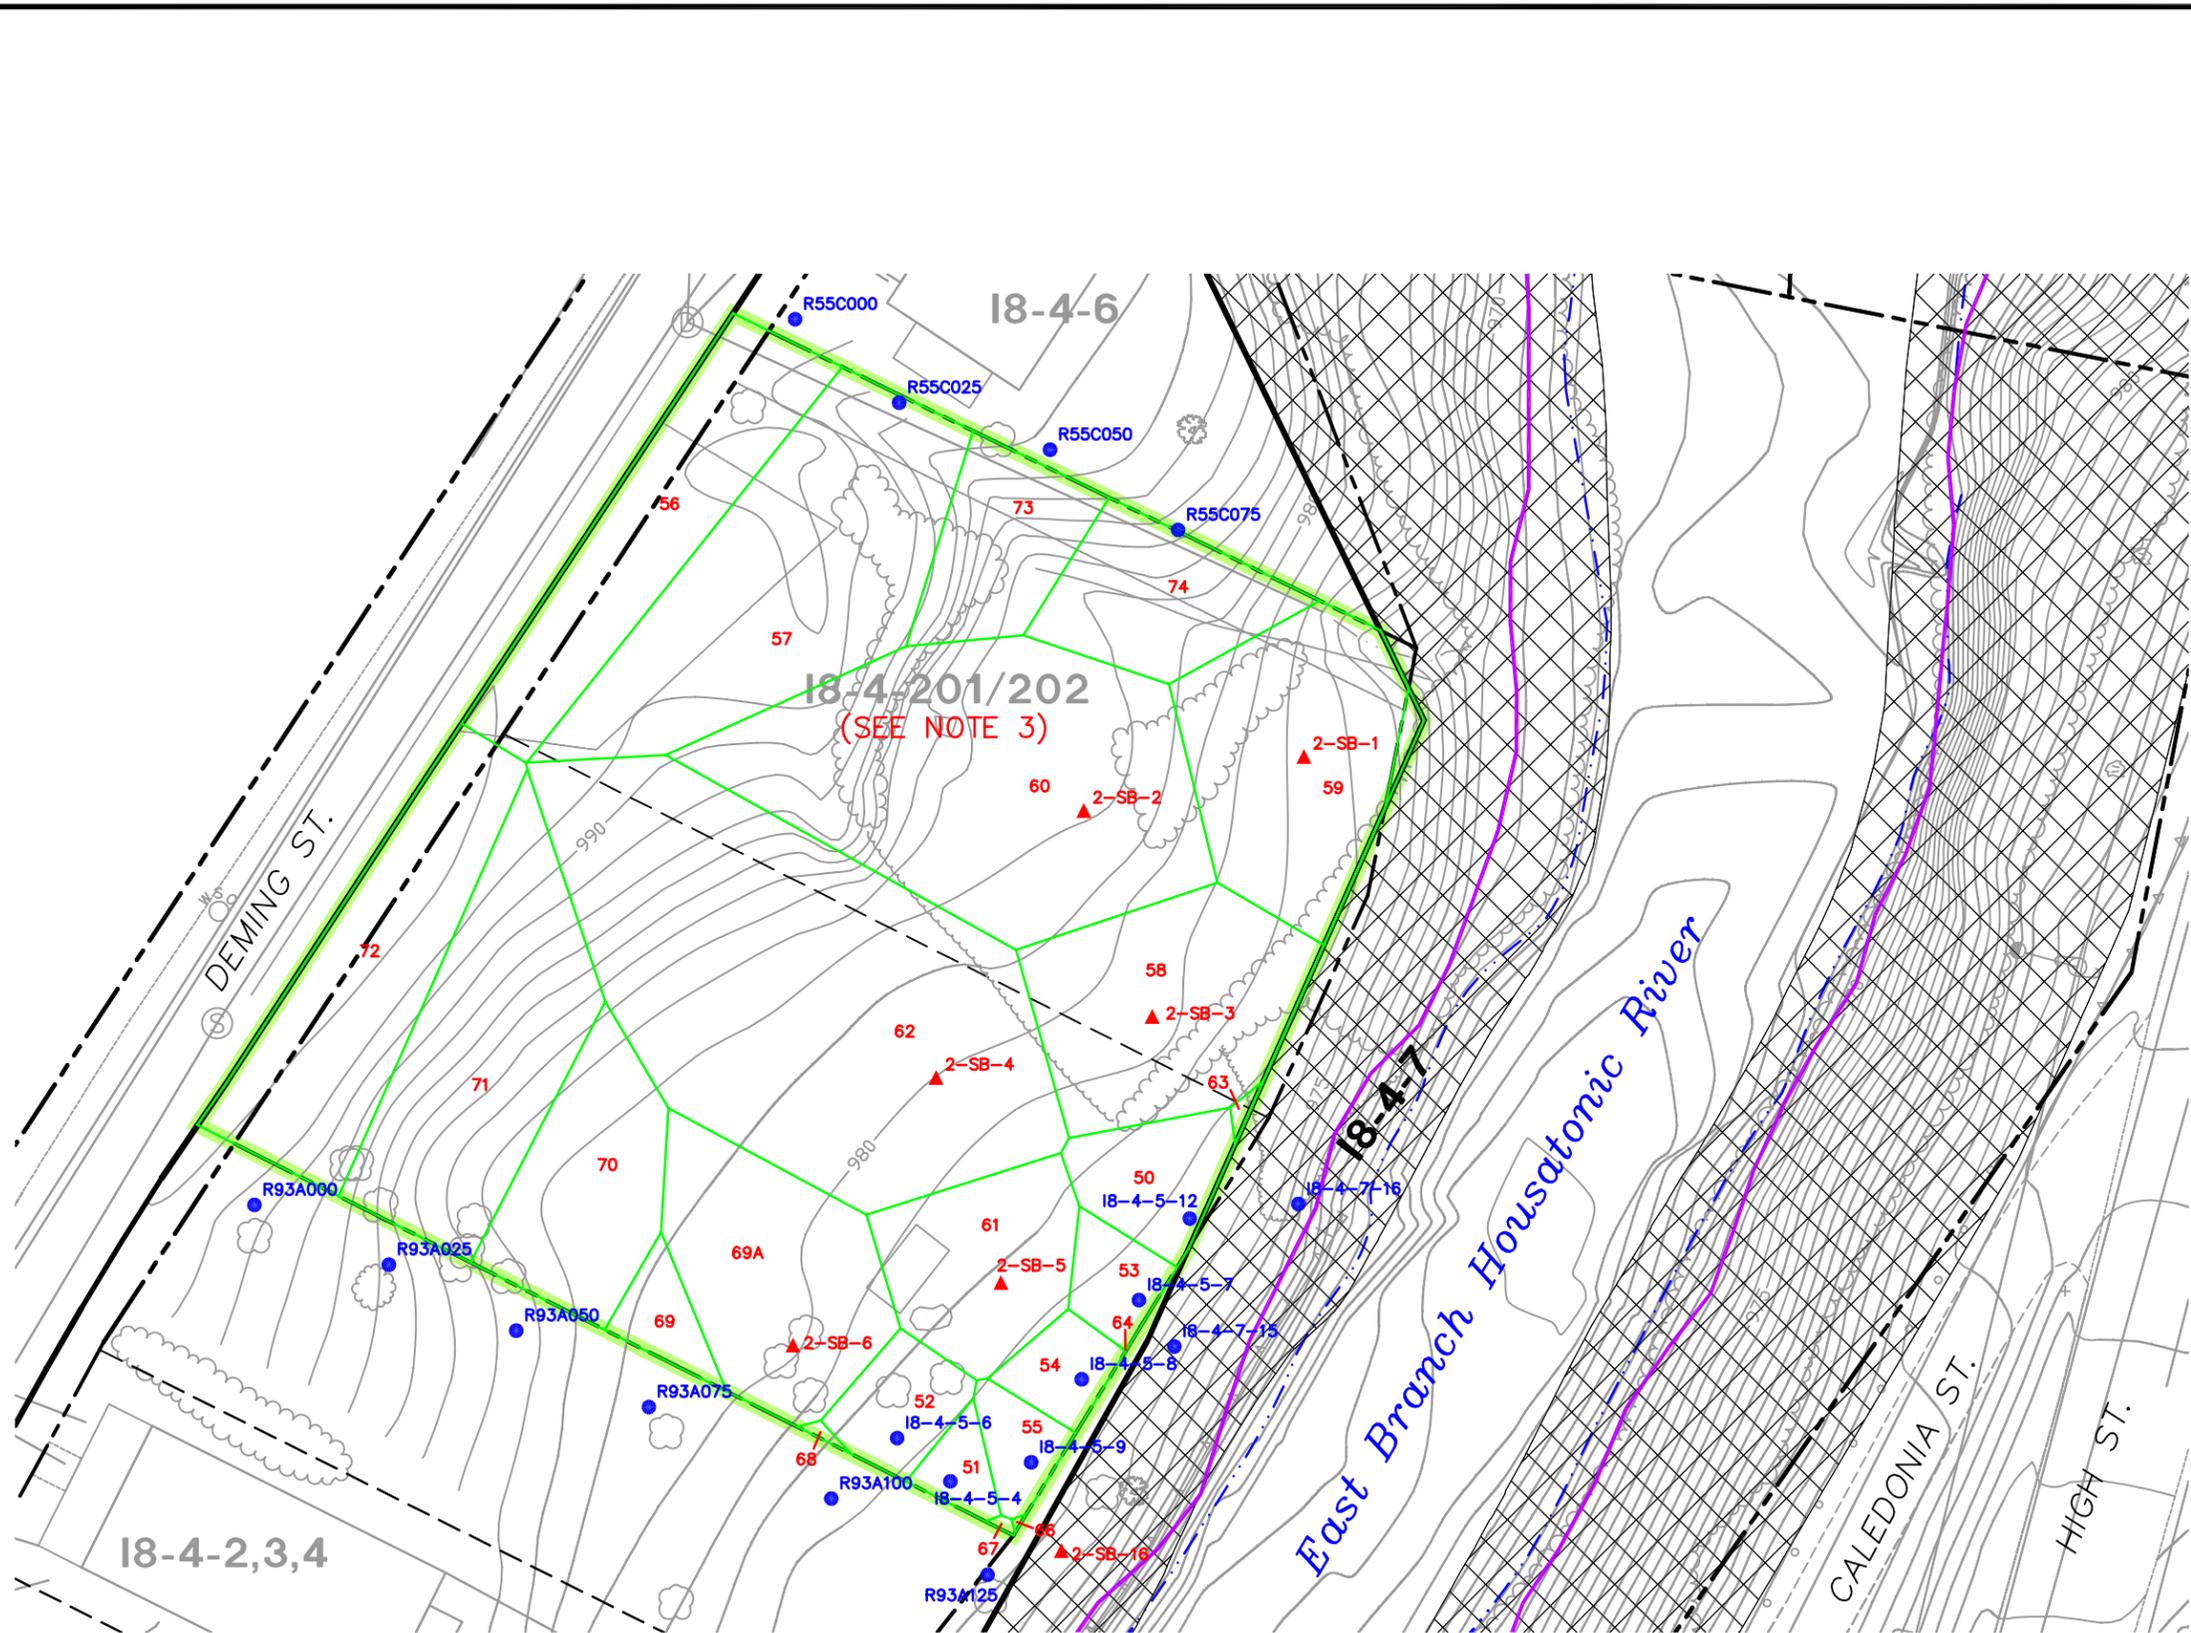

**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-5-3 PRE-2000 SOIL BORING LOCATION
- 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH. POLYGON ID 58

- NOTES TO FIGURE:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
  2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
  3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
  4. SAMPLE LOCATIONS ARE APPROXIMATE.
  5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCELS 18-4-201/202  
 THEISSEN POLYGON MAP  
 1- TO 1.5-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-3**


SYR-85-NES KLS DMW L: ON=\*\* OFF=REF\*  
 G:\GE\_ACTIVE\N\_40122004\PHASE2\_ADDENDUM\40122631.DWG SAVED: 12/11/2006 10:58 AM LAYOUT: Layout1 PAGES: 1 OF 1 PENTABLE: PLTFULL.CTB PRINTED: 12/11/2006 1:26 PM BY: DWODARCZYK  
 PROJECTNAME: IMAGES:  
 XREFS: 40122X03  
 40122X04

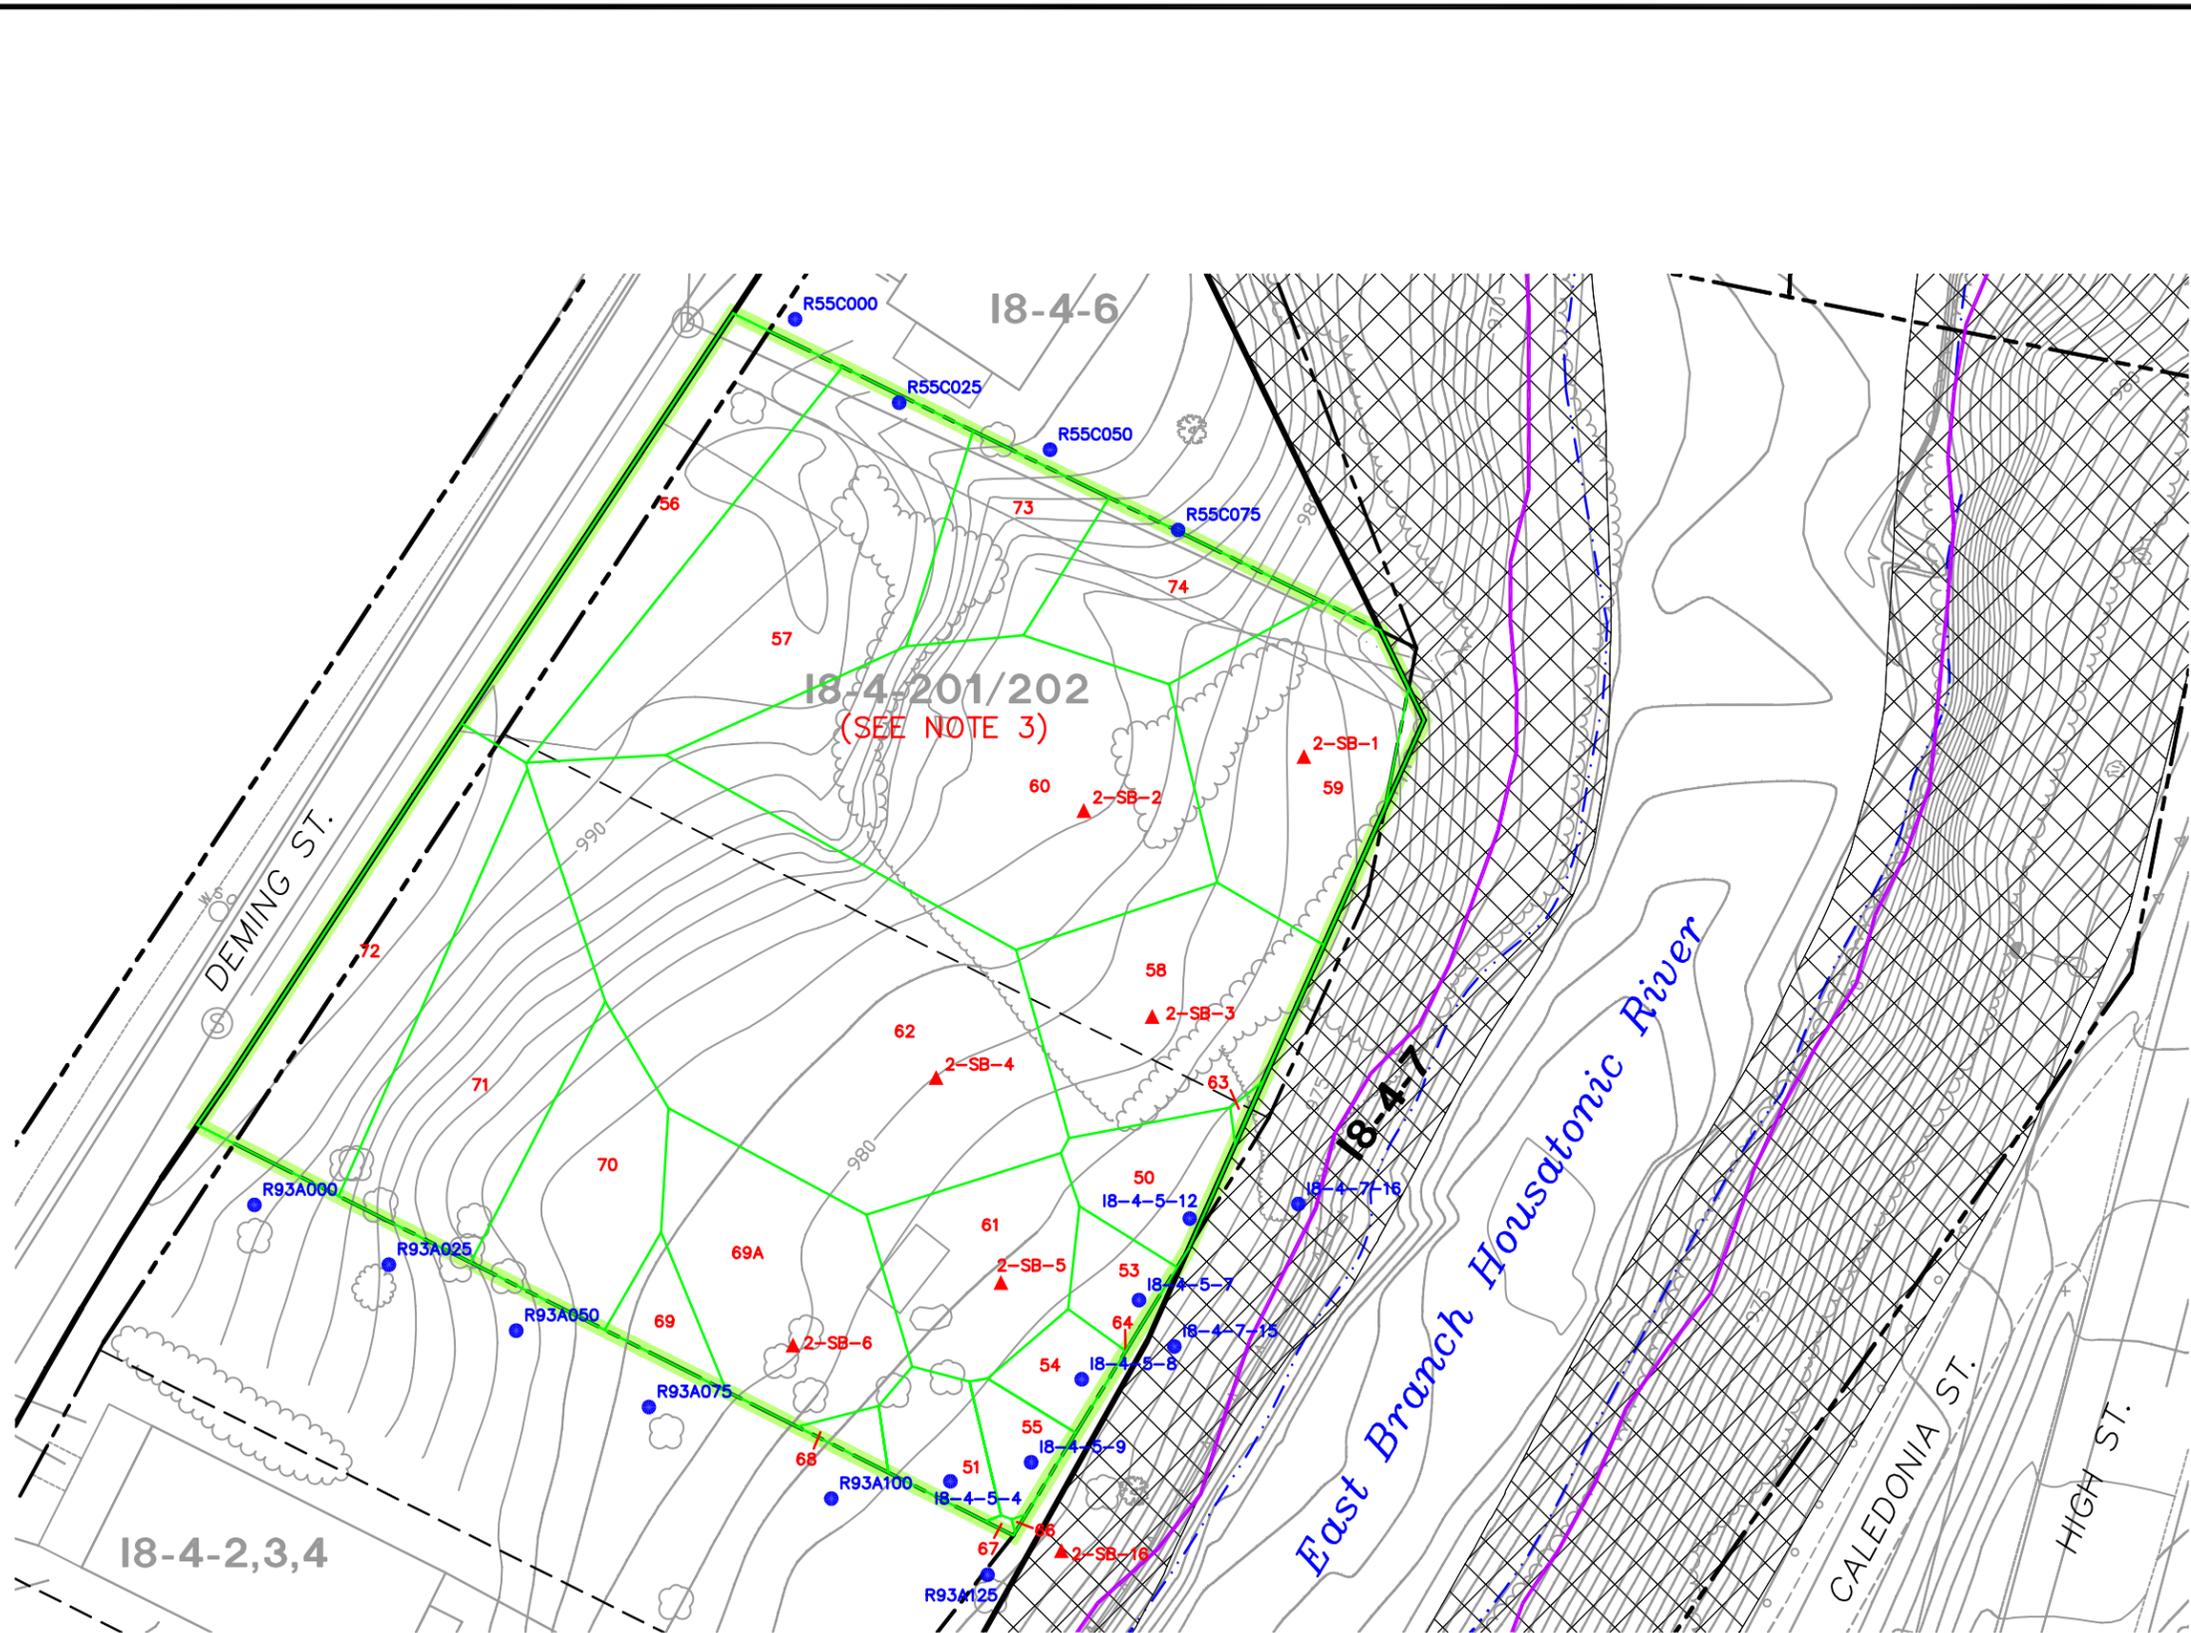

**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-5-4 PRE-2000 SOIL BORING LOCATION
- 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH. POLYGON ID 58

- NOTES TO FIGURE:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
  2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
  3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
  4. SAMPLE LOCATIONS ARE APPROXIMATE.
  5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**PARCELS 18-4-201/202  
 THEISSEN POLYGON MAP  
 1.5- TO 2-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-4**



SYR-85-NES-KLS-DMW L: ON=\* OFF=\*REF\*  
 G:\GE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122632.DWG SAVED:12/11/2006 11:00 AM LAYOUT:Layout1 PAGES:1 OF 1 PENTABLE:PLTFULL.CTB PRINTED:12/11/2006 1:27 PM BY:DWODARCZYK  
 PROJECTNAME: IMAGES:  
 XREFS: 40122X03  
 40122X0A

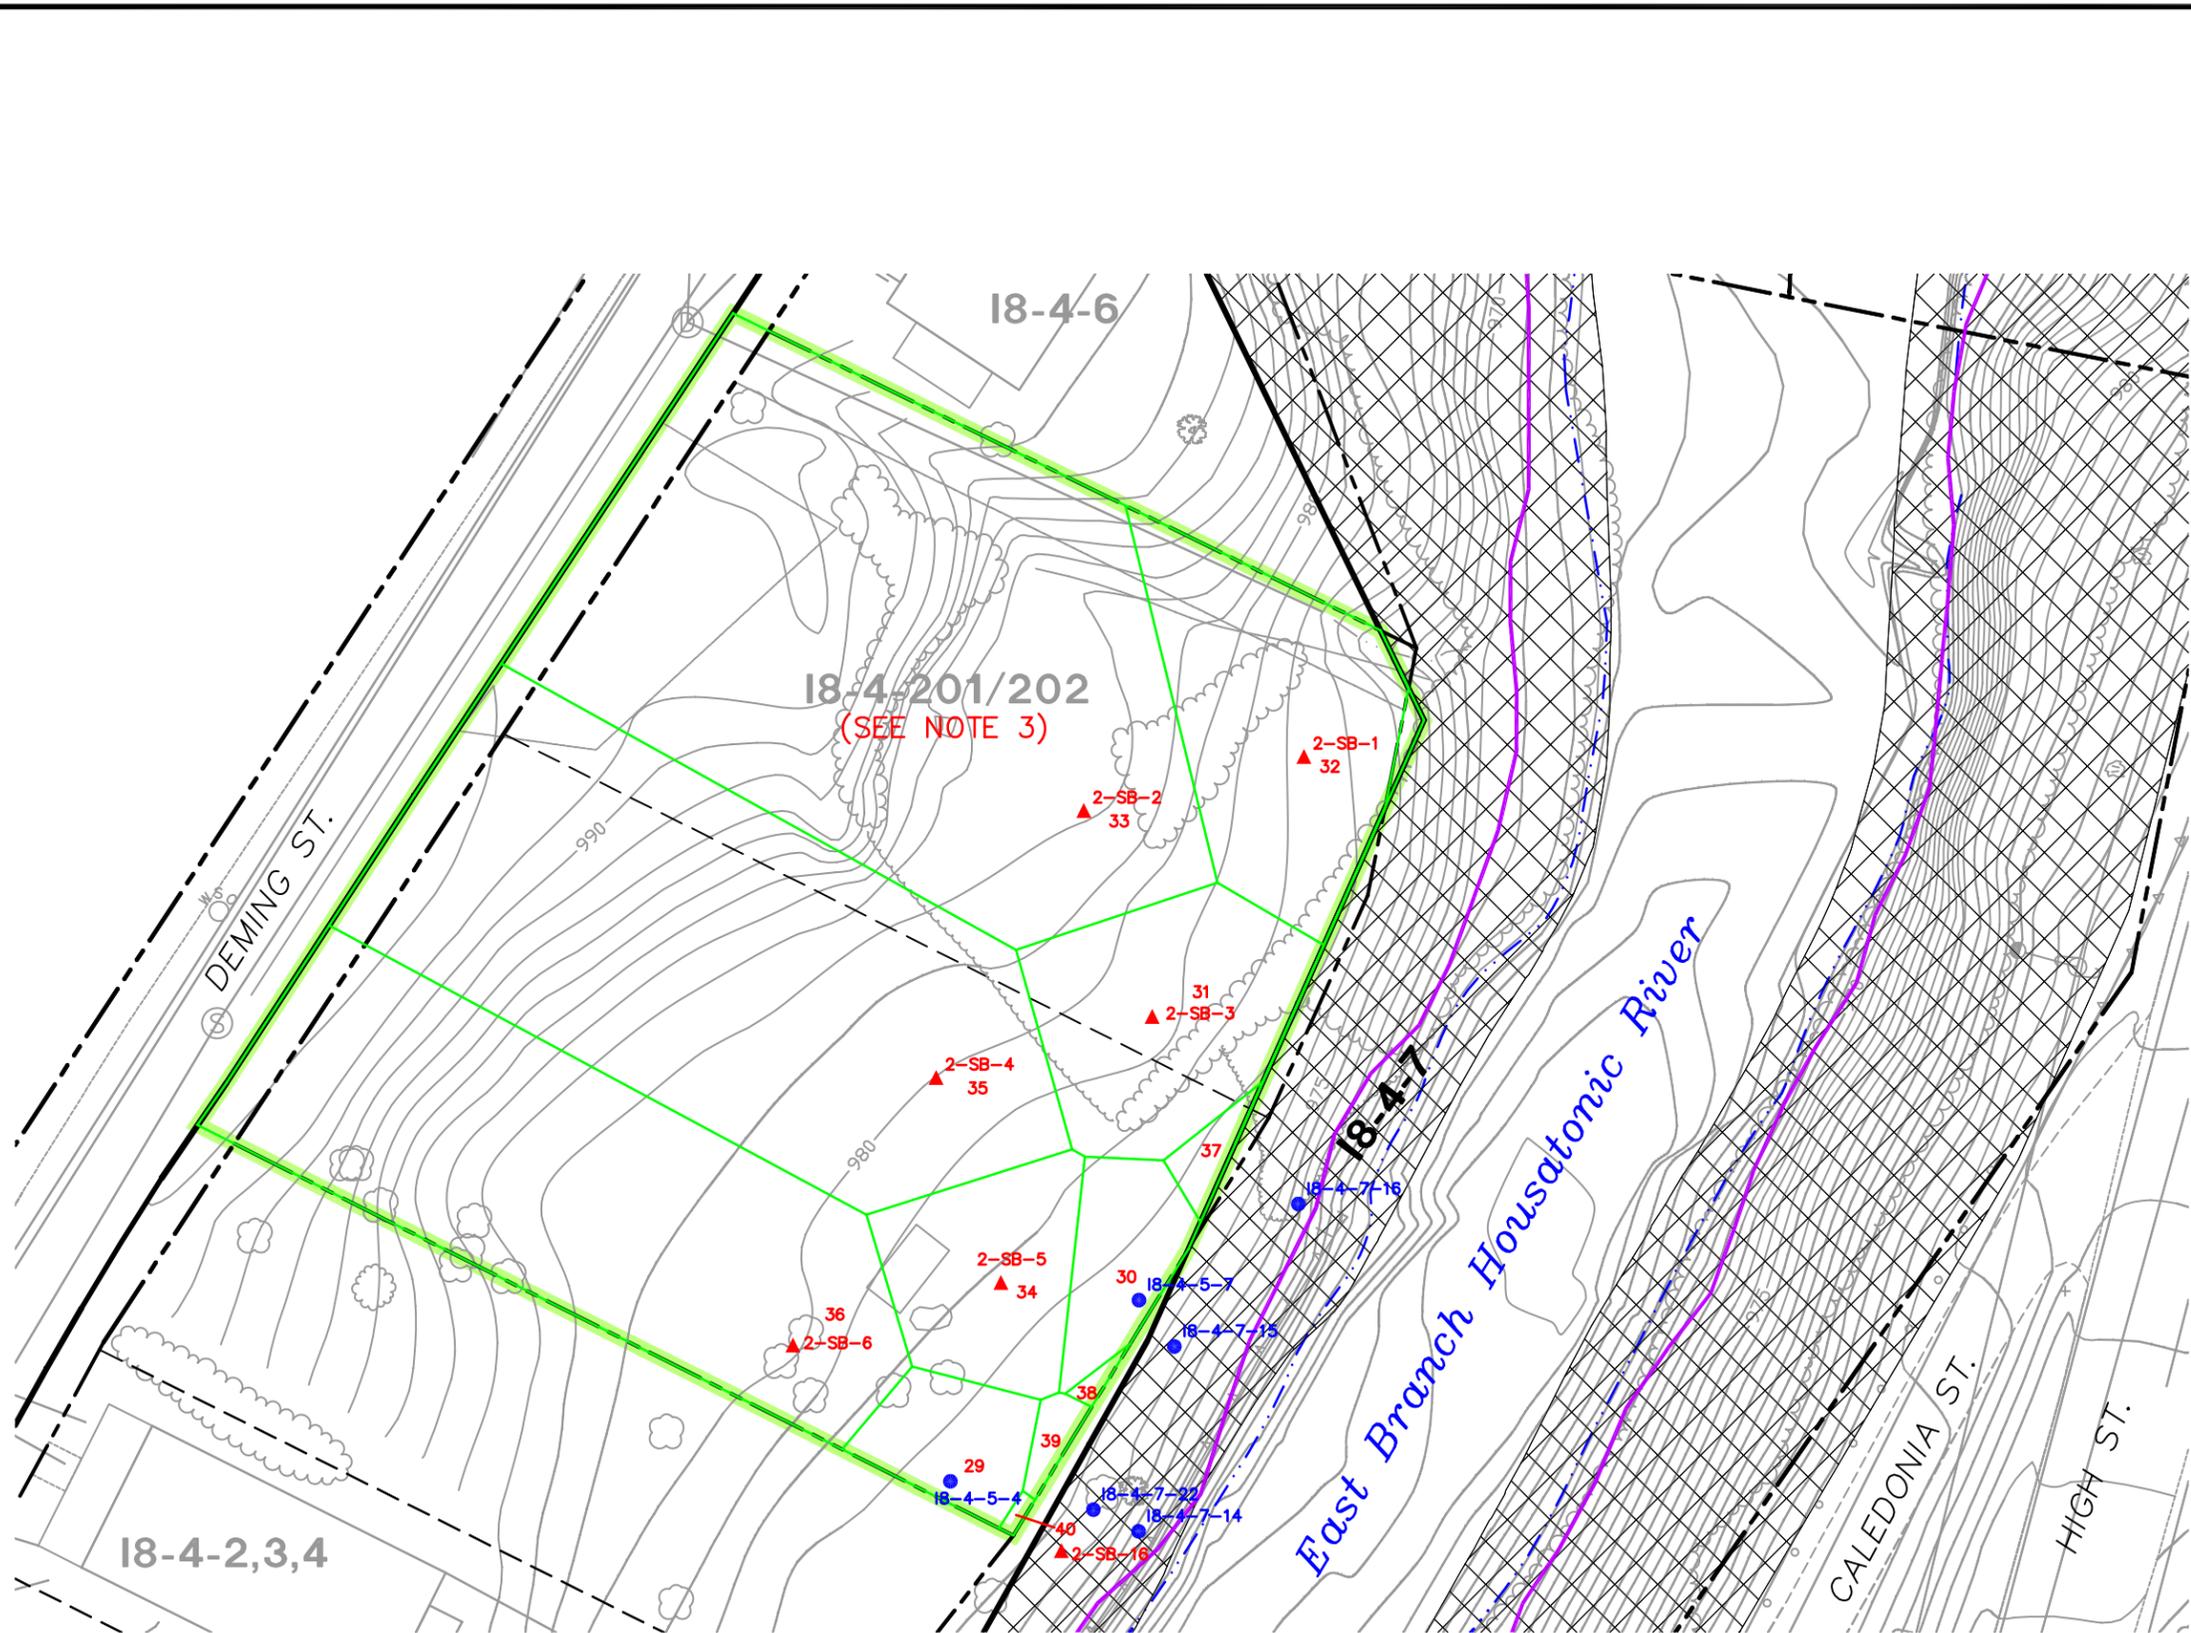


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- - - APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-5-4 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 35 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
4. SAMPLE LOCATIONS ARE APPROXIMATE.
5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCELS 18-4-201/202  
 THEISSEN POLYGON MAP  
 2.5- TO 3.0-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-6**


SYR-85-NES-KLS-DMW L: ON= OFF=REF\*  
 G:\GE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122627.DWG  
 PROJECTNAME: 40122X03  
 XREFS: 40122X03  
 40122X0A  
 PENTABLE: PLTFULL.CTB PRINTED: 12/11/2006 1:20 PM BY: DWODARCZYK  
 LAYOUT: Layout1 PAGESETUP: PENTABLE: PLTFULL.CTB PRINTED: 12/11/2006 1:20 PM BY: DWODARCZYK

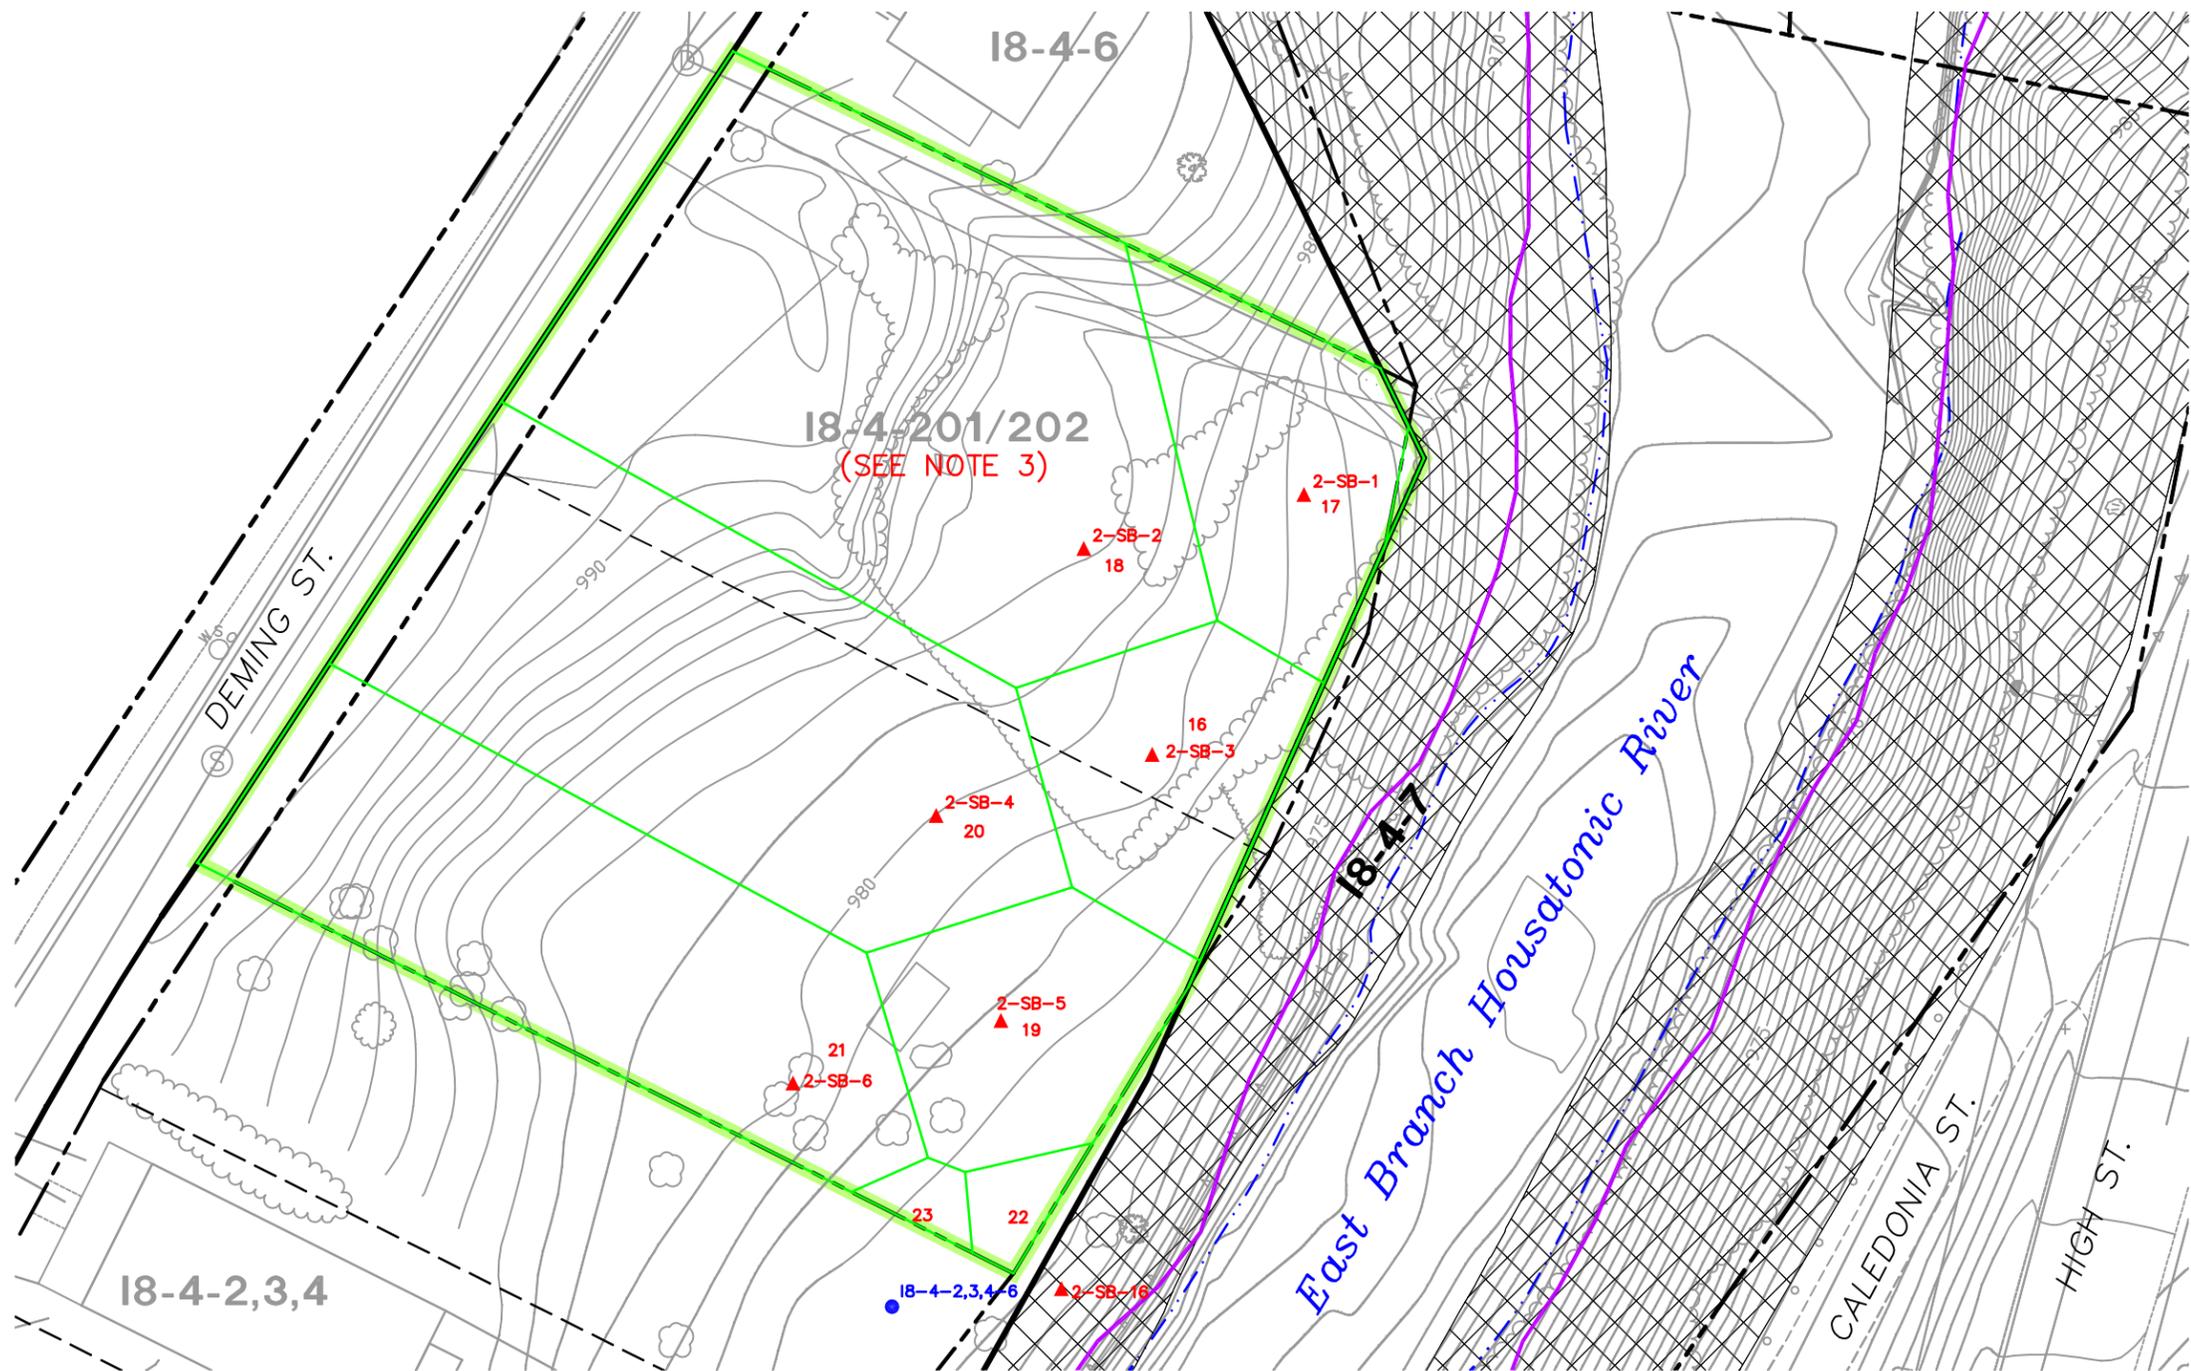

**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-6 PRE-2000 SOIL BORING LOCATION
- 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 19** POLYGON ID

- NOTES TO FIGURE:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
  2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
  3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
  4. SAMPLE LOCATIONS ARE APPROXIMATE.
  5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCELS 18-4-201/202  
 THEISSEN POLYGON MAP  
 3- TO 4-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-7**

SYR-85-NES-KLS-DMW L: ON=\* OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004\PHASE2\_ADDENDUM\40122628.DWG  
 PROJECTNAME: PHASE2\_ADDENDUM\_40122628.DWG  
 XREFS: 40122X03  
 40122X04  
 PENTABLE: PLTFULL.CTB PRINTED: 12/11/2006 1:22 PM BY: DWODARCZYK  
 LAYOUT: Layout1 PAGESETUP: -----  
 SAVED: 12/11/2006 11:02 AM

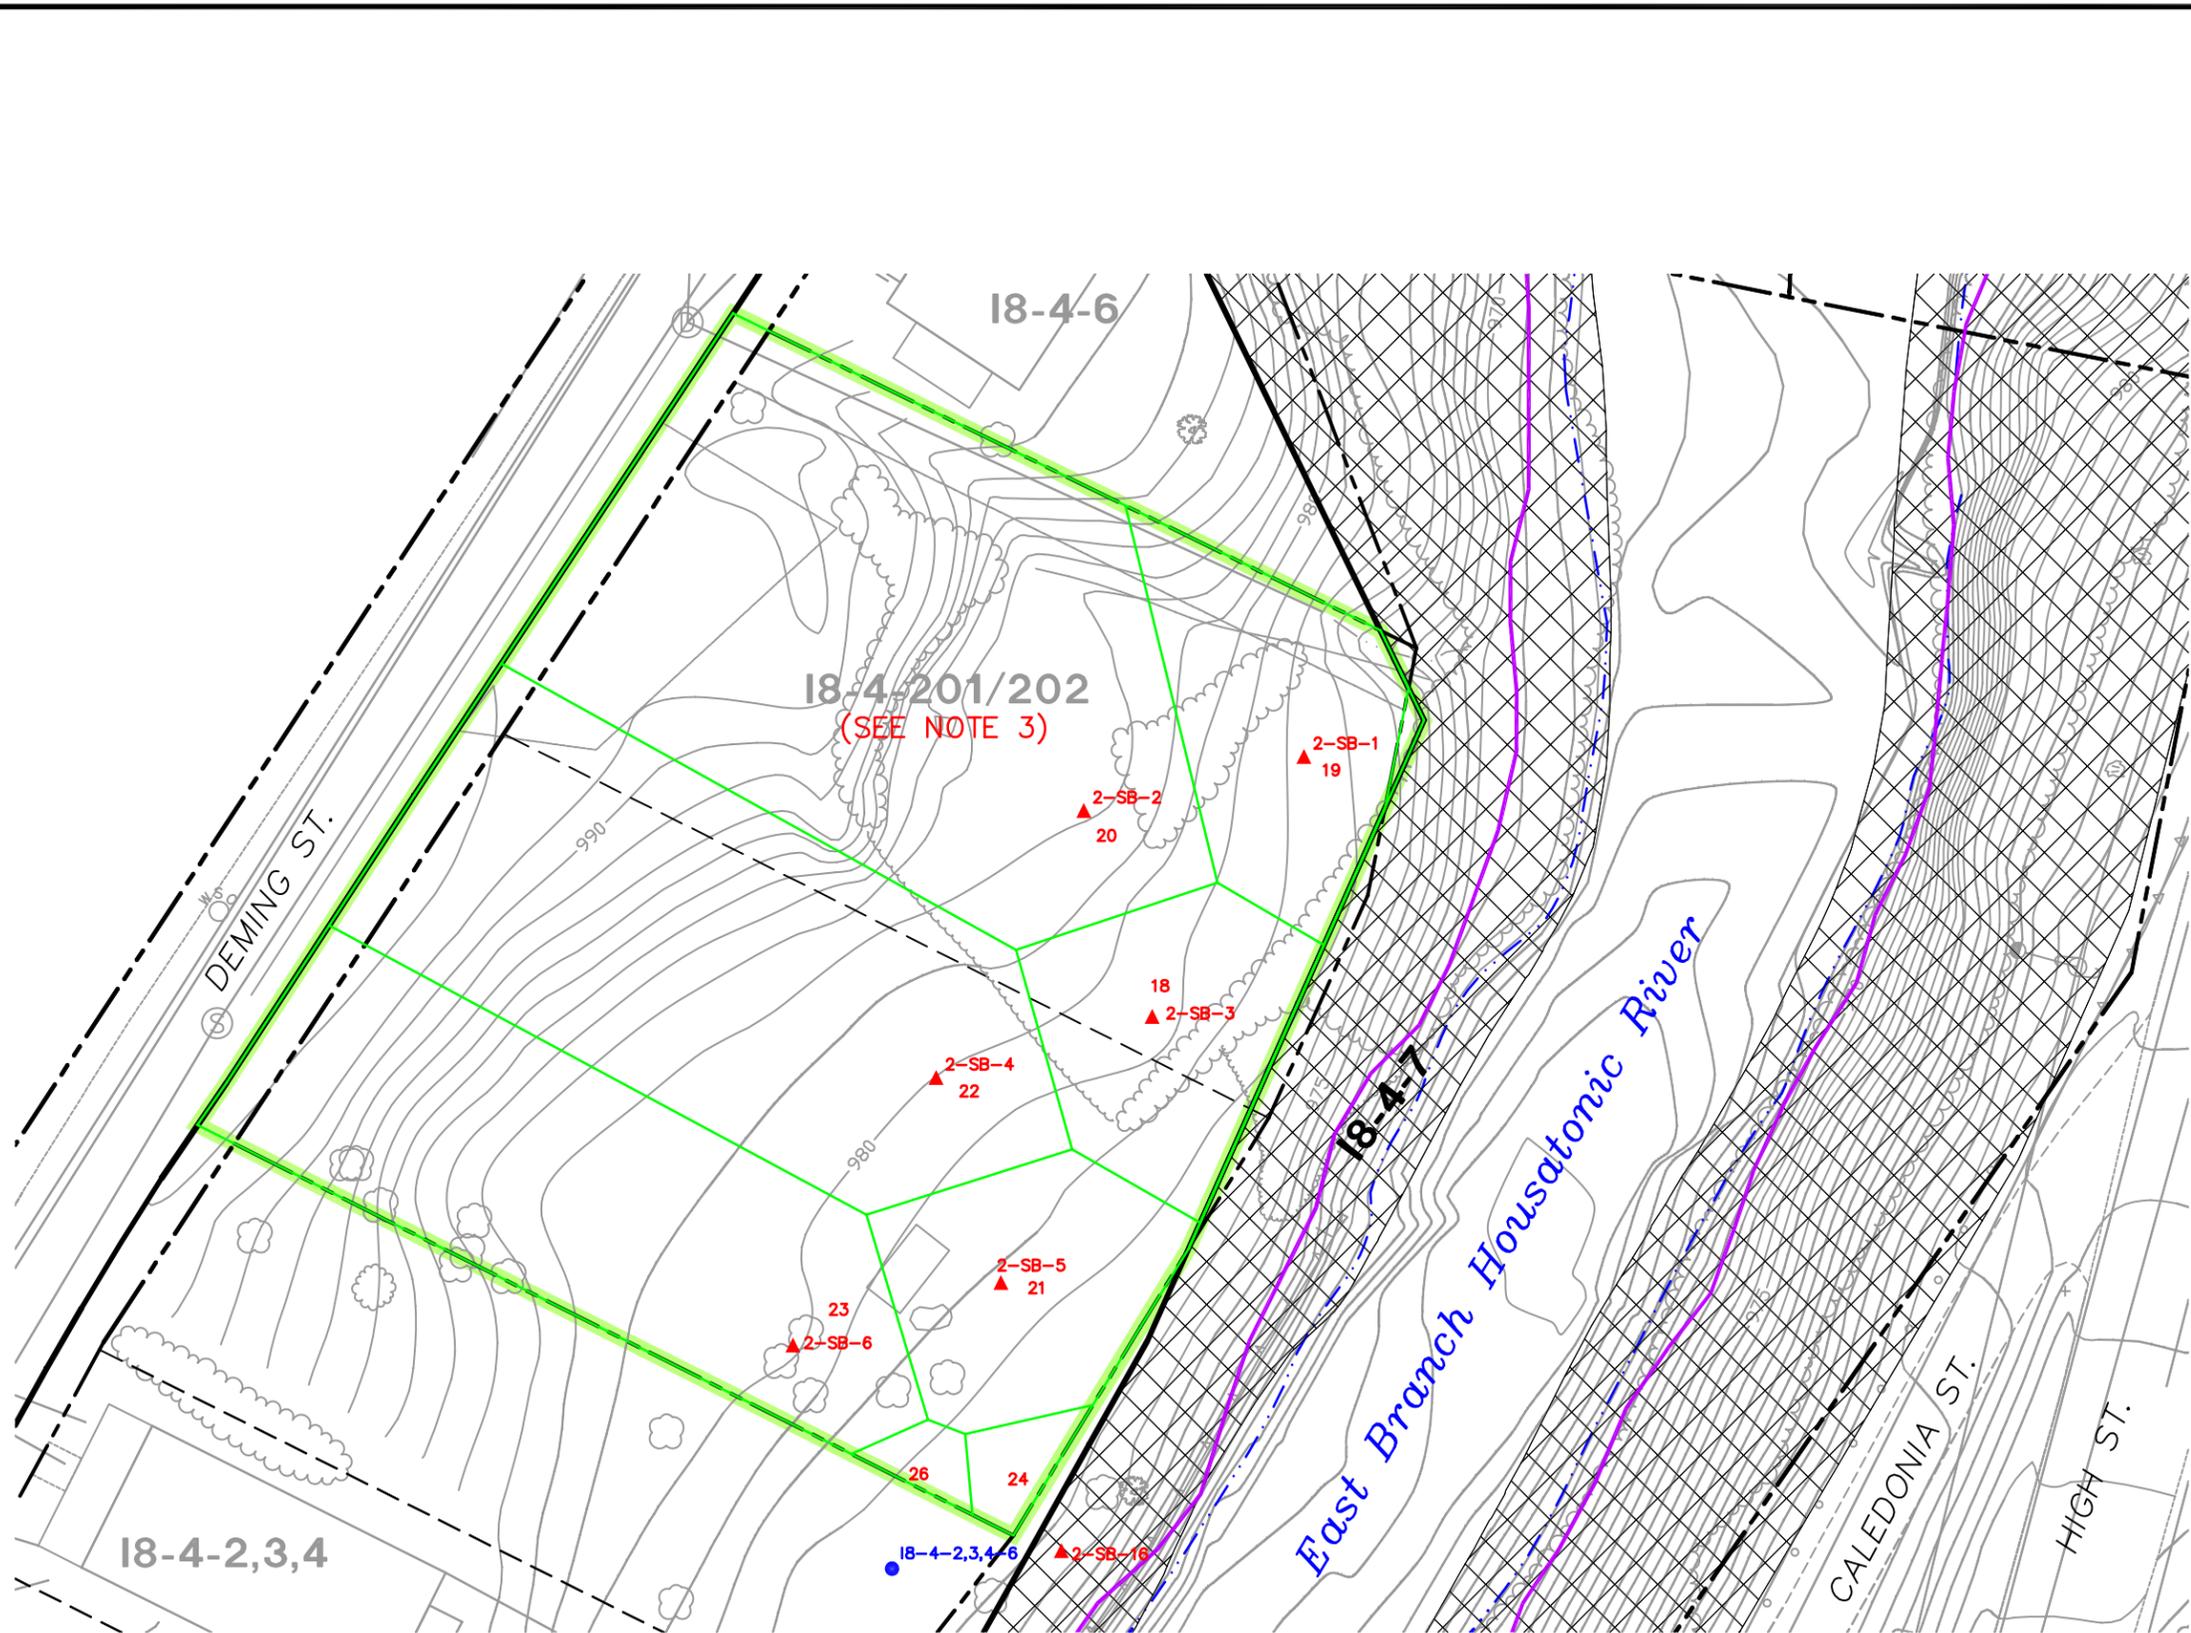


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-6 PRE-2000 SOIL BORING LOCATION
- 2-SB-1 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 23** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
4. SAMPLE LOCATIONS ARE APPROXIMATE.
5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**18-4-201/202  
 THEISSEN POLYGON MAP  
 4- TO 5-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-8**


SYR-85-NES KLS DMW L: ON= OFF=REF\*  
 G:\GE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122629.DWG  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A  
 PENTABLE: PLTFULL.CTB PRINTED: 12/11/2006 1:22 PM BY: DWODARCZYK

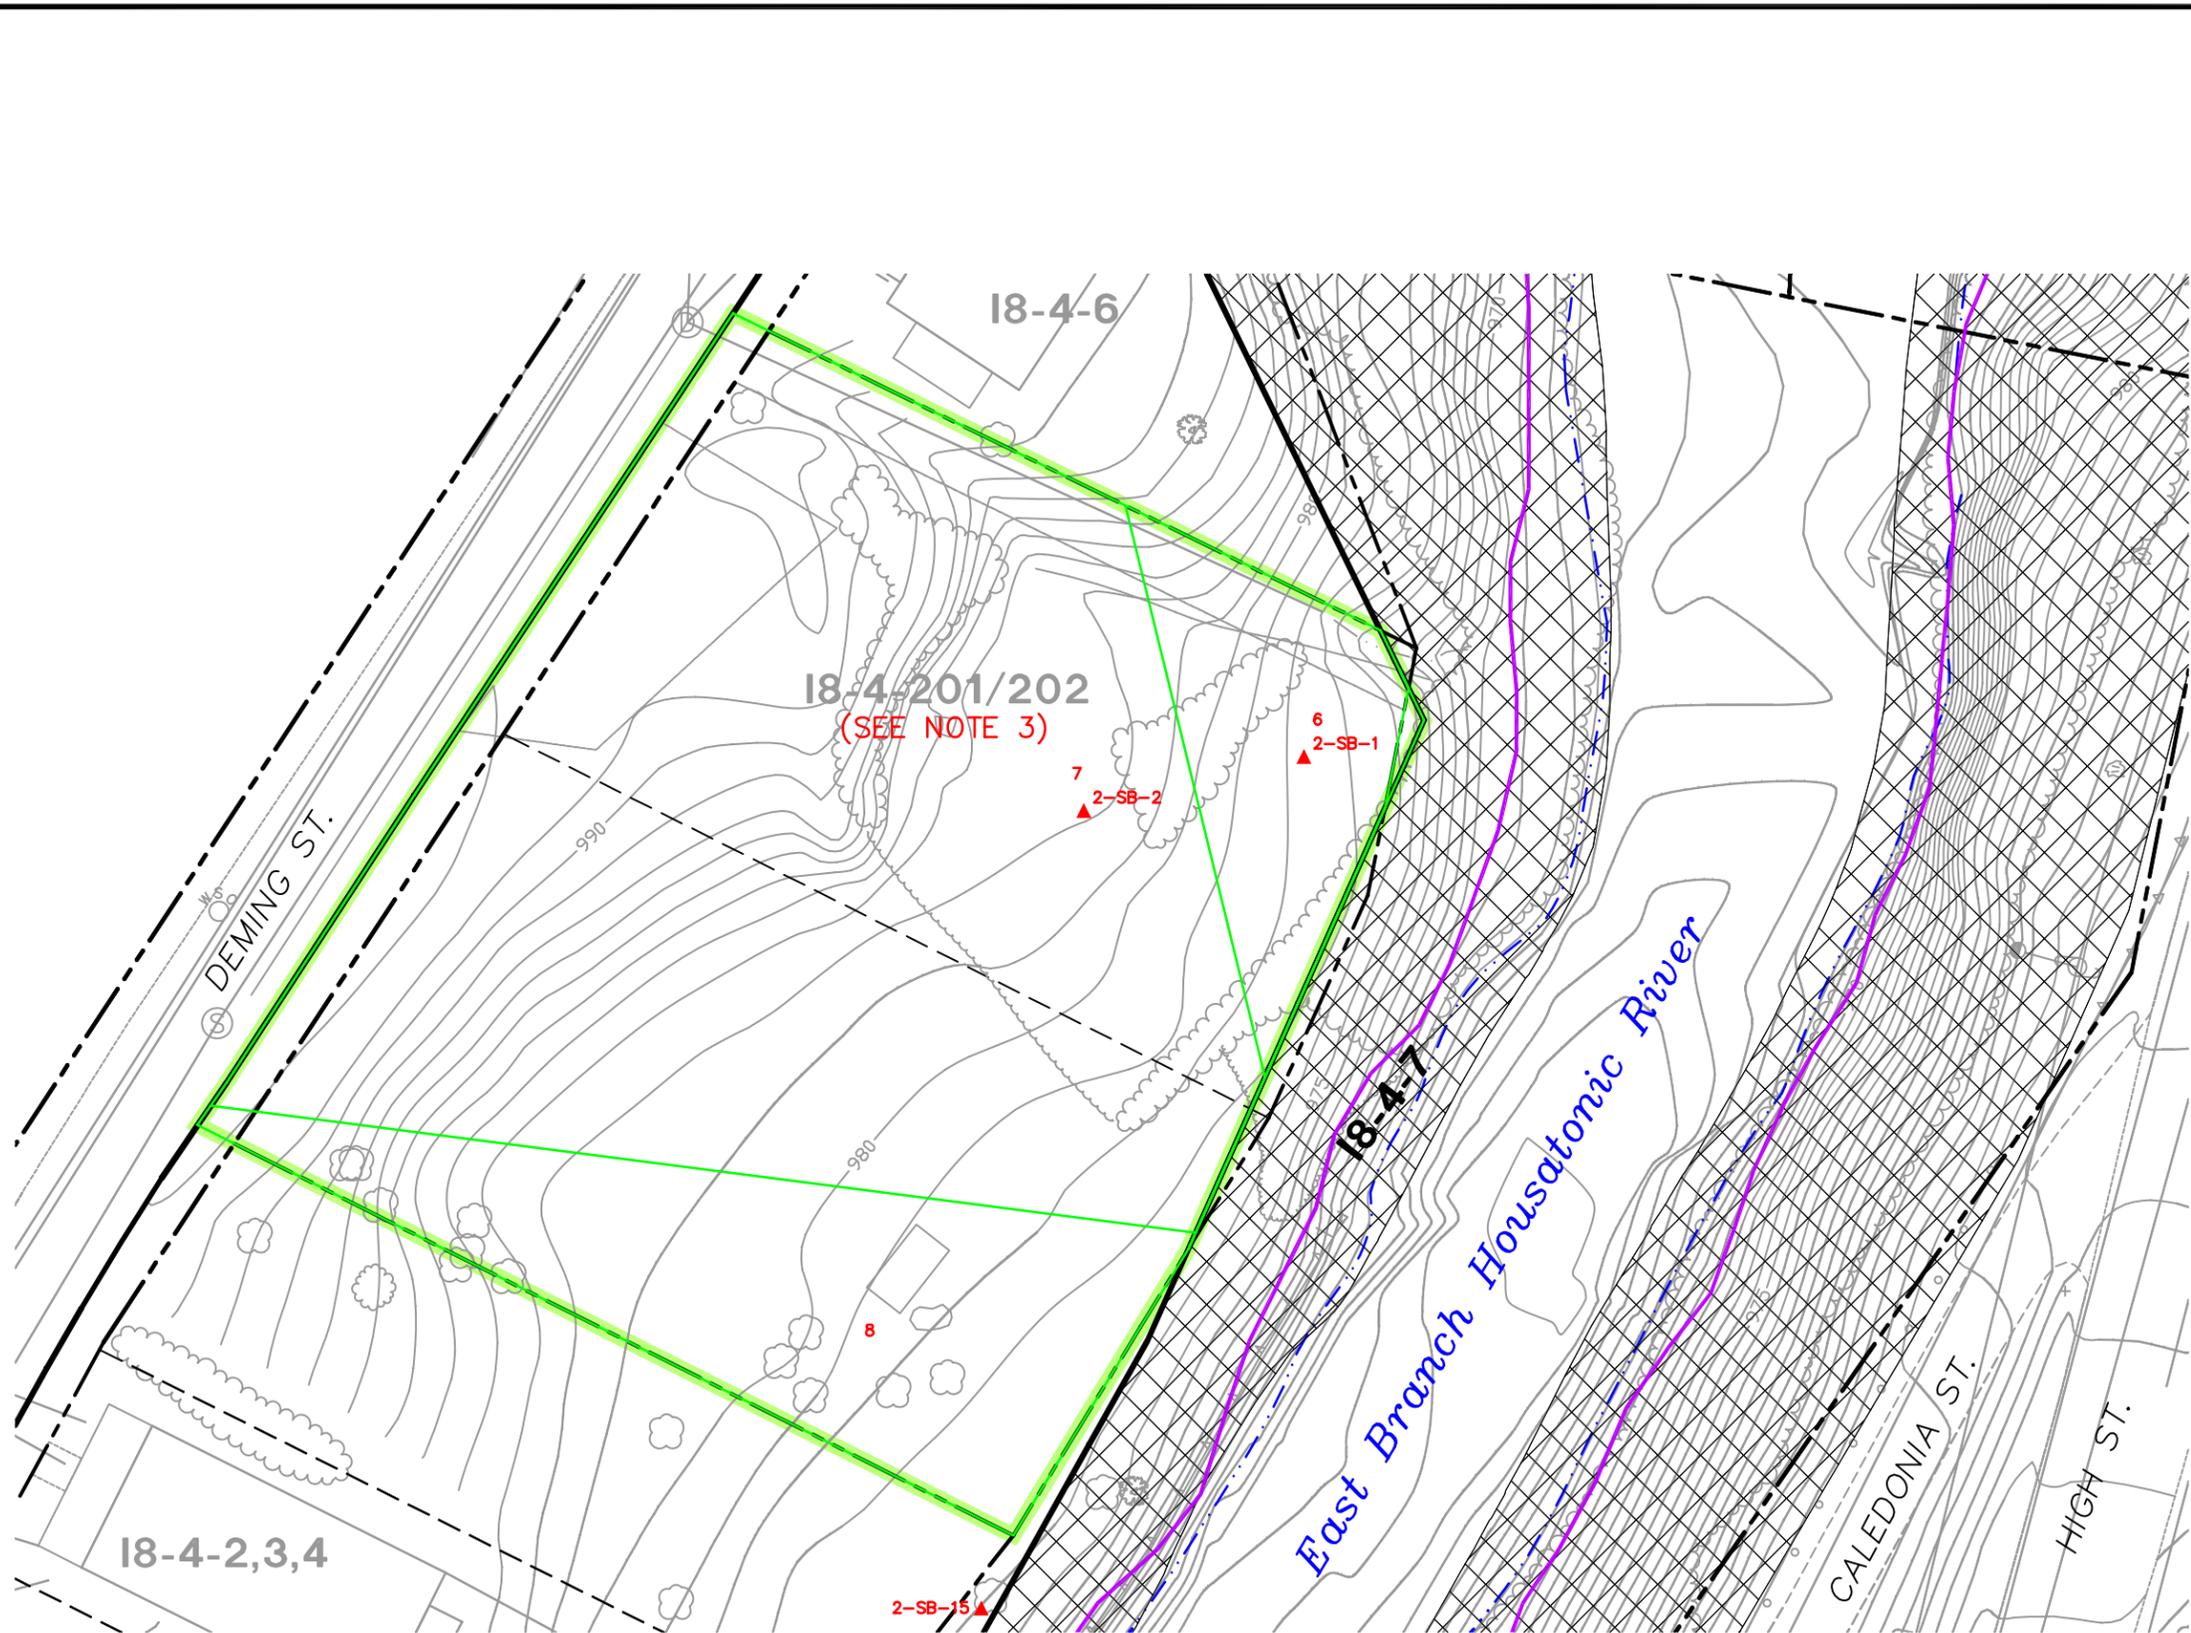

**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-201/202** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 7** POLYGON ID

- NOTES TO FIGURE:**
1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
  2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
  3. FORMER TAX PARCEL 18-4-5 HAS BEEN DIVIDED INTO TWO PARCELS, 18-4-201 AND 18-4-202, THE BOUNDARY BETWEEN THE TWO PARCELS IS APPROXIMATE AND BASED ON THE CITY OF PITTSFIELD ASSESSOR'S OFFICE INFORMATION.
  4. SAMPLE LOCATIONS ARE APPROXIMATE.
  5. SEE FIGURES 5 AND 6 FOR ADDITIONAL INFORMATION RELATED TO PARCELS 18-4-2,3,4 AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**18-4-201/202  
 THEISSEN POLYGON MAP  
 5- TO 7-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE **A-9**

---

## Parcels I8-4-2, -3, -4

**TABLE A-4  
EXISTING CONDITIONS  
PARCELS I8-4-2, -3, & -4: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**0- TO 1-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	1, 1A	37	0 - 1	0.49	1.35	0.49	0.66
I8-4-2,3,4-3	11	323	0 - 0.5	0.64	11.96	0.45	5.32
			0.5 - 1	0.25			
I8-4-2,3,4-4	12	429	0 - 0.5	0.128	15.88	0.09	1.41
			0.5 - 1	0.05			
I8-4-2,3,4-5	13	467	0 - 0.5	0.716	17.28	0.59	10.18
			0.5 - 1	0.462			
I8-4-2,3,4-8	14	157	0 - 0.5	3.31	5.80	3.30	19.11
			0.5 - 1	3.28			
I8-4-2,3,4-9	15	41	0 - 0.5	31.2	1.50	53.35	80.17
			0.5 - 1	75.5			
I8-4-2,3,4-11	4	244	0 - 0.5	0.198	9.05	0.26	2.38
			0.5 - 1	0.327			
I8-4-2,3,4-12	5	11	0 - 0.5	19.6	0.40	10.46	4.15
			0.5 - 1	1.32			
I8-4-2,3,4-13	6	31	0 - 0.5	0.171	1.16	0.11	0.13
			0.5 - 1	0.05			
I8-4-2,3,4-15	7	134	0 - 0.5	0.745	4.95	0.47	2.32
			0.5 - 1	0.193			
I8-4-2,3,4-16	8	42	0 - 0.5	3.27	1.54	2.82	4.36
			0.5 - 1	2.37			
I8-4-2,3,4-18	9	187	0 - 0.5	1.61	6.92	1.13	7.82
			0.5 - 1	0.65			
I8-4-2,3,4-19	10	224	0 - 0.5	5.68	8.29	4.40	36.49
			0.5 - 1	3.12			
R93A000	17	667	0 - 0.5	0.25	24.70	0.28	6.79
			0.5 - 1	0.3			
R93A025	18	565	0 - 0.5	0.25	20.92	0.25	5.23
			0.5 - 1	0.25			
R93A050	19	514	0 - 0.5	0.25	19.02	0.28	5.23
			0.5 - 1	0.3			
R93A075	20	408	0 - 0.5	0.25	15.10	0.25	3.78
			0.5 - 1	0.25			
R93A100	21, 37	721	0 - 0.5	0.7	26.70	0.60	16.02
			0.5 - 1	0.5			
R93A125	38	318	0 - 0.5	0.1485	11.78	0.20	2.35
			0.5 - 1	0.25			
R93B000	22	723	0 - 0.5	10	26.76	5.70	152.54
			0.5 - 1	1.4			
R93B025	23	540	0 - 0.5	1	20.00	0.63	12.50
			0.5 - 1	0.25			
R93B050	24	430	0 - 0.5	0.5	15.94	0.38	5.98
			0.5 - 1	0.25			
R93B075	25	479	0 - 0.5	0.4	17.74	0.28	5.00
			0.5 - 1	0.164			
R93B100	26, 39	762	0 - 0.5	0.25	28.23	0.25	7.06
			0.5 - 1	0.25			
R93B125	40	320	0 - 0.5	27	11.86	51.50	611.03
			0.5 - 1	76			
R93C000	27	630	0 - 0.5	6.6	23.34	3.45	80.51
			0.5 - 1	0.3			
R93C075	28	681	0 - 0.5	1.5	25.22	0.95	23.95
			0.5 - 1	0.4			
R93C100	29, 46, 47	397	0 - 0.5	0.3	14.70	0.33	4.78
			0.5 - 1	0.35			
R93C125	41	280	0 - 0.5	0.3	10.37	0.28	2.85
			0.5 - 1	0.25			

**TABLE A-4  
EXISTING CONDITIONS  
PARCELS I8-4-2, -3, & -4: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**0- TO 1-FOOT DEPTH INCREMENT CONTINUED**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
R93D000	30	635	0 - 0.5	<b>0.25</b>	23.50	0.25	5.88
			0.5 - 1	<b>0.25</b>			
R93D050	31	1,042	0 - 0.5	<b>0.3</b>	38.61	0.28	10.62
			0.5 - 1	<b>0.25</b>			
R93D075	32	450	0 - 0.5	0.4	16.67	0.33	5.42
			0.5 - 1	<b>0.25</b>			
R93D100	43	673	0 - 0.5	<b>0.25</b>	24.94	0.25	6.24
			0.5 - 1	<b>0.25</b>			
R93D125	44	250	0 - 0.5	<b>0.25</b>	9.26	0.25	2.32
			0.5 - 1	<b>0.25</b>			
R93E000	33	324	0 - 0.5	<b>0.3</b>	11.99	0.28	3.30
			0.5 - 1	<b>0.25</b>			
R93E025	34	268	0 - 0.5	<b>0.3</b>	9.93	0.28	2.73
			0.5 - 1	<b>0.25</b>			
R93E050	35	166	0 - 0.5	0.1395	6.15	0.22	1.35
			0.5 - 1	<b>0.3</b>			
R93E075	36	66	0 - 0.5	0.6	2.46	0.45	1.11
			0.5 - 1	<b>0.3</b>			
R93E100	45	5	0 - 0.5	<b>0.3</b>	0.20	0.28	0.05
			0.5 - 1	<b>0.25</b>			
<b>Totals:</b>	--	14,640	--	--	542.22	--	1,159.13
					<b>Volume Weighted Average:</b>		<b>2.14</b>

**Notes:**

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.

**TABLE A-5  
EXISTING CONDITIONS  
PARCELS I8-4-2, -3, & -4: 1- TO X-FOOT (X=5) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

1- TO 1.5-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	1	37	1 - 1.5	0.068	0.68	0.07	0.05
I8-4-2,3,4-2	13	137	1 - 1.5	13.1	2.53	13.10	33.12
I8-4-2,3,4-5	14	488	1 - 1.5	0.349	9.04	0.35	3.15
I8-4-2,3,4-6	15	20	1 - 1.5	1.06	0.38	1.06	0.40
I8-4-2,3,4-7	16	74	1 - 1.5	6.9	1.37	6.90	9.47
I8-4-2,3,4-8	17	222	1 - 1.5	0.724	4.12	0.72	2.98
I8-4-2,3,4-9	18	82	1 - 1.5	30.4	1.52	30.40	46.11
I8-4-2,3,4-10	4	1	1 - 1.5	798	0.01	798.00	11.62
I8-4-2,3,4-12	5	260	1 - 1.5	0.408	4.81	0.41	1.96
I8-4-2,3,4-13	6	333	1 - 1.5	0.05	6.17	0.05	0.31
I8-4-2,3,4-14	7	92	1 - 1.5	0.05	1.71	0.05	0.09
I8-4-2,3,4-15	8	181	1 - 1.5	0.05	3.35	0.05	0.17
I8-4-2,3,4-16	9	122	1 - 1.5	0.173	2.27	0.17	0.39
I8-4-2,3,4-17	10	96	1 - 1.5	1.12	1.78	1.12	1.99
I8-4-2,3,4-18	11	372	1 - 1.5	0.185	6.89	0.19	1.27
I8-4-2,3,4-19	12	334	1 - 1.5	0.05	6.19	0.05	0.31
R93A000	20	667	1 - 1.5	0.35	12.35	0.35	4.32
R93A025	21	565	1 - 1.5	0.25	10.46	0.25	2.62
R93A050	22	581	1 - 1.5	0.3	10.75	0.30	3.23
R93A075	23	441	1 - 1.5	0.25	8.16	0.25	2.04
R93A100	24, 42	492	1 - 1.5	0.35	9.11	0.35	3.19
R93A125	43	318	1 - 1.5	0.25	5.89	0.25	1.47
R93B000	25	723	1 - 1.5	0.3	13.38	0.30	4.01
R93B025	26	540	1 - 1.5	0.3	10.00	0.30	3.00
R93B050	27	578	1 - 1.5	0.25	10.71	0.25	2.68
R93B075	28	638	1 - 1.5	0.3	11.82	0.30	3.55
R93B100	29, 44	452	1 - 1.5	0.25	8.38	0.25	2.09
R93B125	45	320	1 - 1.5	53	5.93	53.00	314.43
R93C000	30	630	1 - 1.5	0.25	11.67	0.25	2.92
R93C075	31	723	1 - 1.5	0.3	13.39	0.30	4.02
R93C100	32, 49, 50	227	1 - 1.5	0.181	4.20	0.18	0.76
R93C125	33, 46	244	1 - 1.5	0.25	4.52	0.25	1.13
R93D000	34	635	1 - 1.5	0.3	11.75	0.30	3.53
R93D050	35	1,042	1 - 1.5	0.25	19.31	0.25	4.83
R93D075	36	619	1 - 1.5	0.3	11.45	0.30	3.44
R93D100	37, 51, 53	335	1 - 1.5	0.25	6.20	0.25	1.55
R93D125	47	193	1 - 1.5	0.3	3.58	0.30	1.07
R93E000	38	324	1 - 1.5	0.3	6.00	0.30	1.80
R93E025	39	268	1 - 1.5	0.3	4.96	0.30	1.49
R93E050	40	166	1 - 1.5	0.3	3.08	0.30	0.92
R93E075	41	66	1 - 1.5	0.25	1.23	0.25	0.31
R93E100	48	1	1 - 1.5	0.25	0.01	0.25	0.00
<b>Totals:</b>	--	14,640	--	--	271.11	--	487.77
<b>Volume Weighted Average:</b>							<b>1.80</b>

1.5- TO 2-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	1	37	1.5 - 2	0.068	0.68	0.07	0.05
I8-4-2,3,4-2	10	327	1.5 - 2	1.44	6.06	1.44	8.72
I8-4-2,3,4-5	11	493	1.5 - 2	0.146	9.12	0.15	1.33
I8-4-2,3,4-6	12	20	1.5 - 2	46.1	0.38	46.10	17.41
I8-4-2,3,4-7	13	74	1.5 - 2	9.8	1.37	9.80	13.45

**TABLE A-5  
EXISTING CONDITIONS  
PARCELS I8-4-2, -3, & -4: 1- TO X-FOOT (X=5) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**1.5- TO 2-FOOT DEPTH INCREMENT CONTINUED**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
I8-4-2,3,4-8	14	302	1.5 - 2	0.05	5.59	0.05	0.28
I8-4-2,3,4-9	46	431	1.5 - 2	3.33	7.99	3.33	26.60
I8-4-2,3,4-10	5	1	1.5 - 2	195	0.01	195.00	2.85
I8-4-2,3,4-12	6	261	1.5 - 2	0.116	4.84	0.12	0.56
I8-4-2,3,4-13	7	333	1.5 - 2	0.05	6.17	0.05	0.31
I8-4-2,3,4-14	8	93	1.5 - 2	0.05	1.73	0.05	0.09
I8-4-2,3,4-15	9	216	1.5 - 2	0.05	3.99	0.05	0.20
R93A000	16	667	1.5 - 2	0.25	12.35	0.25	3.09
R93A025	17	565	1.5 - 2	0.25	10.46	0.25	2.62
R93A050	18	581	1.5 - 2	0.25	10.75	0.25	2.69
R93A075	19	441	1.5 - 2	0.3	8.16	0.30	2.45
R93A100	20, 38	492	1.5 - 2	0.3	9.11	0.30	2.73
R93A125	39	318	1.5 - 2	0.25	5.89	0.25	1.47
R93B000	21	723	1.5 - 2	0.3	13.38	0.30	4.01
R93B025	22	540	1.5 - 2	0.25	10.00	0.25	2.50
R93B050	23	578	1.5 - 2	0.25	10.71	0.25	2.68
R93B075	24	701	1.5 - 2	0.3	12.99	0.30	3.90
R93B100	25, 40	640	1.5 - 2	0.25	11.85	0.25	2.96
R93B125	41	320	1.5 - 2	8.2	5.93	8.20	48.65
R93C000	26	630	1.5 - 2	0.3	11.67	0.30	3.50
R93C075	27	776	1.5 - 2	0.25	14.37	0.25	3.59
R93C100	28, 42	352	1.5 - 2	0.35	6.52	0.35	2.28
R93C125	29, 43	244	1.5 - 2	0.25	4.52	0.25	1.13
R93D000	30	635	1.5 - 2	0.25	11.75	0.25	2.94
R93D050	31	1,042	1.5 - 2	0.3	19.31	0.30	5.79
R93D075	32	648	1.5 - 2	0.3	12.00	0.30	3.60
R93D100	33, 47	242	1.5 - 2	0.1335	4.48	0.13	0.60
R93D125	44	93	1.5 - 2	0.6	1.71	0.60	1.03
R93E000	34	324	1.5 - 2	0.25	6.00	0.25	1.50
R93E025	35	268	1.5 - 2	0.3	4.96	0.30	1.49
R93E050	36	166	1.5 - 2	0.25	3.08	0.25	0.77
R93E075	37	66	1.5 - 2	0.3	1.23	0.30	0.37
<b>Totals:</b>	--	14,640	--	--	271.11	--	180.17
<b>Volume Weighted Average:</b>							<b>0.66</b>

**2- TO 2.5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	1, 15, 16	4,003	2 - 2.5	0.068	74.12	0.07	5.04
2-SB-16	13	1,398	2 - 2.5	0.219	25.89	0.22	5.67
I8-4-1-5	2	44	2 - 2.5	0.251	0.81	0.25	0.20
I8-4-1-9	4	247	2 - 2.5	0.408	4.57	0.41	1.87
I8-4-2,3,4-2	8	360	2 - 2.5	1.37	6.67	1.37	9.14
I8-4-2,3,4-6	9	309	2 - 2.5	10.4	5.72	10.40	59.47
I8-4-2,3,4-7	10	834	2 - 2.5	10.3	15.45	10.30	159.10
I8-4-2,3,4-9	14	4,748	2 - 2.5	3.54	87.93	3.54	311.28
I8-4-2,3,4-10	5	1	2 - 2.5	24.8	0.01	24.80	0.36
I8-4-2,3,4-12	6	1,991	2 - 2.5	1.17	36.87	1.17	43.13
I8-4-2,3,4-14	7	631	2 - 2.5	0.112	11.68	0.11	1.31
I8-4-5-4	11	35	2 - 2.5	1.34	0.65	1.34	0.87
I8-4-7-21	12	40	2 - 2.5	8.17	0.75	8.17	6.11
<b>Totals:</b>	--	14,640	--	--	271.11	--	603.55
<b>Volume Weighted Average:</b>							<b>2.23</b>

**TABLE A-5  
EXISTING CONDITIONS  
PARCELS I8-4-2, -3, & -4: 1- TO X-FOOT (X=5) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**2.5- TO 3-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	1	3,990	2.5 - 3	0.068	73.88	0.07	5.02
2-SB-16	13	837	2.5 - 3	0.219	15.50	0.22	3.39
I8-4-1-9	3	290	2.5 - 3	0.356	5.37	0.36	1.91
I8-4-2,3,4-1	4	2	2.5 - 3	14.5	0.05	14.50	0.65
I8-4-2,3,4-2	8	360	2.5 - 3	3.45	6.67	3.45	23.02
I8-4-2,3,4-6	9	492	2.5 - 3	4.64	9.12	4.64	42.31
I8-4-2,3,4-7	10	1,032	2.5 - 3	4.48	19.12	4.48	85.64
I8-4-2,3,4-9	15	4,749	2.5 - 3	4.87	87.94	4.87	428.27
I8-4-2,3,4-10	5	1	2.5 - 3	78.7	0.02	78.70	1.70
I8-4-2,3,4-12	6	2,102	2.5 - 3	0.5	38.93	0.50	19.46
I8-4-2,3,4-14	7	631	2.5 - 3	0.05	11.68	0.05	0.58
I8-4-5-4	11	88	2.5 - 3	0.05	1.63	0.05	0.08
I8-4-7-21	12	65	2.5 - 3	5.34	1.21	5.34	6.46
<b>Totals:</b>	--	14,640	--	--	271.10	--	618.52
<b>Volume Weighted Average:</b>							<b>2.28</b>

**3- TO 3.5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	3	4,403	3 - 3.5	0.032	81.54	0.03	2.61
2-SB-13	1, 18, 19	686	3 - 3.5	0.097	12.71	0.10	1.23
2-SB-16	10	500	3 - 3.5	0.027	9.27	0.03	0.25
I8-4-1-7	6	32	3 - 3.5	15.8	0.59	15.80	9.28
I8-4-2,3,4-1	12	877	3 - 3.5	12.4	16.24	12.40	201.35
I8-4-2,3,4-6	14	1,331	3 - 3.5	8.2	24.65	8.20	202.16
I8-4-2,3,4-9	15	6,486	3 - 3.5	0.18	120.12	0.18	21.62
I8-4-2,3,4-10	7	119	3 - 3.5	14.605	2.20	14.61	32.13
I8-4-7-21	8	205	3 - 3.5	1.99	3.79	1.99	7.54
<b>Totals:</b>	--	14,640	--	--	271.11	--	478.18
<b>Volume Weighted Average:</b>							<b>1.76</b>

**3.5- TO 4-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	3	4,403	3.5 - 4	0.032	81.54	0.03	2.61
2-SB-13	1, 13	538	3.5 - 4	0.097	9.97	0.10	0.97
2-SB-16	5A	2	3.5 - 4	0.027	0.03	0.03	0.00
I8-4-1-7	6	32	3.5 - 4	11.6	0.59	11.60	6.81
I8-4-2,3,4-1	7	1,087	3.5 - 4	1.84	20.13	1.84	37.03
I8-4-2,3,4-6	9	1,539	3.5 - 4	1.3	28.49	1.30	37.04
I8-4-2,3,4-9	14	6,486	3.5 - 4	3.85	120.12	3.85	462.46
I8-4-2,3,4-10	8	119	3.5 - 4	28.5	2.20	28.50	62.70
I8-4,2,3,4-20	5	143	3.5 - 4	4.87	2.65	4.87	12.90
I8-4-7-4	11	85	3.5 - 4	83.2	1.57	83.20	130.21
I8-4-7-21	10	207	3.5 - 4	6.58	3.83	6.58	25.18
<b>Totals:</b>	--	14,640	--	--	271.11	--	777.92
<b>Volume Weighted Average:</b>							<b>2.87</b>

**TABLE A-5  
EXISTING CONDITIONS  
PARCELS I8-4-2, -3, & -4: 1- TO X-FOOT (X=5) DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**4- TO 5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	4	4,403	4 - 5	0.032	163.09	0.03	5.22
2-SB-13	1	460	4 - 5	0.097	17.02	0.10	1.65
2-SB-15	2	115	4 - 5	0.032	4.25	0.03	0.14
2-SB-16	2A	12	4 - 5	0.027	0.45	0.03	0.01
I8-4-1-7	6	32	4 - 4.5	2.4	1.17	5.08	5.96
			4.5 - 5	7.75			
I8-4-2,3,4-1	7	1,087	4 - 4.5	3.12	40.25	1.97	79.48
			4.5 - 5	0.829			
I8-4-2,3,4-6	9	1,556	4 - 4.5	0.129	57.65	0.36	20.84
			4.5 - 5	0.594			
I8-4-2,3,4-9	13	6,486	4 - 4.5	0.563	240.24	0.90	215.37
			4.5 - 5	1.23			
I8-4-2,3,4-10	8	197	4 - 4.5	1.19	7.31	3.05	22.30
			4.5 - 5	4.91			
I8-4-7-4	11	85	4 - 4.5	11.5	3.13	6.99	21.86
			4.5 - 5	2.47			
I8-4-7-21	10	207	4 - 4.5	3.64	7.65	2.47	18.91
			4.5 - 5	1.3			
<b>Totals:</b>	--	14,640	--	--	542.22	--	391.74
<b>Volume Weighted Average:</b>							<b>0.72</b>

**SUMMARY - 1- TO X-FOOT (X=5) DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	14,640	--	--	2,168.89	--	3,537.84
<b>Volume Weighted Average:</b>							<b>1.63</b>

**Notes:**

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.

**TABLE A-6  
POST-REMEDATION CONDITIONS  
PARCELS I8-4-2, -3, & -4: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**0- TO 1-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-6	1, 1A	37	0 - 1	0.49	1.35	0.49	0.66
I8-4-2,3,4-3	11	323	0 - 0.5	0.64	11.96	0.45	5.32
			0.5 - 1	0.25			
I8-4-2,3,4-4	12	429	0 - 0.5	0.128	15.88	0.09	1.41
			0.5 - 1	0.05			
I8-4-2,3,4-5	13	467	0 - 0.5	0.716	17.28	0.59	10.18
			0.5 - 1	0.462			
I8-4-2,3,4-8	14	157	0 - 0.5	3.31	5.80	3.30	19.11
			0.5 - 1	3.28			
I8-4-2,3,4-9	15	41	0 - 0.5	0.021	1.50	0.02	0.03
			0.5 - 1	0.021			
I8-4-2,3,4-11	4	244	0 - 0.5	0.198	9.05	0.26	2.38
			0.5 - 1	0.327			
I8-4-2,3,4-12	5	11	0 - 0.5	0.021	0.40	0.02	0.01
			0.5 - 1	0.021			
I8-4-2,3,4-13	6	31	0 - 0.5	0.171	1.16	0.11	0.13
			0.5 - 1	0.05			
I8-4-2,3,4-15	7	134	0 - 0.5	0.745	4.95	0.47	2.32
			0.5 - 1	0.193			
I8-4-2,3,4-16	8	42	0 - 0.5	3.27	1.54	2.82	4.36
			0.5 - 1	2.37			
I8-4-2,3,4-18	9	187	0 - 0.5	1.61	6.92	1.13	7.82
			0.5 - 1	0.65			
I8-4-2,3,4-19	10	224	0 - 0.5	5.68	8.29	4.40	36.49
			0.5 - 1	3.12			
R93A000	17	667	0 - 0.5	0.25	24.70	0.28	6.79
			0.5 - 1	0.3			
R93A025	18	565	0 - 0.5	0.25	20.92	0.25	5.23
			0.5 - 1	0.25			
R93A050	19	514	0 - 0.5	0.25	19.02	0.28	5.23
			0.5 - 1	0.3			
R93A075	20	408	0 - 0.5	0.25	15.10	0.25	3.78
			0.5 - 1	0.25			
R93A100	21, 37	721	0 - 0.5	0.7	26.70	0.60	16.02
			0.5 - 1	0.5			
R93A125	38	318	0 - 0.5	0.1485	11.78	0.20	2.35
			0.5 - 1	0.25			
R93B000	22	723	0 - 0.5	10	26.76	5.70	152.54
			0.5 - 1	1.4			
R93B025	23	540	0 - 0.5	1	20.00	0.63	12.50
			0.5 - 1	0.25			
R93B050	24	430	0 - 0.5	0.5	15.94	0.38	5.98
			0.5 - 1	0.25			
R93B075	25	479	0 - 0.5	0.4	17.74	0.28	5.00
			0.5 - 1	0.164			
R93B100	26, 39	762	0 - 0.5	0.25	28.23	0.25	7.06
			0.5 - 1	0.25			
R93B125	40	320	0 - 0.5	0.021	11.86	0.02	0.25
			0.5 - 1	0.021			
R93C000	27	630	0 - 0.5	6.6	23.34	3.45	80.51
			0.5 - 1	0.3			
R93C075	28	681	0 - 0.5	1.5	25.22	0.95	23.95
			0.5 - 1	0.4			
R93C100	29, 46, 47	397	0 - 0.5	0.3	14.70	0.33	4.78
			0.5 - 1	0.35			
R93C125	41	280	0 - 0.5	0.3	10.37	0.28	2.85
			0.5 - 1	0.25			

**TABLE A-6  
POST-REMEDATION CONDITIONS  
PARCELS 18-4-2, -3, & -4: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**


**0- TO 1-FOOT DEPTH INCREMENT CONTINUED**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
R93D000	30	635	0 - 0.5	<b>0.25</b>	23.50	0.25	5.88
			0.5 - 1	<b>0.25</b>			
R93D050	31	1,042	0 - 0.5	<b>0.3</b>	38.61	0.28	10.62
			0.5 - 1	<b>0.25</b>			
R93D075	32	450	0 - 0.5	0.4	16.67	0.33	5.42
			0.5 - 1	<b>0.25</b>			
R93D100	43	673	0 - 0.5	<b>0.25</b>	24.94	0.25	6.24
			0.5 - 1	<b>0.25</b>			
R93D125	44	250	0 - 0.5	<b>0.25</b>	9.26	0.25	2.32
			0.5 - 1	<b>0.25</b>			
R93E000	33	324	0 - 0.5	<b>0.3</b>	11.99	0.28	3.30
			0.5 - 1	<b>0.25</b>			
R93E025	34	268	0 - 0.5	<b>0.3</b>	9.93	0.28	2.73
			0.5 - 1	<b>0.25</b>			
R93E050	35	166	0 - 0.5	0.1395	6.15	0.22	1.35
			0.5 - 1	<b>0.3</b>			
R93E075	36	66	0 - 0.5	0.6	2.46	0.45	1.11
			0.5 - 1	<b>0.3</b>			
R93E100	45	5	0 - 0.5	<b>0.3</b>	0.20	0.28	0.05
			0.5 - 1	<b>0.25</b>			
<b>Totals:</b>	--	14,640	--	--	542.22	--	464.06
					<b>Volume Weighted Average:</b>		<b>0.86</b>

**Notes:**

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.
4. Shaded numbers in bold and italics represent the placement of clean backfill material following the performance of the proposed remediation. The backfill concentration corresponds to the average PCB concentration as presented in the CD Sites Backfill Data Set.

SYR-85-NES KLS DMW LAYER: ON=\*, OFF=\*REF, ICL River\*, ITEXT 40scale, I WATER\_RIVER, ISHD-PARCEL, SHD-PARCEL  
 G:\GE\_ACTIVE\N\40122004 PHASE2 ADDENDUM\40122G14.DWG SAVER:12/12/2006 8:35 AM LAYOUT:1 PAGES:1  
 PROJECTNAME: IMAGES: 40122X03 40122X04  
 PENTABLE: PLTFULLCTB PRINTED:12/12/2006 9:27 AM BY: DWDARCZYK

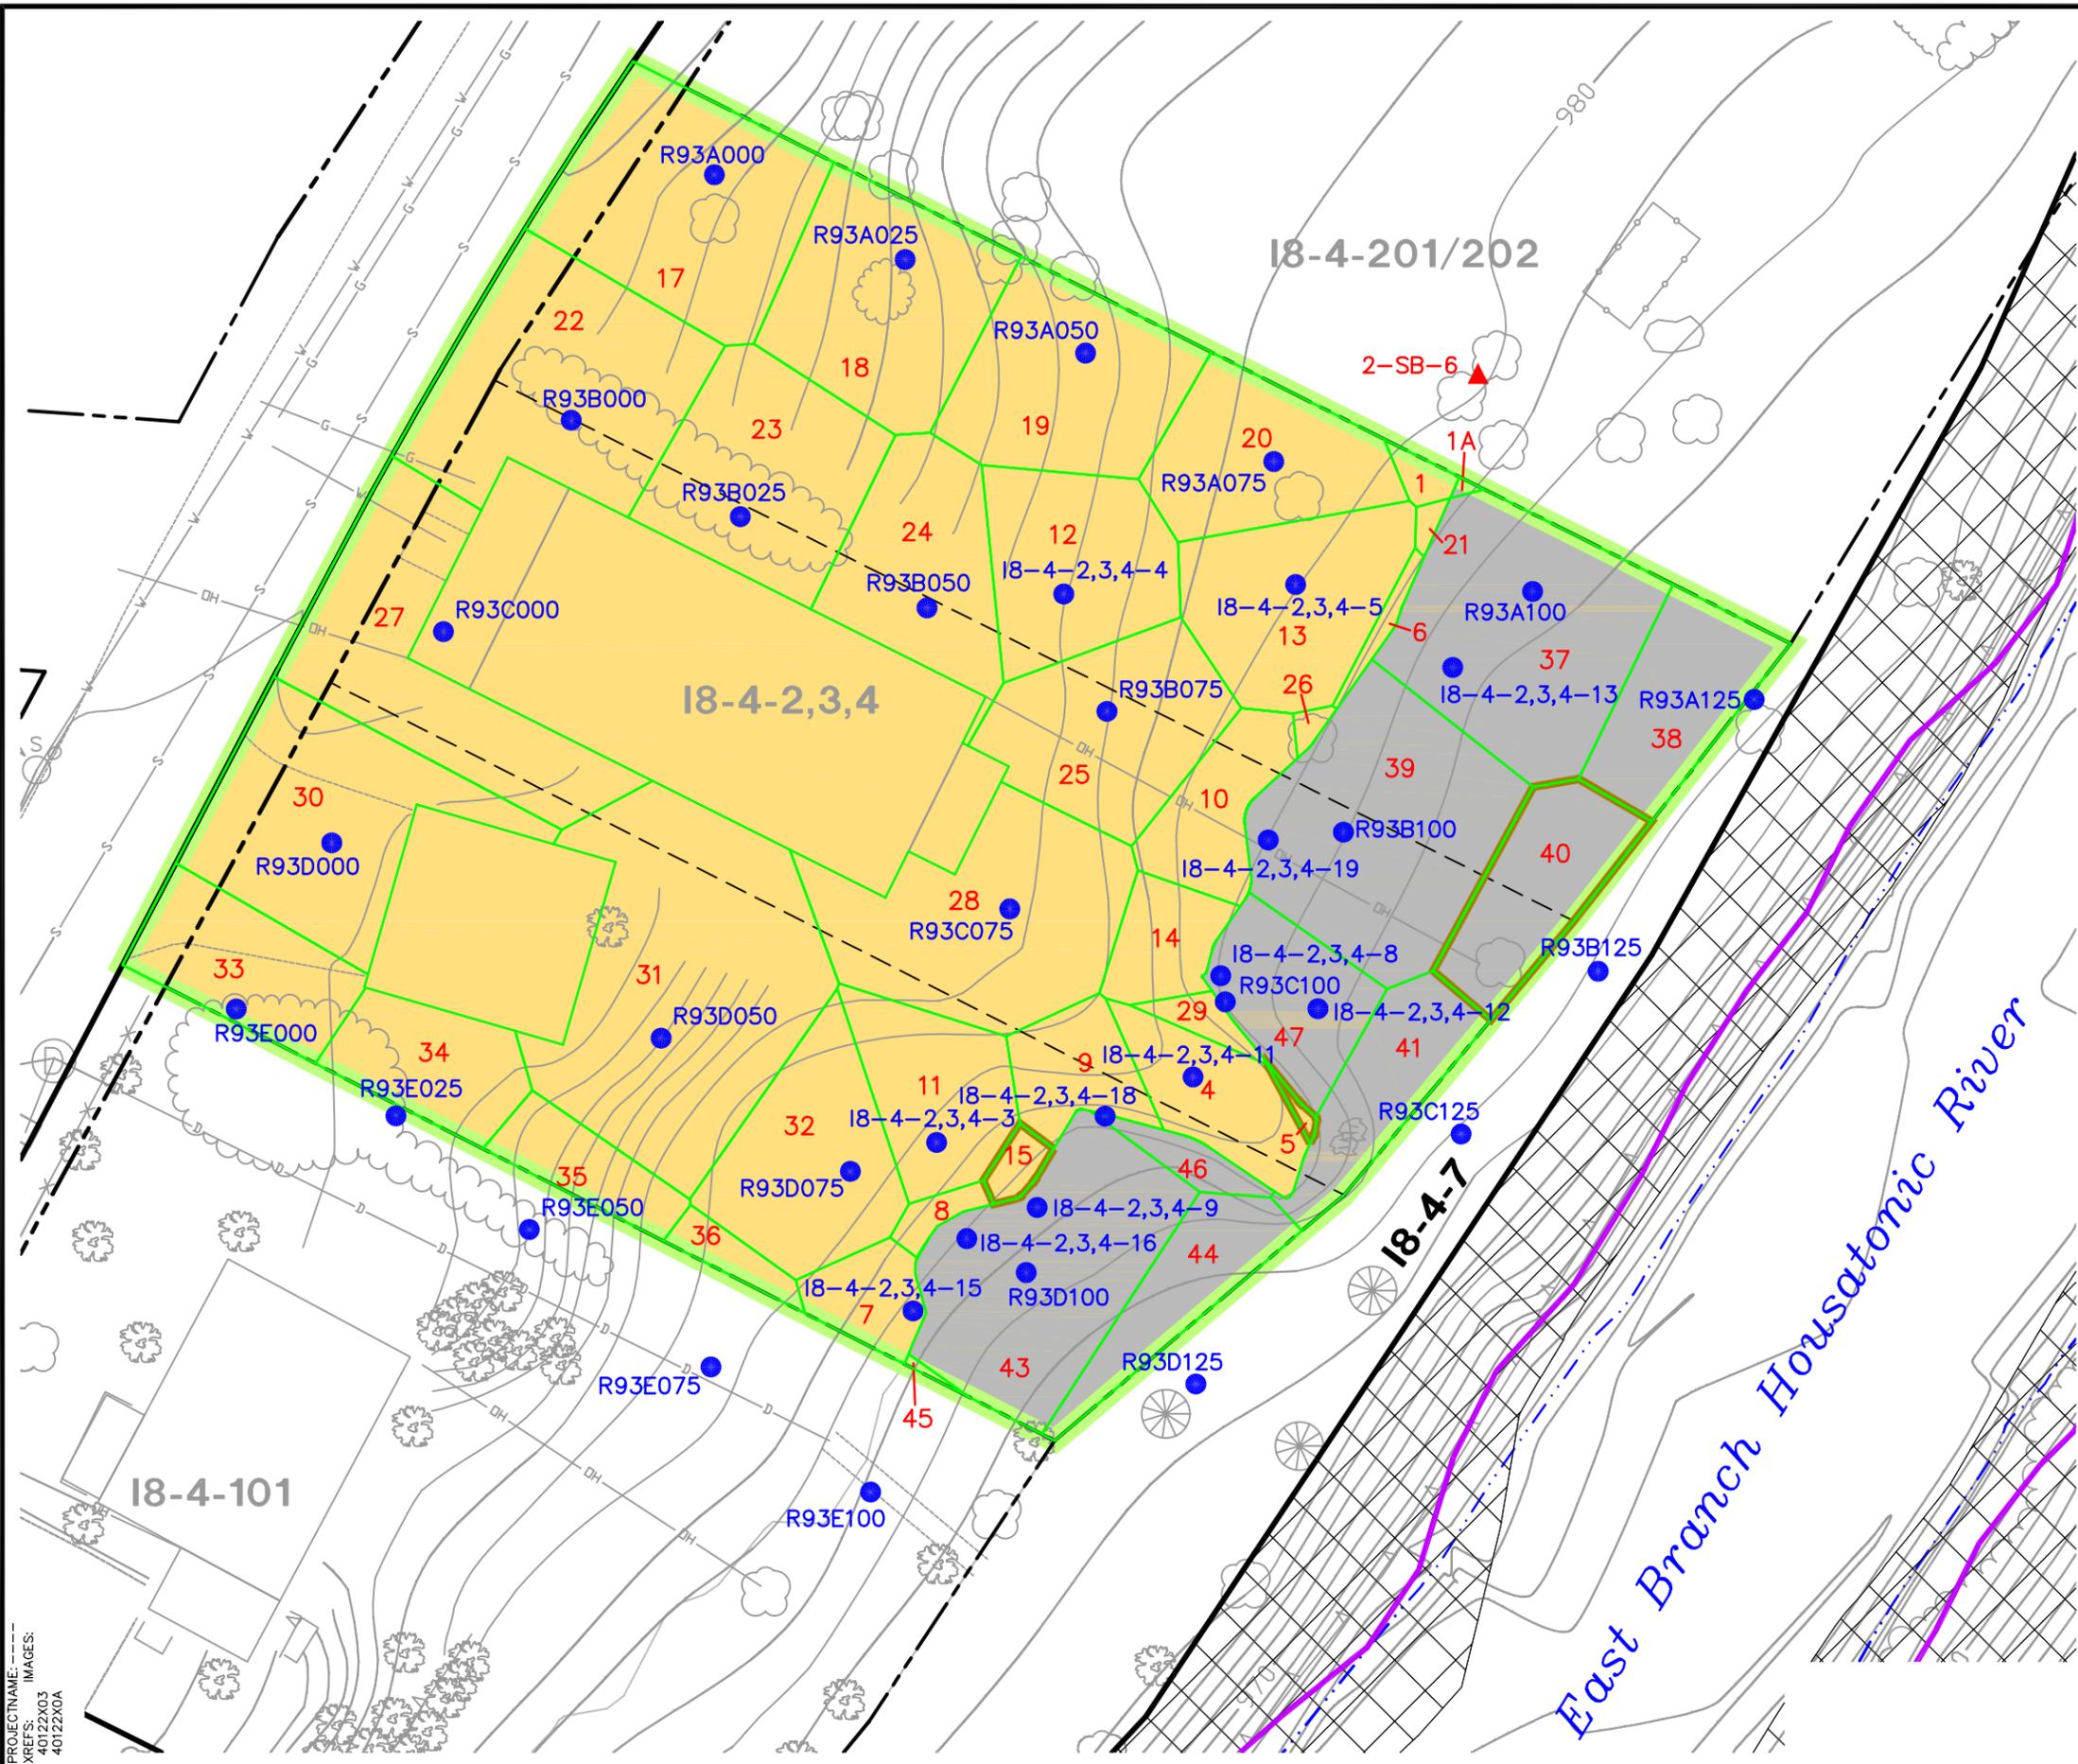


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- - - - - APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- - - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-9 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SB-6 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- × × × × WIRE FENCE
- ○ ○ ○ CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 15 POLYGON ID
- AREA PROPOSED FOR SOIL REMOVAL

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURES 4, 5, AND 6 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-201/202, 18-4-101, AND 18-4-7, RESPECTIVELY.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN**  
**ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**  
**PARCELS 18-4-2, -3, -4**  
**THEISSEN POLYGON MAP**  
**0- TO 1-FOOT DEPTH INCREMENT**

  
 an ARCADIS company

FIGURE  
**A-10**

SYR-85-NES KLS DMW LAYER: ON=\* OFF=\*REF, ICL River, ICL River\_STALBL, ITEXT 40scale, IWATER\_RIVER, \*SHD=PARCEL  
 G:\GE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122G15.DWG SAVER:12/12/2006 8:36 AM LAYOUT:2 PAGES:2  
 PROJECTNAME: IMAGES: 40122X03 40122X0A  
 PENTABLE: PLTFULLCTB PRINTED:12/12/2006 9:26 AM BY: DWODARCZYK

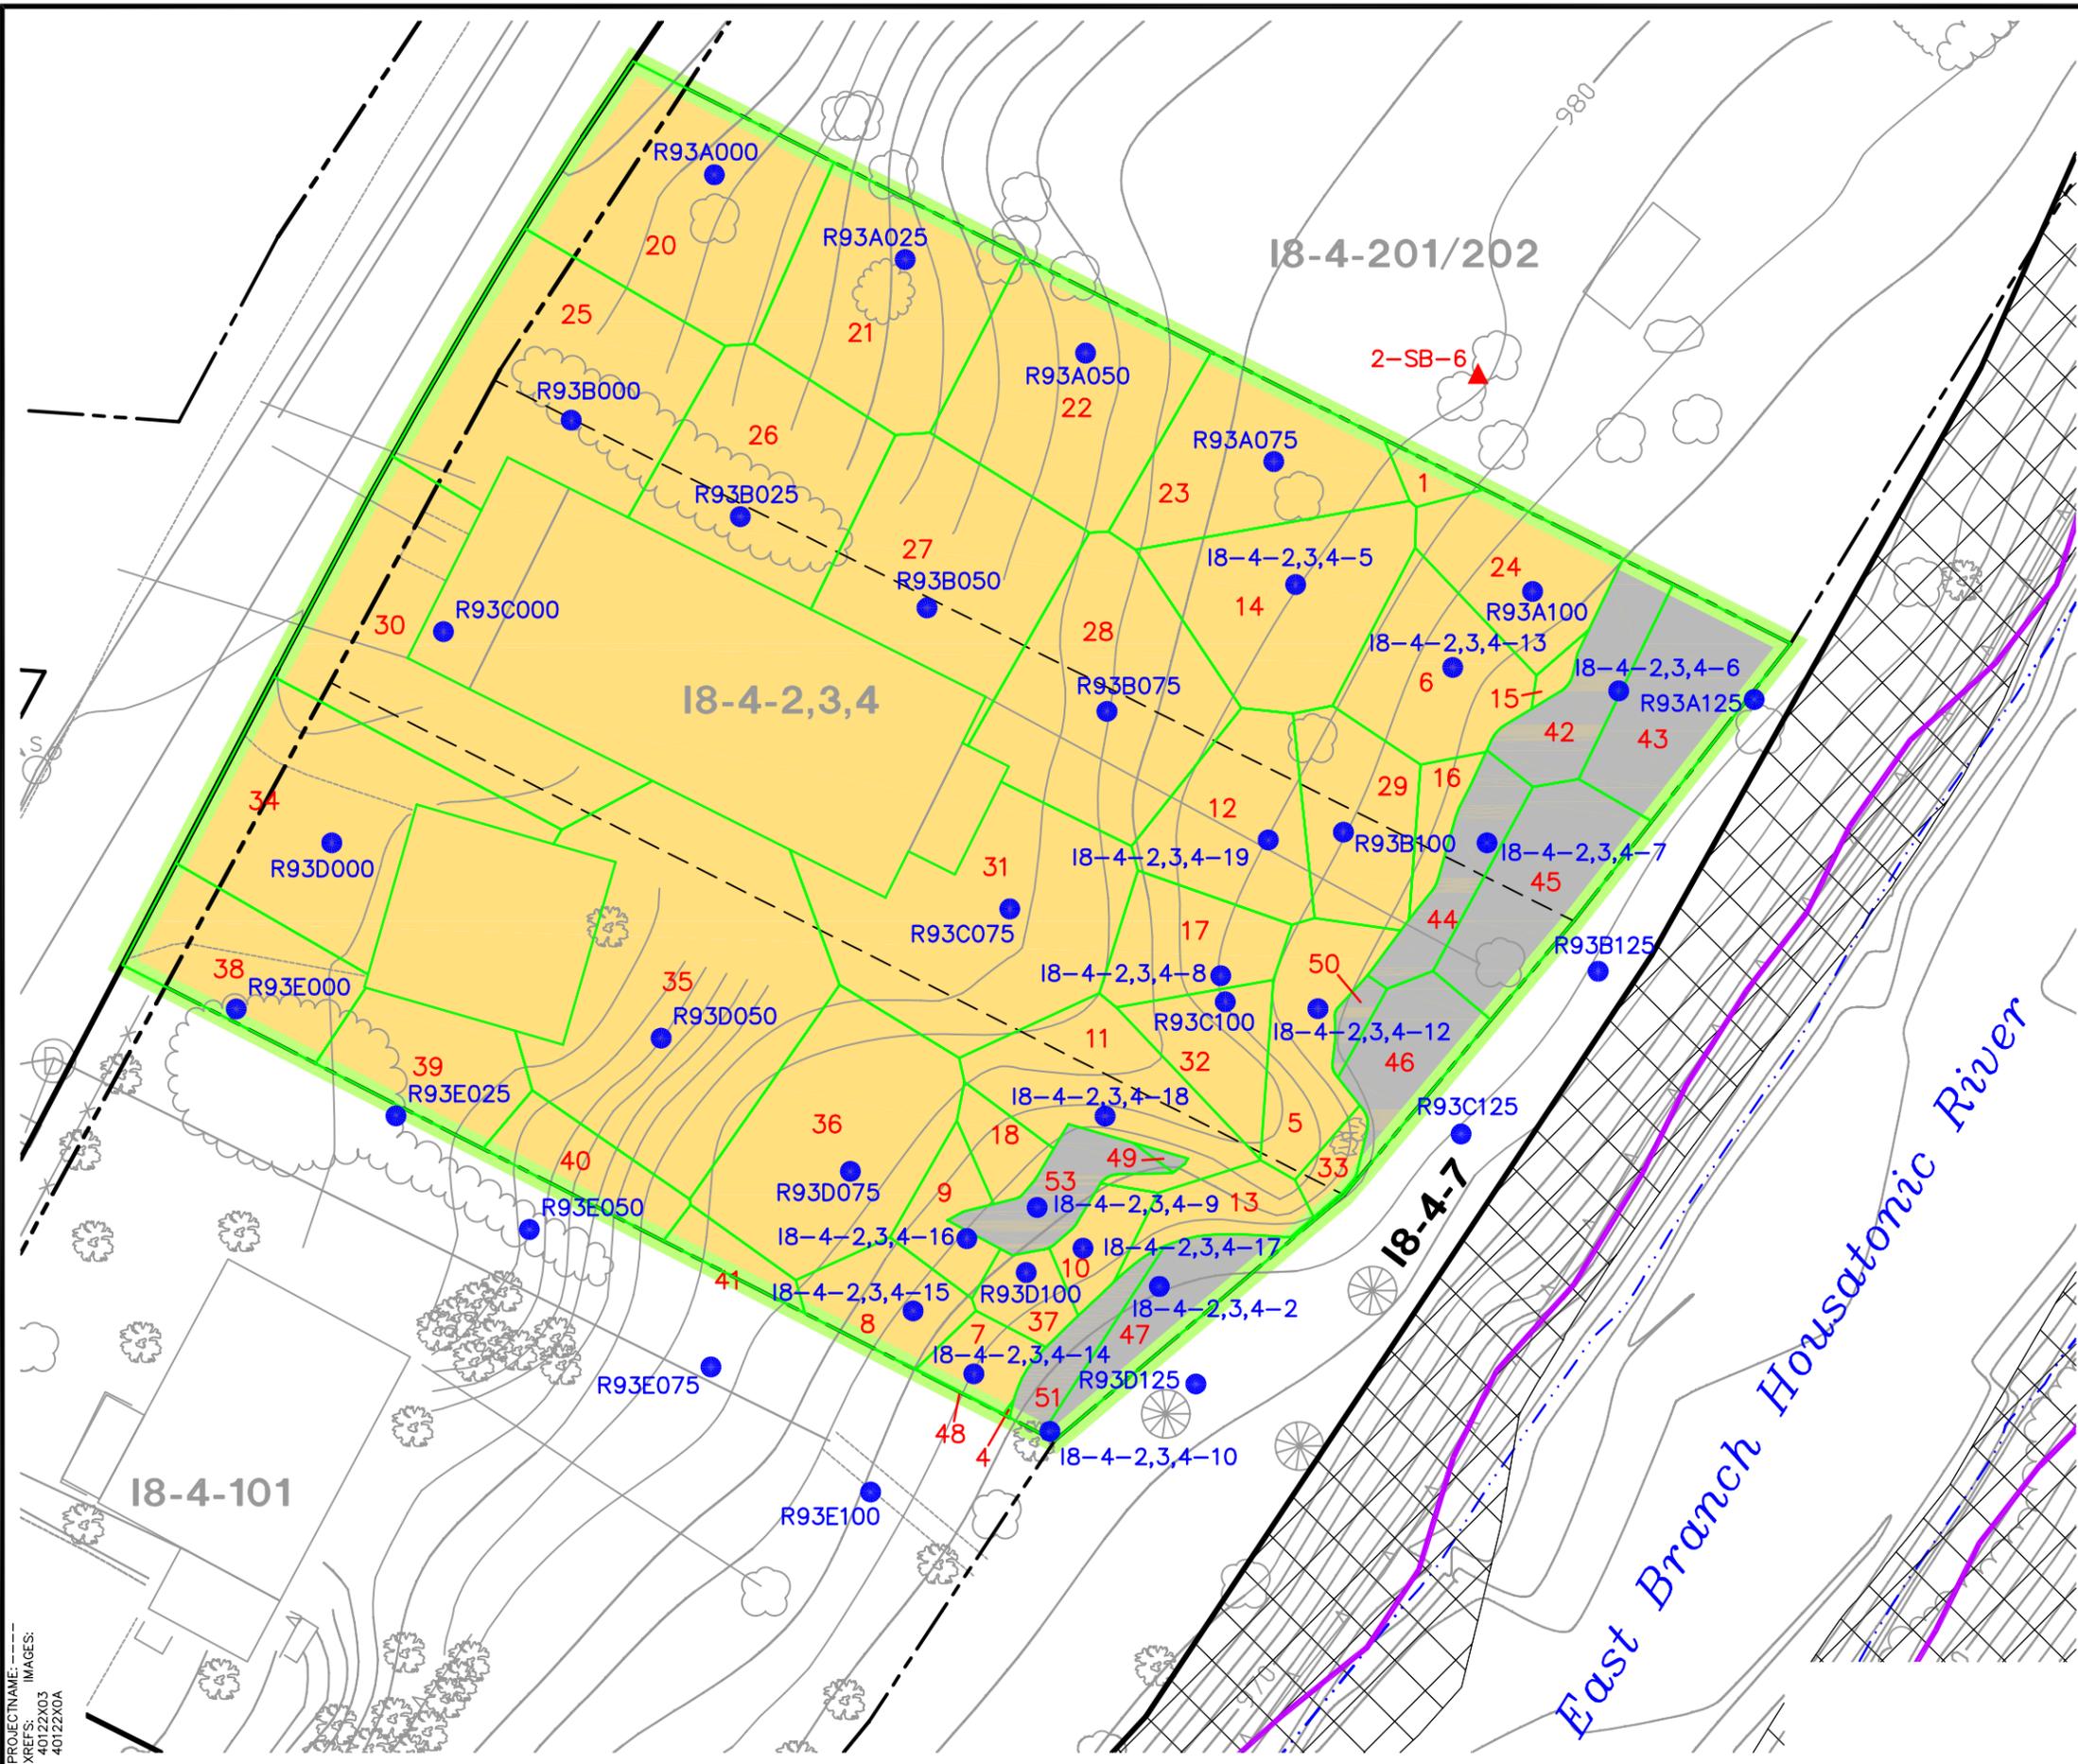


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-9 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SB-6 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 3 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURES 4, 5, AND 6 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-201/202, 18-4-101, AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-2, -3, -4  
 THEISSEN POLYGON MAP  
 1- TO 1.5-FOOT DEPTH INCREMENT**

FIGURE  
**A-11**


an ARCADIS company





SYR-85-NES KLS DMW LAYER: ON=\* OFF=\*REF, ICL River, ICL River\_STALBL, ITEXT 40scale, IWATER\_RIVER, \*SHD=PARCEL  
 G:\GE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122G18.DWG SAVER:12/12/2006 8:38 AM LAYOUT:5 PAGESETUP:----- PENTABLE:PLTFULLCTB PRINTED:12/12/2006 8:50 AM BY:DWODARCZYK

PROJECTNAME: IMAGES:  
 XREFS: 40122X03  
 40122X04

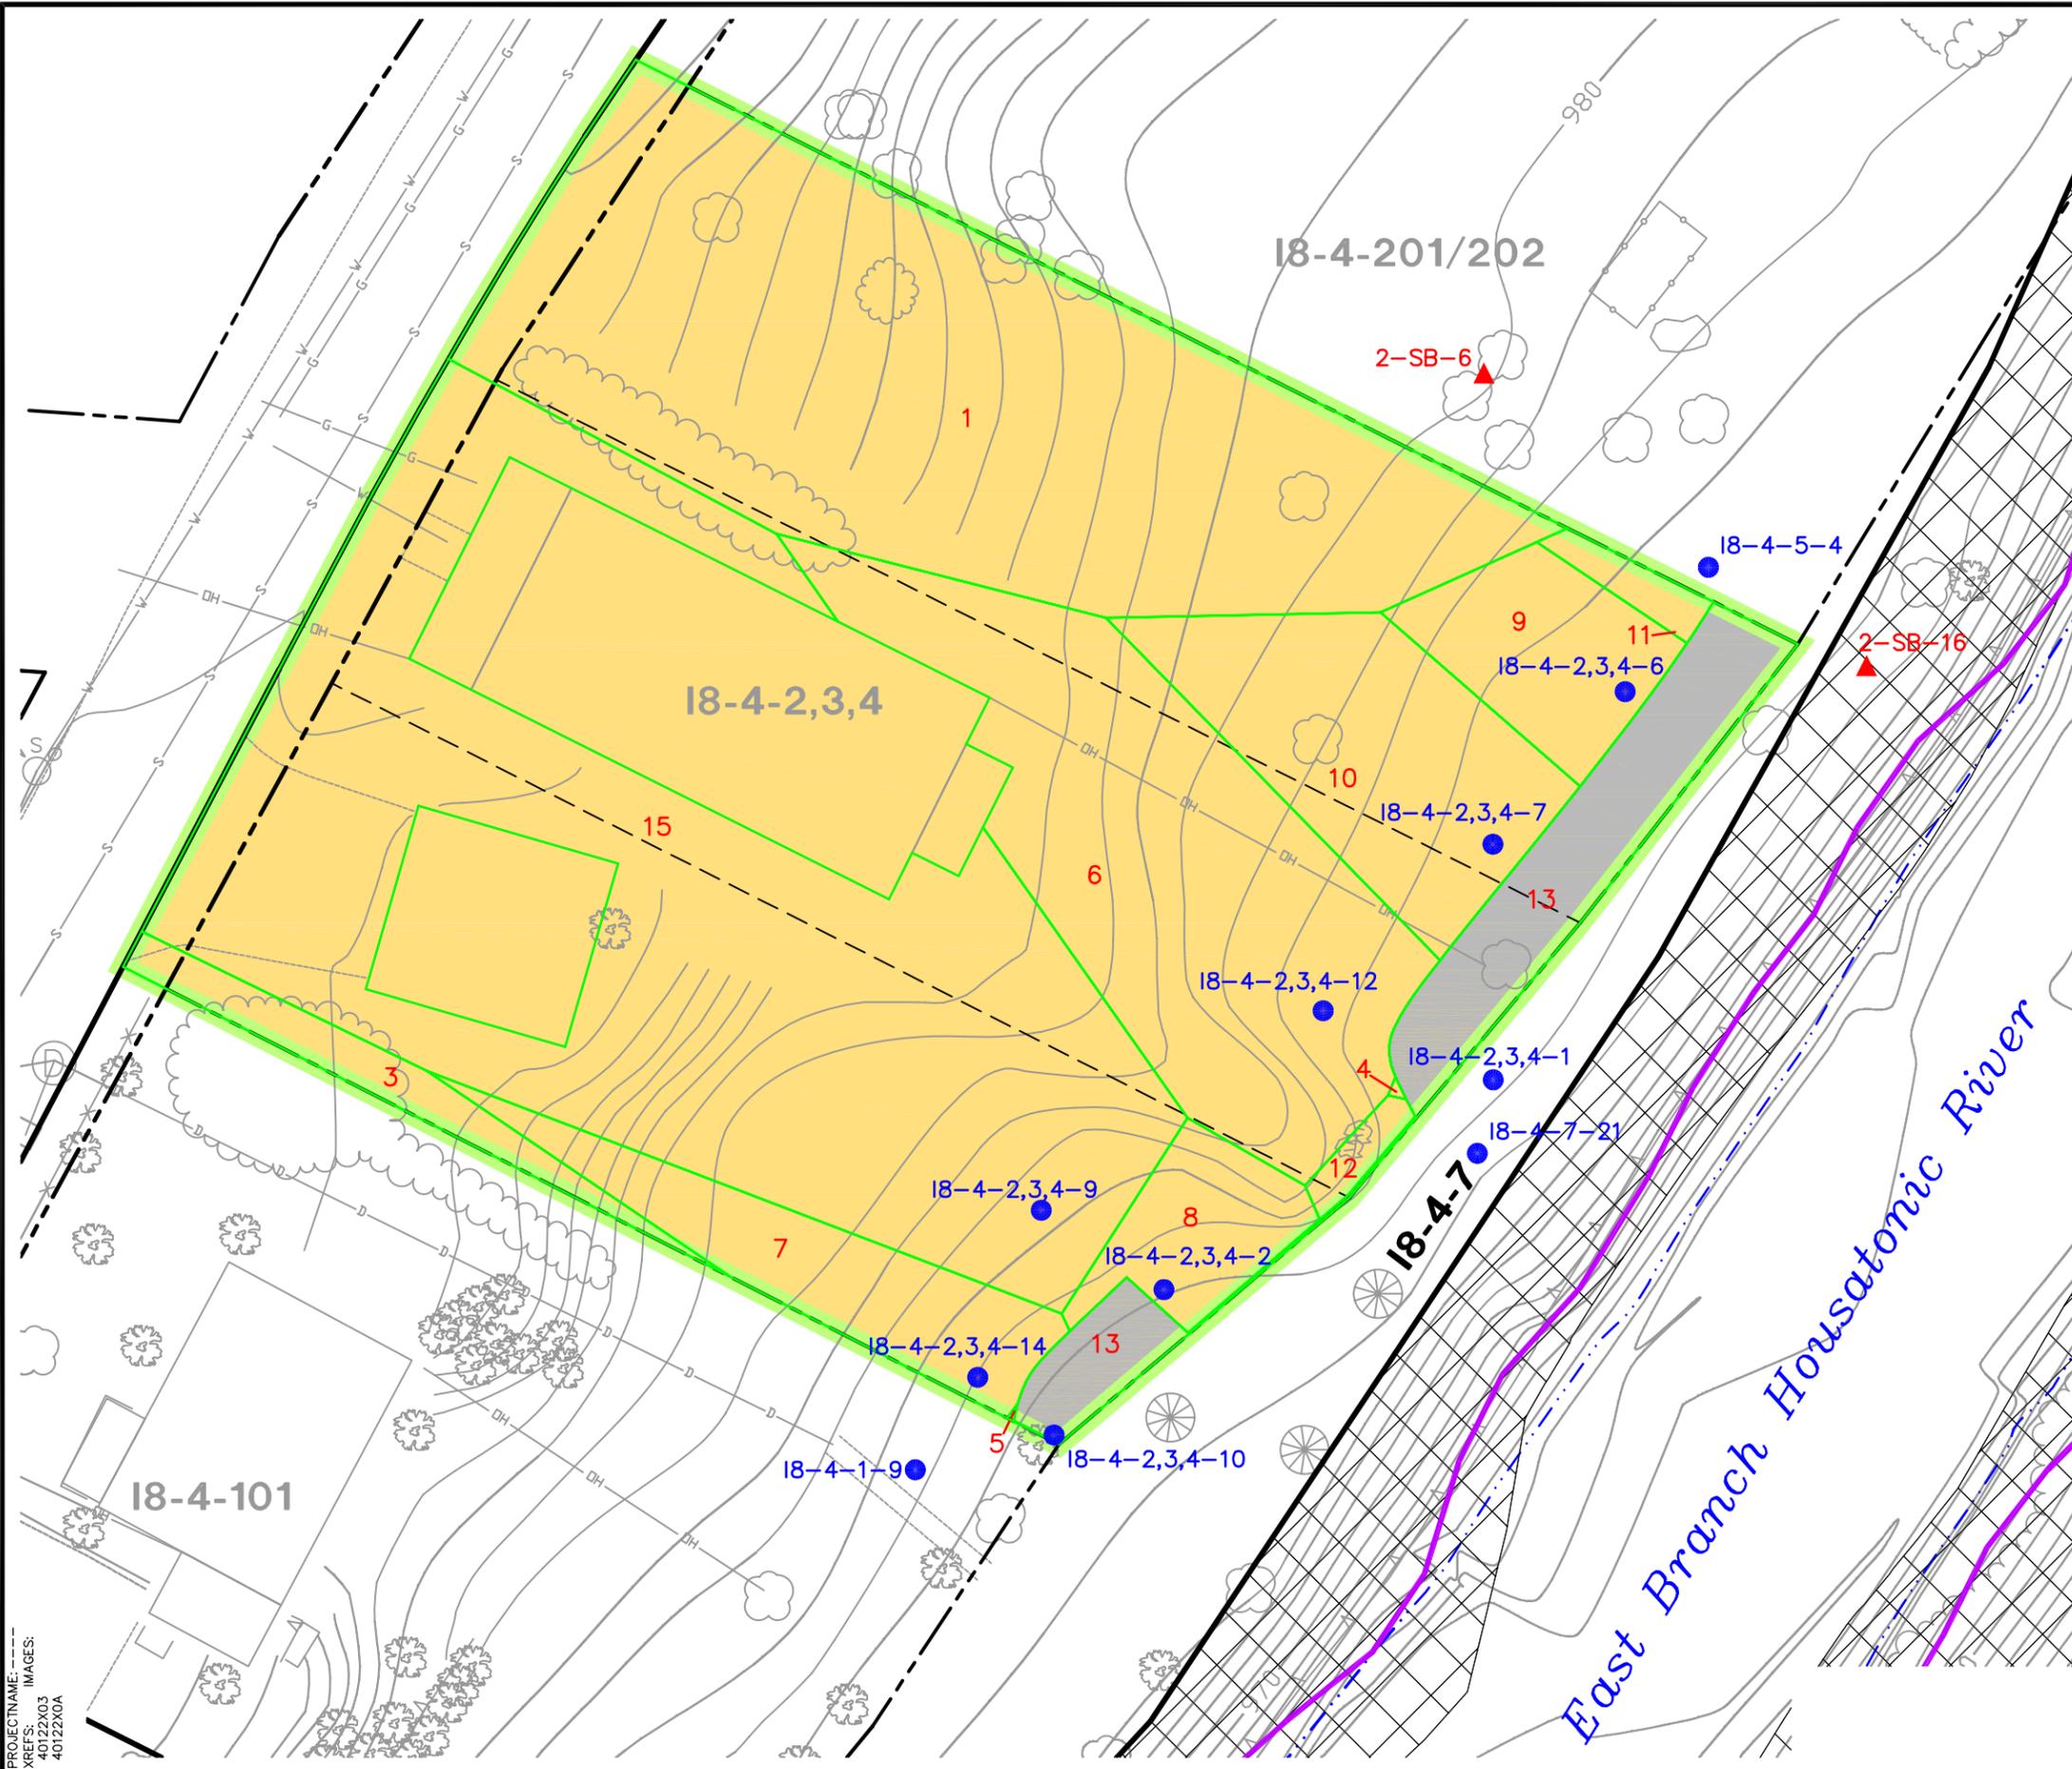


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-9 PRE-2000 SOIL BORING LOCATION
- 2-SB-6 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 3** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURES 4, 5, AND 6 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-201/202, 18-4-101, AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**PARCEL 18-4-2, -3, -4  
 THEISSEN POLYGON MAP  
 2.5- TO 3-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-14**

SYR-85-NES KLS DMW LAYER: ON=\* OFF=\*REF, ICL River, ICL River\_STALBL, ITEXT 40scale, IWATER\_RIVER, \*SHD=PARCEL  
 G:\GE\_ACTIVE\N\40122004\PHASE2\_ADDENDUM\40122G19.DWG SAVED:12/12/2006 8:39 AM LAYOUT:6 PAGESETUP:----- PENTABLE:PLTFULLCTB PRINTED:12/12/2006 8:49 AM BY:DWODARCZYK

PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

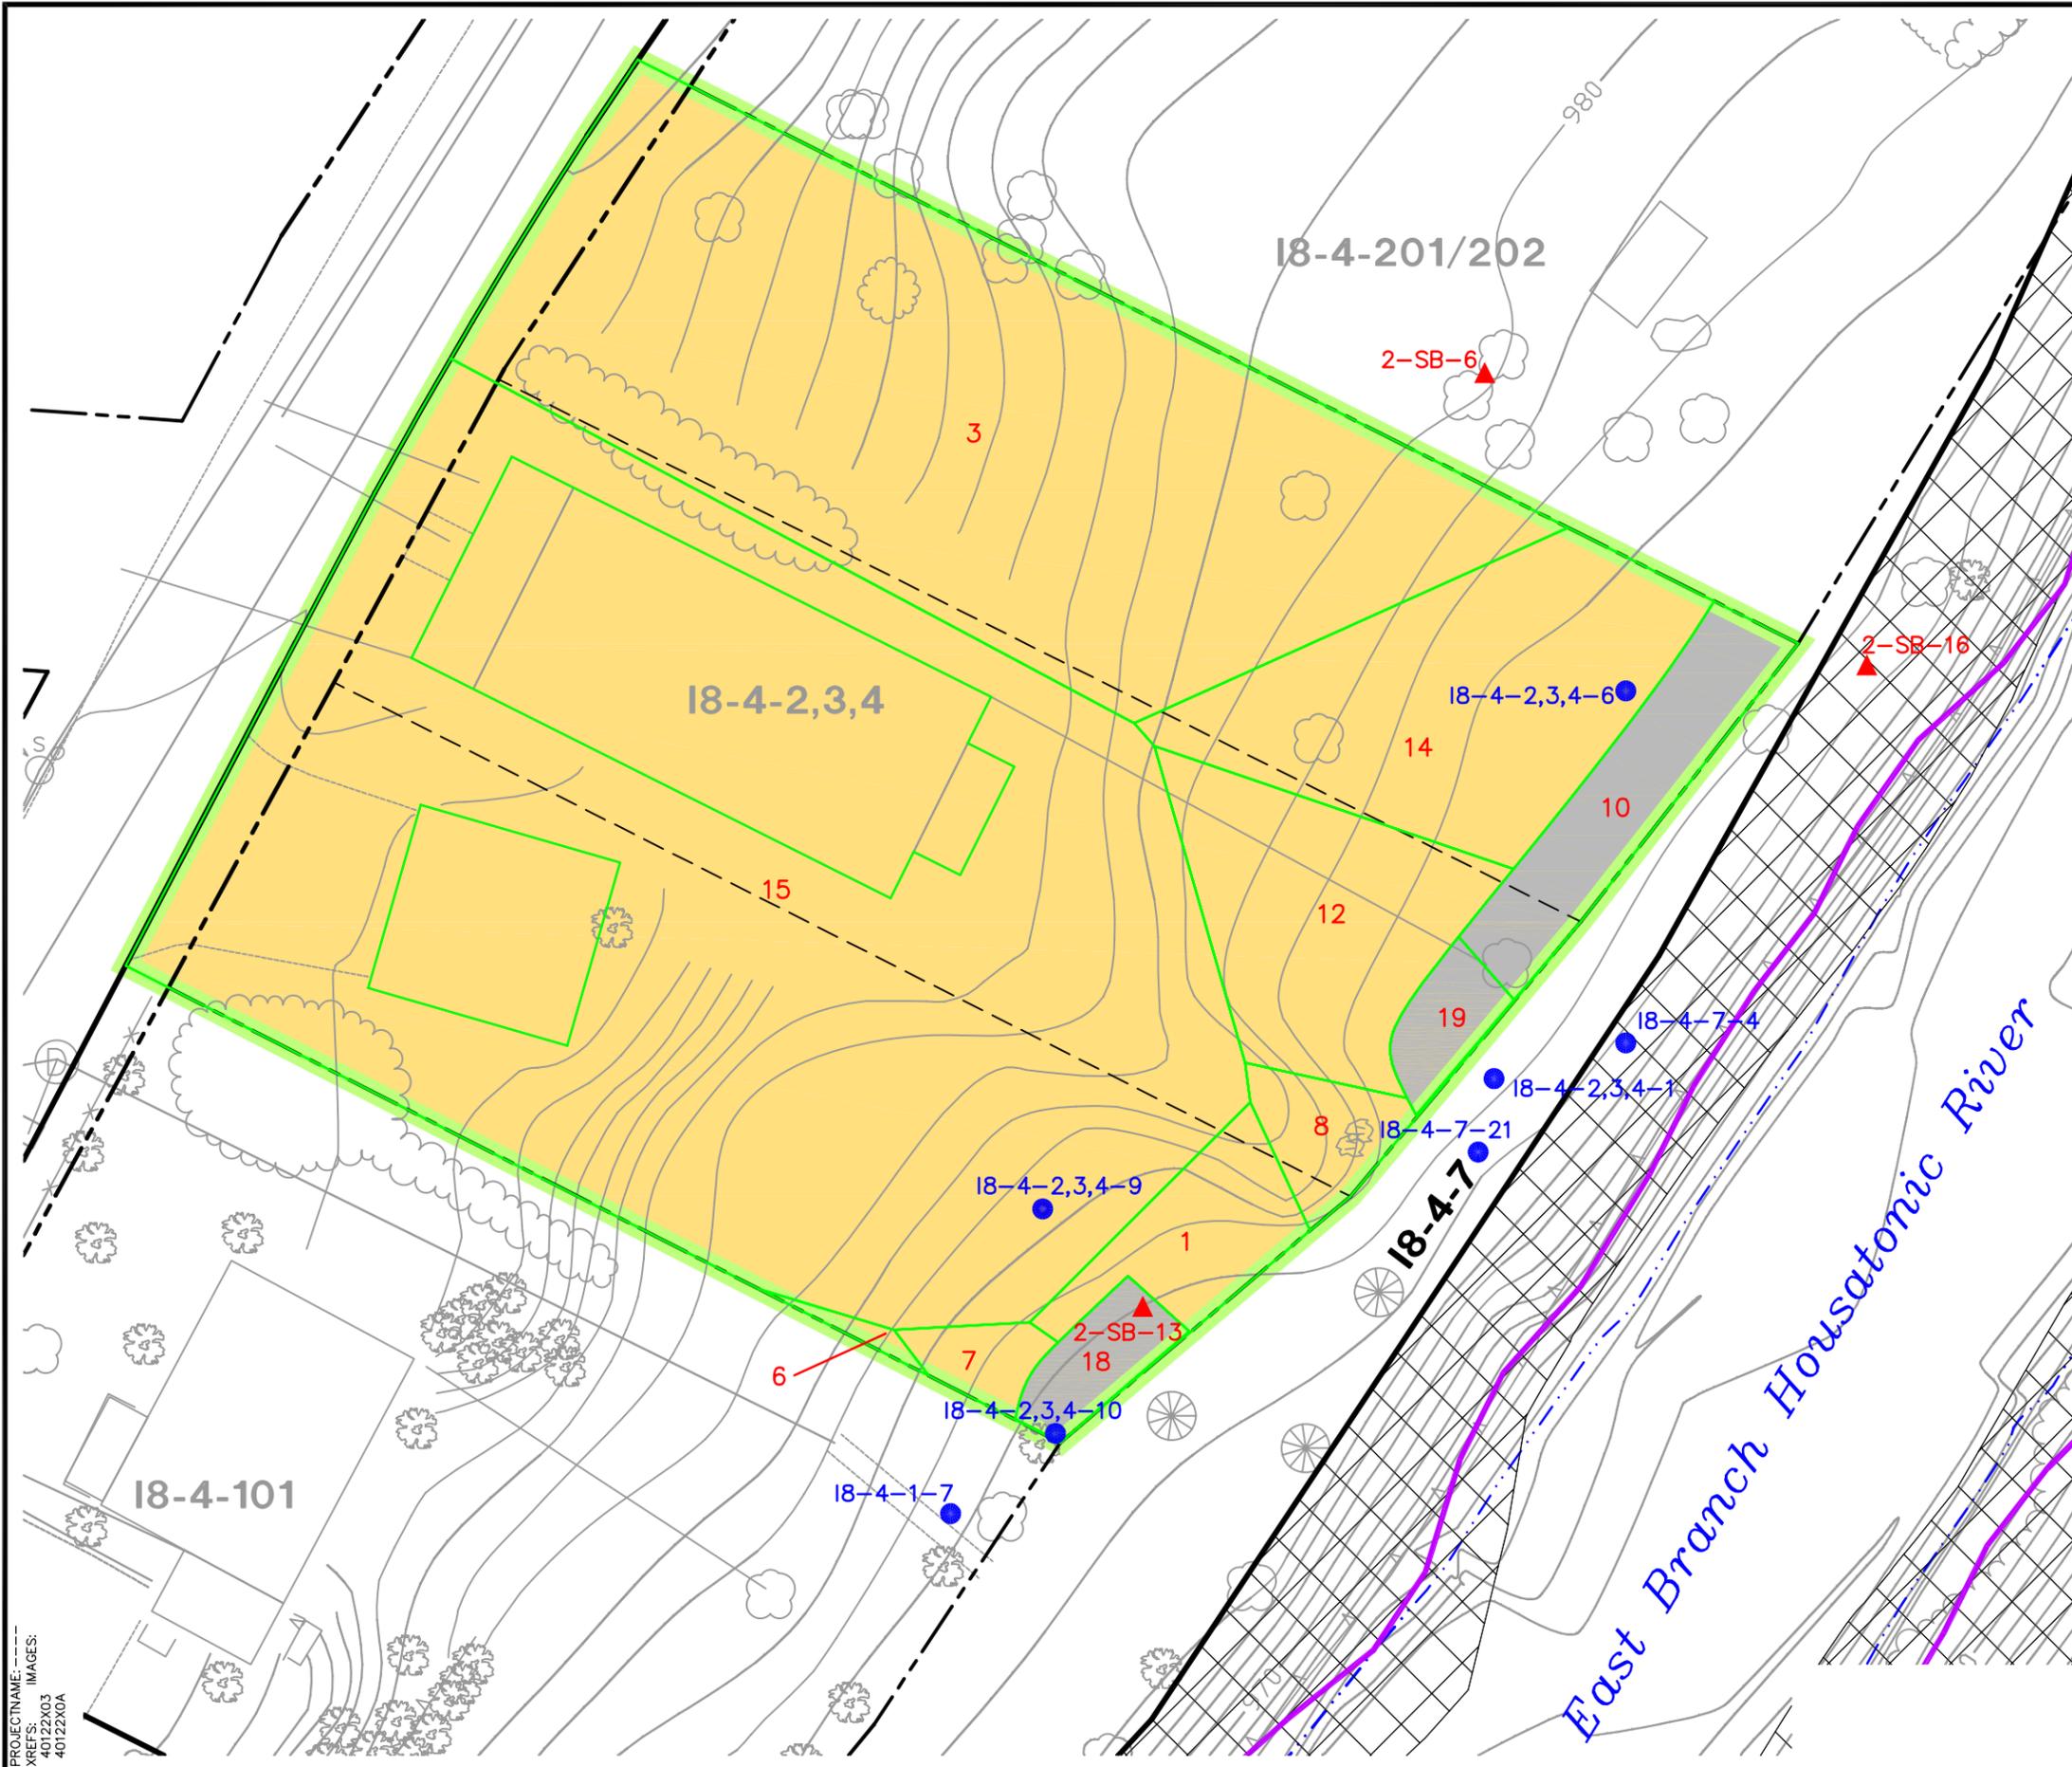


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- - - APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-9 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SB-6 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- × × WIRE FENCE
- ○ CHAIN LINK FENCE
- W WATER LINE
- G GAS LINE
- S SANITARY SEWER
- D DRAIN LINE
- OH OVERHEAD ELECTRIC
- ▲ ▲ RETAINING WALL
- 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- D DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 3 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURES 4, 5, AND 6 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-201/202, 18-4-101, AND 18-4-7, RESPECTIVELY.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-2, -3, -4  
 THEISSEN POLYGON MAP  
 3- TO 3.5-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-15**

SYR-85-NES KLS DMW LAYER: ON=\* OFF=\*REF, ICL River, ICL River, ICL River\_STALBL, ITEXT 40scale, IWater\_RIVER, \*SHD-PARCEL  
 G:\GE\_ACTIVE\N\40122004 PHASE2 ADDENDUM\40122004.DWG SAVER: 12/12/2006 8:39 AM LAYOUT: 7 PAGESETUP: ----- PENTABLE: PLTFULL.CTB PRINTED: 12/12/2006 8:48 AM BY: DWODARCZYK  
 PROJECTNAME: IMAGES:  
 XREFS: 40122X03  
 40122X04

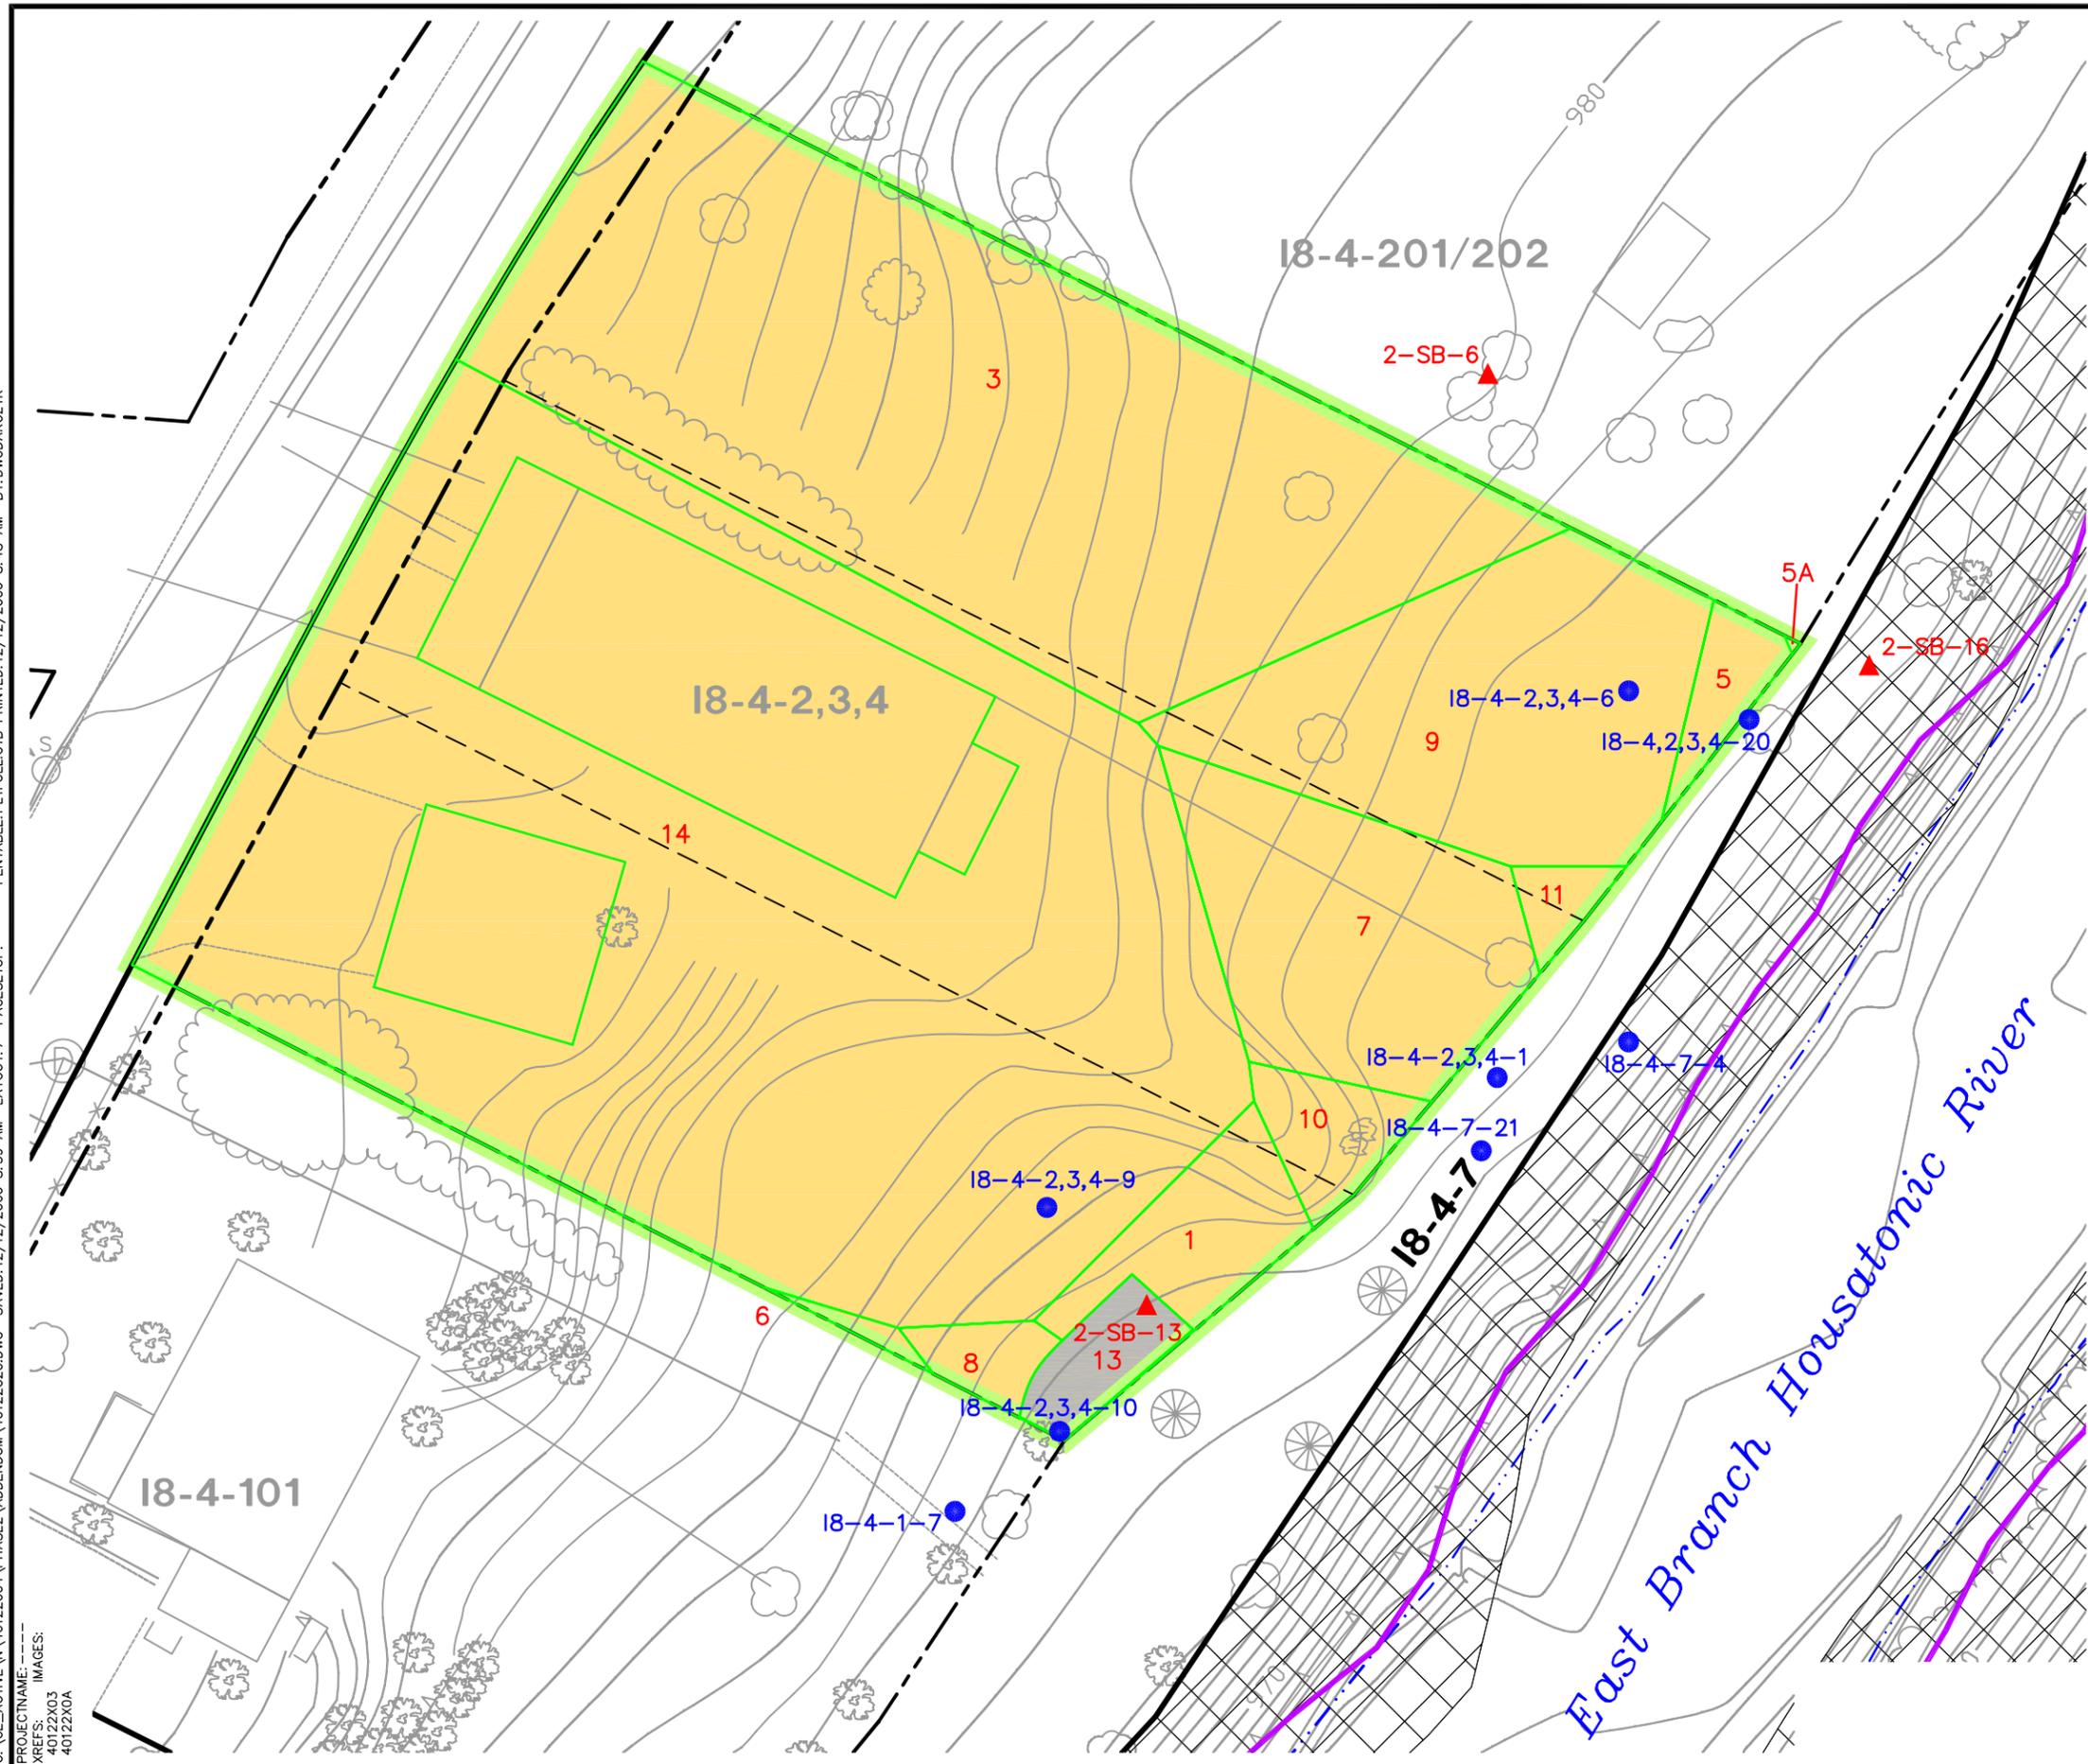


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- **18-4-2,3,4-9** PRE-2000 SOIL BORING LOCATION
- ▲ **2-SB-6** PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 4 FEET)
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURES 4, 5, AND 6 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-201/202, 18-4-101, AND 18-4-7, RESPECTIVELY.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**  
**PARCEL 18-4-2, -3, -4**  
**THEISSEN POLYGON MAP**  
**3.5- TO 4-FOOT DEPTH INCREMENT**

FIGURE  
A-16

an ARCADIS company

SYR-85-NES KLS DMW L: ON= OFF=REF\* G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122621.DWG SAVED: 12/12/2006 8:40 AM LAYOUT: 8 PAGESETUP: PENTABLE: PLTFULLCTB PRINTED: 12/12/2006 8:47 AM BY: DWODARCZYK

PROJECTNAME: XREFS: IMAGES: 40122X03 40122X0A

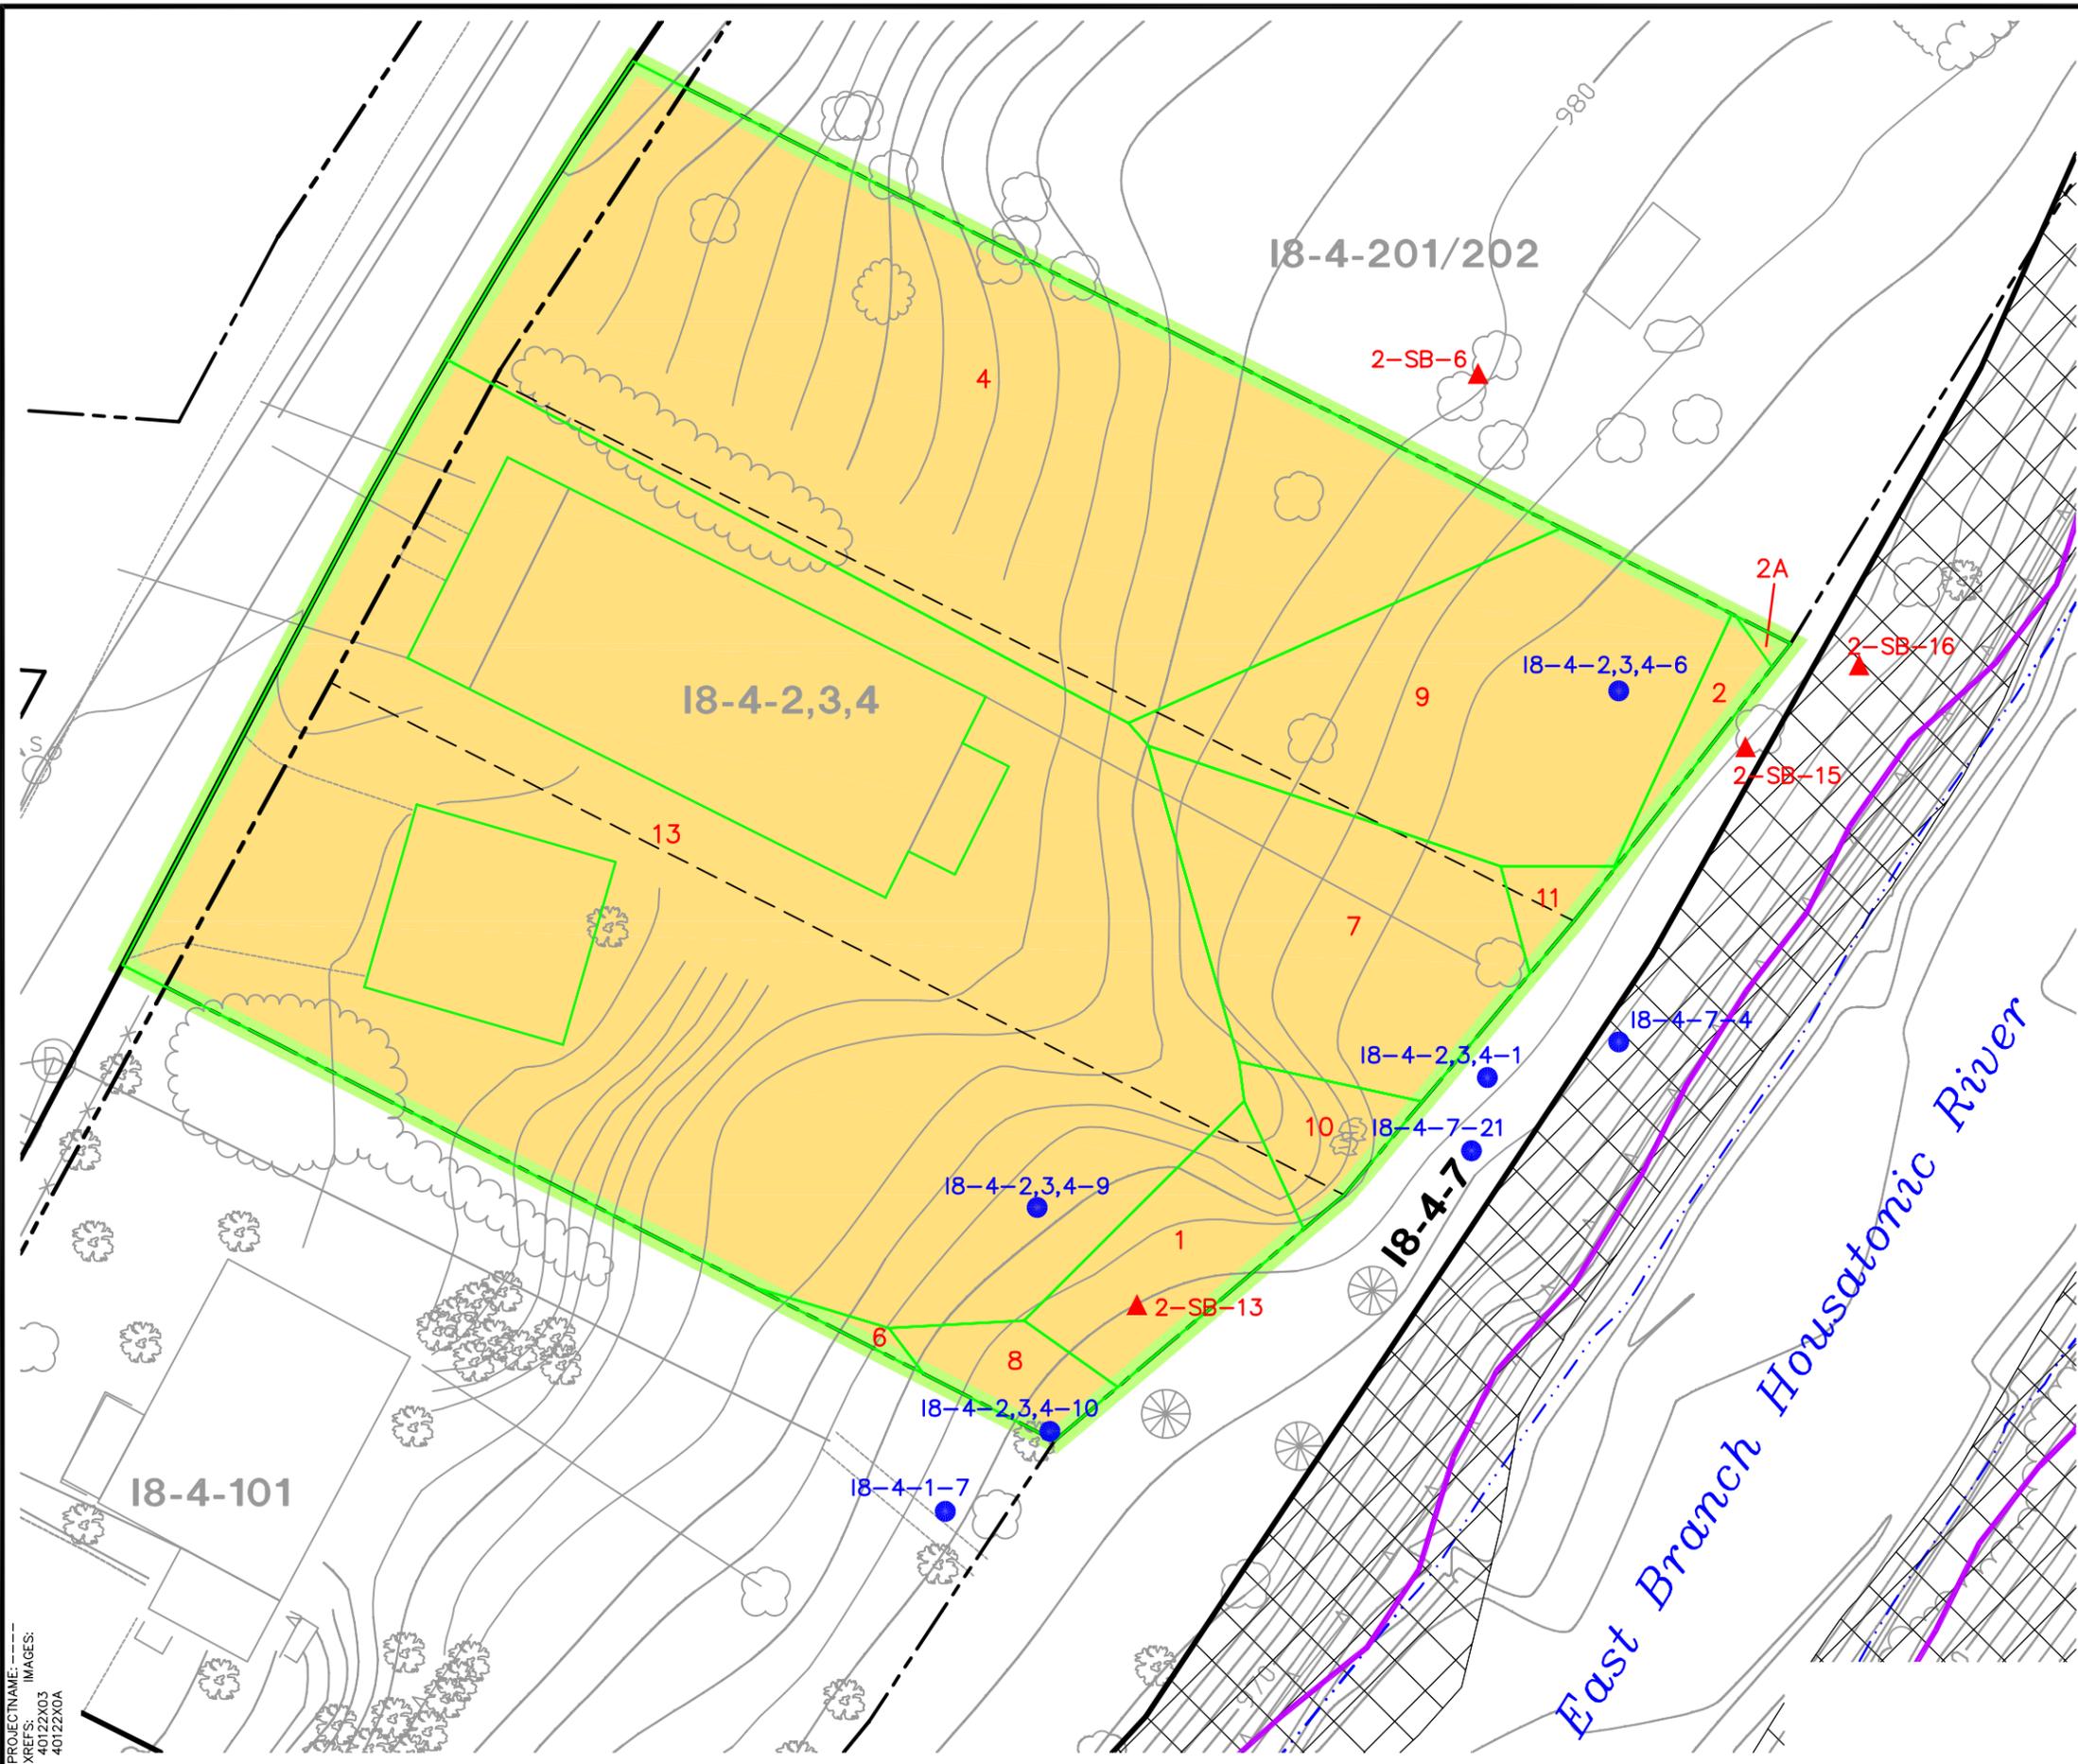


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- - - APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4 RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-2,3,4-9 PRE-2000 SOIL BORING LOCATION
- ▲ 2-SB-6 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- × × WIRE FENCE
- ○ CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- ▲ ▲ RETAINING WALL
- 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 3 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURES 4, 5, AND 6 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-201/202, 18-4-101, AND 18-4-7, RESPECTIVELY.



GENERAL ELECTRIC COMPANY  
PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-2, -3, -4  
THEISSEN POLYGON MAP  
4- TO 5-FOOT DEPTH INCREMENT**

**BBL**  
an ARCADIS company

FIGURE  
**A-17**

---

**Parcels 18-4-7**

**TABLE A-7  
EXISTING CONDITIONS  
PARCEL I8-4-7: 0- TO 1-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**0- TO 1-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-5	31	26	0 - 1	2.33	0.96	2.33	2.23
2-SB-16	30	86	0 - 1	2	3.19	2.00	6.37
2-SS-12	32	22	0 - 1	50	0.81	50.00	40.26
I7-21-8-13	13	29	0 - 0.5	4.29	1.09	9.30	10.12
			0.5 - 1	14.3			
I8-4-7-23	11	1	0 - 0.5	9.07	0.04	16.73	0.60
			0.5 - 1	24.4			
I8-4-7-25	10	177	0 - 0.5	1.88	6.57	2.73	17.92
			0.5 - 1	3.58			
R54A100	27	746	0 - 0.5	<b>0.25</b>	27.63	0.25	6.91
			0.5 - 1	<b>0.25</b>			
R54B100	28	328	0 - 0.5	<b>0.25</b>	12.15	0.25	3.04
			0.5 - 1	<b>0.25</b>			
R54C100	29	373	0 - 0.5	<b>0.25</b>	13.82	0.25	3.45
			0.5 - 1	<b>0.25</b>			
R54D100	22	1,739	0 - 0.5	<b>0.25</b>	64.40	0.25	16.10
			0.5 - 1	<b>0.25</b>			
R93A125	23	140	0 - 0.5	0.1485	5.20	0.20	1.04
			0.5 - 1	<b>0.25</b>			
R93B125	24	293	0 - 0.5	27	10.85	51.50	558.64
			0.5 - 1	76			
R93C125	25	455	0 - 0.5	<b>0.3</b>	16.84	0.28	4.63
			0.5 - 1	<b>0.25</b>			
R93D125	26	1,106	0 - 0.5	<b>0.25</b>	40.96	0.25	10.24
			0.5 - 1	<b>0.25</b>			
<b>Totals:</b>	--	5,521	--	--	204.49	--	681.54
					<b>Volume Weighted Average:</b>		<b>3.33</b>

**Notes:**

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.

**TABLE A-8  
EXISTING CONDITIONS  
PARCEL I8-4-7: 1- TO 3-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**1- TO 2-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-16	30	73	1 - 2	0.219	2.71	0.22	0.59
I8-4-5-7	33	16	1 - 1.5	6.26	0.61	3.52	2.14
			1.5 - 2	0.787			
I8-4-5-8	31	32	1 - 1.5	0.148	1.20	0.20	0.24
			1.5 - 2	0.258			
I8-4-7-6	11	1	1 - 1.5	109	0.03	117.50	3.28
			1.5 - 2	126			
I8-4-7-15	32	12	1 - 1.5	11.4	0.44	7.66	3.36
			1.5 - 2	3.92			
I8-4-7-17	10	24	1 - 1.5	30.8	0.90	49.90	44.96
			1.5 - 2	69			
I8-4-7-23	9	1	1 - 1.5	204	0.04	279.00	10.01
			1.5 - 2	354			
I8-4-7-25	8	182	1 - 1.5	1.2	6.73	1.08	7.27
			1.5 - 2	0.961			
R54A100	27	746	1 - 1.5	0.25	27.63	12.95	357.76
			1.5 - 2	25.65			
R54B100	28	328	1 - 1.5	0.25	12.15	0.25	3.04
			1.5 - 2	0.25			
R54C100	29	373	1 - 1.5	0.25	13.82	0.25	3.45
			1.5 - 2	0.25			
R54D100	22	1,739	1 - 1.5	0.25	64.40	0.25	16.10
			1.5 - 2	0.25			
R93A125	23	140	1 - 1.5	0.25	5.20	0.25	1.30
			1.5 - 2	0.25			
R93B125	24	293	1 - 1.5	53	10.85	30.60	331.93
			1.5 - 2	8.2			
R93C125	25	455	1 - 1.5	0.25	16.84	0.25	4.21
			1.5 - 2	0.25			
R93D125	26	1,106	1 - 1.5	0.3	40.96	0.45	18.43
			1.5 - 2	0.6			
<b>Totals:</b>	--	5,521	--	--	204.48	--	808.07
<b>Volume Weighted Average:</b>							<b>3.95</b>

**2- TO 3-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
I8-4-5-7	8	16	2 - 2.5	5.04	0.61	2.55	1.54
			2.5 - 3	0.05			
I8-4-7-6	21	1	2 - 2.5	81.2	0.03	53.75	1.50
			2.5 - 3	26.3			
I8-4-7-15	6	35	2 - 2.5	7.69	1.30	6.97	9.08
			2.5 - 3	6.24			
I8-4-7-17	20	24	2 - 2.5	29	0.90	47.20	42.52
			2.5 - 3	65.4			
I8-4-7-21	15	8	2 - 2.5	8.17	0.29	6.76	1.97
			2.5 - 3	5.34			
I8-4-7-22	7	9	2 - 2.5	700	0.33	353.40	115.52
			2.5 - 3	6.8			
I8-4-7-23	29	1	2 - 2.5	263	0.04	271.50	9.74
			2.5 - 3	280			
I8-4-7-25	28	182	2 - 2.5	1.15	6.73	8.13	54.64
			2.5 - 3	15.1			
2-SB-16	4	5,245	2 - 3	0.219	194.26	0.22	42.54
<b>Totals:</b>	--	5,521	--	--	204.48	--	279.06
<b>Volume Weighted Average:</b>							<b>1.36</b>

**TABLE A-8  
EXISTING CONDITIONS  
PARCEL I8-4-7: 1- TO 3-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

SUMMARY - 1- TO 3-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	5,521	--	--	408.96	--	1,087.13
					<b>Volume Weighted Average:</b>		<b>2.66</b>

Notes:

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.

**TABLE A-9  
EXISTING CONDITIONS  
PARCEL I8-4-7: 0- TO 15-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

SUMMARY - 0- TO 1-FOOT DEPTH INCREMENT (TABLE A-7)

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	5,521	--	--	204.49	--	681.54
<b>Volume Weighted Average:</b>						--	3.33

SUMMARY - 1- TO 3-FOOT DEPTH INCREMENT (TABLE A-8)

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	5,521	--	--	408.96	--	1,087.13
<b>Volume Weighted Average:</b>						--	2.66

3- TO 4-FOOT DEPTH INCREMENT

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-5	65	47	3 - 4	0.023	1.76	0.02	0.04
2-SB-7	51	334	3 - 4	3.7	12.39	3.70	45.83
2-SB-8	49	625	3 - 4	0.063	23.16	0.06	1.46
2-SB-9	47	414	3 - 4	0.074	15.34	0.07	1.14
2-SB-10	45	400	3 - 4	4.4	14.83	4.40	65.25
2-SB-11	44	417	3 - 4	0.078	15.43	0.08	1.20
2-SB-13	62	153	3 - 4	0.097	5.65	0.10	0.55
2-SB-16	64	93	3 - 4	0.027	3.46	0.03	0.09
I8-4-1-2	59	215	3 - 3.5 3.5 - 4	1.79 1.1	7.98	1.45	11.53
I8-4-1-7	60	189	3 - 3.5 3.5 - 4	15.8 11.6	6.98	13.70	95.69
I8-4-2,3,4-1	52	144	3 - 3.5 3.5 - 4	12.4 1.84	5.33	7.12	37.95
I8-4-2,3,4-10	61	136	3 - 3.5 3.5 - 4	14.605 28.5	5.03	21.55	108.43
I8-4-2,3,4-20	54	171	3 - 3.5 3.5 - 4	20.9 4.87	6.35	12.89	81.78
I8-4-7-1	58	198	3 - 3.5 3.5 - 4	32.3 114	7.32	73.15	535.11
I8-4-7-2	46	397	3 - 3.5 3.5 - 4	12.8 71.5	14.70	42.15	619.70
I8-4-7-3	48	333	3 - 3.5 3.5 - 4	117 41	12.34	78.80	972.57
I8-4-7-4	63	220	3 - 3.5 3.5 - 4	16.5 83.2	8.13	49.85	405.41
I8-4-7-5	50	274	3 - 3.5 3.5 - 4	4.5 42.5	10.13	23.50	238.14
I8-4-7-6	22	12	3 - 3.5 3.5 - 4	27.3 14.7	0.45	21.00	9.46
I8-4-7-18	57	80	3 - 3.5 3.5 - 4	38.9 11.8	2.97	25.35	75.19
I8-4-7-19	56	111	3 - 3.5 3.5 - 4	13.2 1.32	4.12	7.26	29.90
I8-4-7-20	55	192	3 - 3.5 3.5 - 4	108 57.4	7.11	82.70	588.16
I8-4-7-21	53	365	3 - 3.5 3.5 - 4	1.99 6.58	13.53	4.29	57.96
<b>Totals:</b>	--	5,521	--	--	204.48	--	3,982.52
<b>Volume Weighted Average:</b>						--	19.48

**TABLE A-9  
EXISTING CONDITIONS  
PARCEL I8-4-7: 0- TO 15-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**4- TO 5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-5	65	47	4 - 5	0.023	1.76	0.02	0.04
2-SB-7	52	334	4 - 5	3.7	12.39	3.70	45.83
2-SB-8	51	625	4 - 5	0.063	23.16	0.06	1.46
2-SB-9	50	414	4 - 5	0.074	15.34	0.07	1.14
2-SB-10	49	400	4 - 5	4.4	14.83	4.40	65.25
2-SB-11	54	417	4 - 5	0.078	15.43	0.08	1.20
2-SB-13	62	153	4 - 5	0.097	5.65	0.10	0.55
2-SB-15	53	177	4 - 5	0.032	6.56	0.03	0.21
2-SB-16	64	99	4 - 5	0.027	3.68	0.03	0.10
I8-4-1-2	60	215	4 - 4.5	3.75	7.98	2.23	17.78
			4.5 - 5	0.708			
I8-4-1-7	58A	189	4 - 4.5	2.4	6.98	5.08	35.45
			4.5 - 5	7.75			
I8-4-2,3,4-1	44	144	4 - 4.5	3.12	5.33	1.97	10.52
			4.5 - 5	0.829			
I8-4-2,3,4-10	61	136	4 - 4.5	1.19	5.03	3.05	15.34
			4.5 - 5	4.91			
I8-4-7-1	58	198	4 - 4.5	19.1	7.32	12.70	92.90
			4.5 - 5	6.3			
I8-4-7-2	45	397	4 - 4.5	12.2	14.70	6.73	98.95
			4.5 - 5	1.26			
I8-4-7-3	47	333	4 - 4.5	43.1	12.34	49.60	612.18
			4.5 - 5	56			
I8-4-7-4	63	208	4 - 4.5	11.5	7.71	6.99	53.83
			4.5 - 5	2.47			
I8-4-7-5	48	274	4 - 4.5	19.2	10.13	22.50	228.01
			4.5 - 5	25.8			
I8-4-7-6	59	12	4 - 4.5	1.96	0.45	2.08	0.93
			4.5 - 5	2.19			
I8-4-7-18	57	80	4 - 4.5	0.431	2.97	0.55	1.63
			4.5 - 5	0.67			
I8-4-7-19	56	111	4 - 4.5	0.207	4.12	0.28	1.16
			4.5 - 5	0.354			
I8-4-7-20	55	192	4 - 4.5	0.392	7.12	0.50	3.57
			4.5 - 5	0.611			
I8-4-7-21	46	365	4 - 4.5	1.3	13.53	53.15	718.92
			4.5 - 5	105			
<b>Totals:</b>	--	5,521	--	--	204.49	--	2,006.94
<b>Volume Weighted Average:</b>							<b>9.81</b>

**5- TO 6-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-7	43	334	5 - 6	3.7	12.39	3.70	45.83
2-SB-8	42	674	5 - 6	0.063	24.96	0.06	1.57
2-SB-9	41	489	5 - 6	0.074	18.11	0.07	1.34
2-SB-10	40	400	5 - 6	4.4	14.83	4.40	65.25
2-SB-11	45	417	5 - 6	0.078	15.43	0.08	1.20
2-SB-13	52	155	5 - 6	0.0275	5.73	0.03	0.16
2-SB-14	51	270	5 - 6	0.027	9.99	0.03	0.27
2-SB-15	44	324	5 - 6	0.032	11.99	0.03	0.38
I8-4-7-1	49	198	5 - 5.5	23.7	7.32	16.50	120.70
			5.5 - 6	9.3			
I8-4-7-2	36	397	5 - 5.5	165	14.70	122.60	1,802.50
			5.5 - 6	80.2			
I8-4-7-3	38	468	5 - 5.5	6.79	17.33	33.40	578.85
			5.5 - 6	60			

**TABLE A-9  
EXISTING CONDITIONS  
PARCEL 18-4-7: 0- TO 15-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**5- TO 6-FOOT DEPTH INCREMENT CONTINUED**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
18-4-7-4	53	261	5 - 5.5	13.5	9.68	8.36	80.89
			5.5 - 6	3.22			
18-4-7-5	39	278	5 - 5.5	60.8	10.30	36.35	374.45
			5.5 - 6	11.9			
18-4-7-6	50	12	5 - 5.5	1.06	0.45	0.62	0.28
			5.5 - 6	0.182			
18-4-7-18	48	80	5 - 5.5	0.67	2.97	0.64	1.90
			5.5 - 6	0.6095			
18-4-7-19	47	116	5 - 5.5	0.354	4.31	0.20	0.87
			5.5 - 6	0.05			
18-4-7-20	46	192	5 - 5.5	0.611	7.12	0.33	2.35
			5.5 - 6	0.05			
18-4-7-21	37	456	5 - 5.5	105	16.89	65.00	1,097.91
			5.5 - 6	25			
<b>Totals:</b>	--	5,521	--	--	204.49	--	4,176.70
<b>Volume Weighted Average:</b>							<b>20.42</b>

**6- TO 6.5-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-7	24	672	6 - 6.5	0.0195	12.45	0.02	0.24
2-SB-8	23	1,063	6 - 6.5	0.02	19.69	0.02	0.39
2-SB-9	22	981	6 - 6.5	0.01975	18.17	0.02	0.36
2-SB-10	21	718	6 - 6.5	0.0195	13.29	0.02	0.26
2-SB-11	26	488	6 - 6.5	0.0185	9.03	0.02	0.17
2-SB-13	29	173	6 - 6.5	0.0275	3.20	0.03	0.09
2-SB-14	28	355	6 - 6.5	0.027	6.57	0.03	0.18
2-SB-15	25	409	6 - 6.5	0.053	7.57	0.05	0.40
18-4-7-17	27	31	6 - 6.5	0.164	0.57	0.16	0.09
18-4-7-21	20	632	6 - 6.5	61.1	11.71	61.10	715.26
<b>Totals:</b>	--	5,521	--	--	102.24	--	717.44
<b>Volume Weighted Average:</b>							<b>7.02</b>

**6.5- TO 7-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-7	22	672	6.5 - 7	0.0195	12.45	0.02	0.24
2-SB-8	21	1,063	6.5 - 7	0.02	19.69	0.02	0.39
2-SB-9	20	981	6.5 - 7	0.01975	18.17	0.02	0.36
2-SB-10	19	722	6.5 - 7	0.0195	13.37	0.02	0.26
2-SB-11	24	514	6.5 - 7	0.0185	9.52	0.02	0.18
2-SB-13	26	173	6.5 - 7	0.0275	3.20	0.03	0.09
2-SB-14	25	355	6.5 - 7	0.027	6.57	0.03	0.18
2-SB-15	23	409	6.5 - 7	0.053	7.57	0.05	0.40
18-4-7-21	18	632	6.5 - 7	22.9	11.71	22.90	268.08
<b>Totals:</b>	--	5,521	--	--	102.24	--	270.18
<b>Volume Weighted Average:</b>							<b>2.64</b>

**TABLE A-9  
EXISTING CONDITIONS  
PARCEL I8-4-7: 0- TO 15-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**7- TO 8-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-7	20	820	7 - 8	0.0195	30.36	0.02	0.59
2-SB-8	19	1,063	7 - 8	0.02	39.37	0.02	0.79
2-SB-9	18	981	7 - 8	0.01975	36.34	0.02	0.72
2-SB-10	17	722	7 - 8	0.0195	26.74	0.02	0.52
2-SB-11	22	514	7 - 8	0.0185	19.05	0.02	0.35
2-SB-14	23	365	7 - 8	0.039	13.51	0.04	0.53
2-SB-15	21	409	7 - 8	0.053	15.14	0.05	0.80
I8-4-7-21	16	647	7 - 7.5	7.64	23.97	3.90	93.49
			7.5 - 8	0.16			
<b>Totals:</b>	--	5,521	--	--	204.48	--	97.79
						<b>Volume Weighted Average:</b>	<b>0.48</b>

**8- TO 9-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-7	18	820	8 - 9	0.0195	30.36	0.02	0.59
2-SB-8	17	1,063	8 - 9	0.02	39.37	0.02	0.79
2-SB-9	16	981	8 - 9	0.01975	36.34	0.02	0.72
2-SB-10	15	722	8 - 9	0.0195	26.74	0.02	0.52
2-SB-11	19	514	8 - 9	0.0185	19.05	0.02	0.35
2-SB-14	20	365	8 - 9	0.039	13.51	0.04	0.53
I8-4-7-21	14	1,056	8 - 8.5	0.349	39.12	0.31	11.97
			8.5 - 9	0.263			
<b>Totals:</b>	--	5,521	--	--	204.49	--	15.47
						<b>Volume Weighted Average:</b>	<b>0.08</b>

**9- TO 10-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-7	13	2,139	9 - 10	0.0195	79.22	0.02	1.54
2-SB-8	12	1,165	9 - 10	0.02	43.13	0.02	0.86
2-SB-9	11	981	9 - 10	0.01975	36.34	0.02	0.72
2-SB-10	10	722	9 - 10	0.0195	26.74	0.02	0.52
2-SB-11	14	514	9 - 10	0.0185	19.05	0.02	0.35
<b>Totals:</b>	--	5,521	--	--	204.49	--	4.00
						<b>Volume Weighted Average:</b>	<b>0.02</b>

**10- TO 12-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-8	7	3,304	10 - 12	0.0185	244.72	0.02	4.53
2-SB-9	6	1,395	10 - 12	0.019	103.35	0.02	1.96
2-SB-11	8	822	10 - 12	0.0185	60.91	0.02	1.13
<b>Totals:</b>	--	5,521	--	--	408.98	--	7.62
						<b>Volume Weighted Average:</b>	<b>0.02</b>

**TABLE A-9  
EXISTING CONDITIONS  
PARCEL 18-4-7: 0- TO 15-FOOT DEPTH INCREMENT**

**SUPPLEMENTAL SOIL EVALUATION REPORT AND  
RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN  
PROPERTIES ADJACENT TO THE 1-1/2 MILE REACH OF HOUSATONIC RIVER**

**GENERAL ELECTRIC COMPANY - PITTSFIELD, MASSACHUSETTS**

**12- TO 15-FOOT DEPTH INCREMENT**

Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
2-SB-8	5	3,304	12 - 15	<b>0.0185</b>	367.07	0.02	6.79
2-SB-9	4	2,218	12 - 15	<b>0.019</b>	246.39	0.02	4.68
<b>Totals:</b>	--	5,521	--	--	613.47	--	11.47
<b>Volume Weighted Average:</b>							<b>0.02</b>

**SUMMARY - 0- TO 15-FOOT DEPTH INCREMENT**


Sample ID(s)	Polygon ID	Polygon Area (sq. ft.)	Sample Depth (ft.)	PCB Conc. (ppm)	Volume (cumulative) (cy)	Average PCB Concentration Per Foot	Average PCB Conc. TIMES Total Volume
<b>Totals:</b>	--	5,521	--	--	3,067.31	--	13,058.80
<b>Volume Weighted Average:</b>							<b>4.26</b>

Notes:

1. Non-detectable PCBs included as one-half the detection limit in calculations and shown in bold.
2. For instances where a duplicate sample was available, the average of the samples was included in table.
3. All calculations and rounding are performed by the computer software. Therefore, certain quantities in above table are displayed as rounded numbers for table clarity.


SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\_40122633.DWG SAVED:12/11/2006 11:11 AM LAYOUT:Layout1 PAGESETUP:----- PENTABLE:PLTFULLCTB PRINTED:12/11/2006 1:28 PM BY:DWODARCZYK

PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

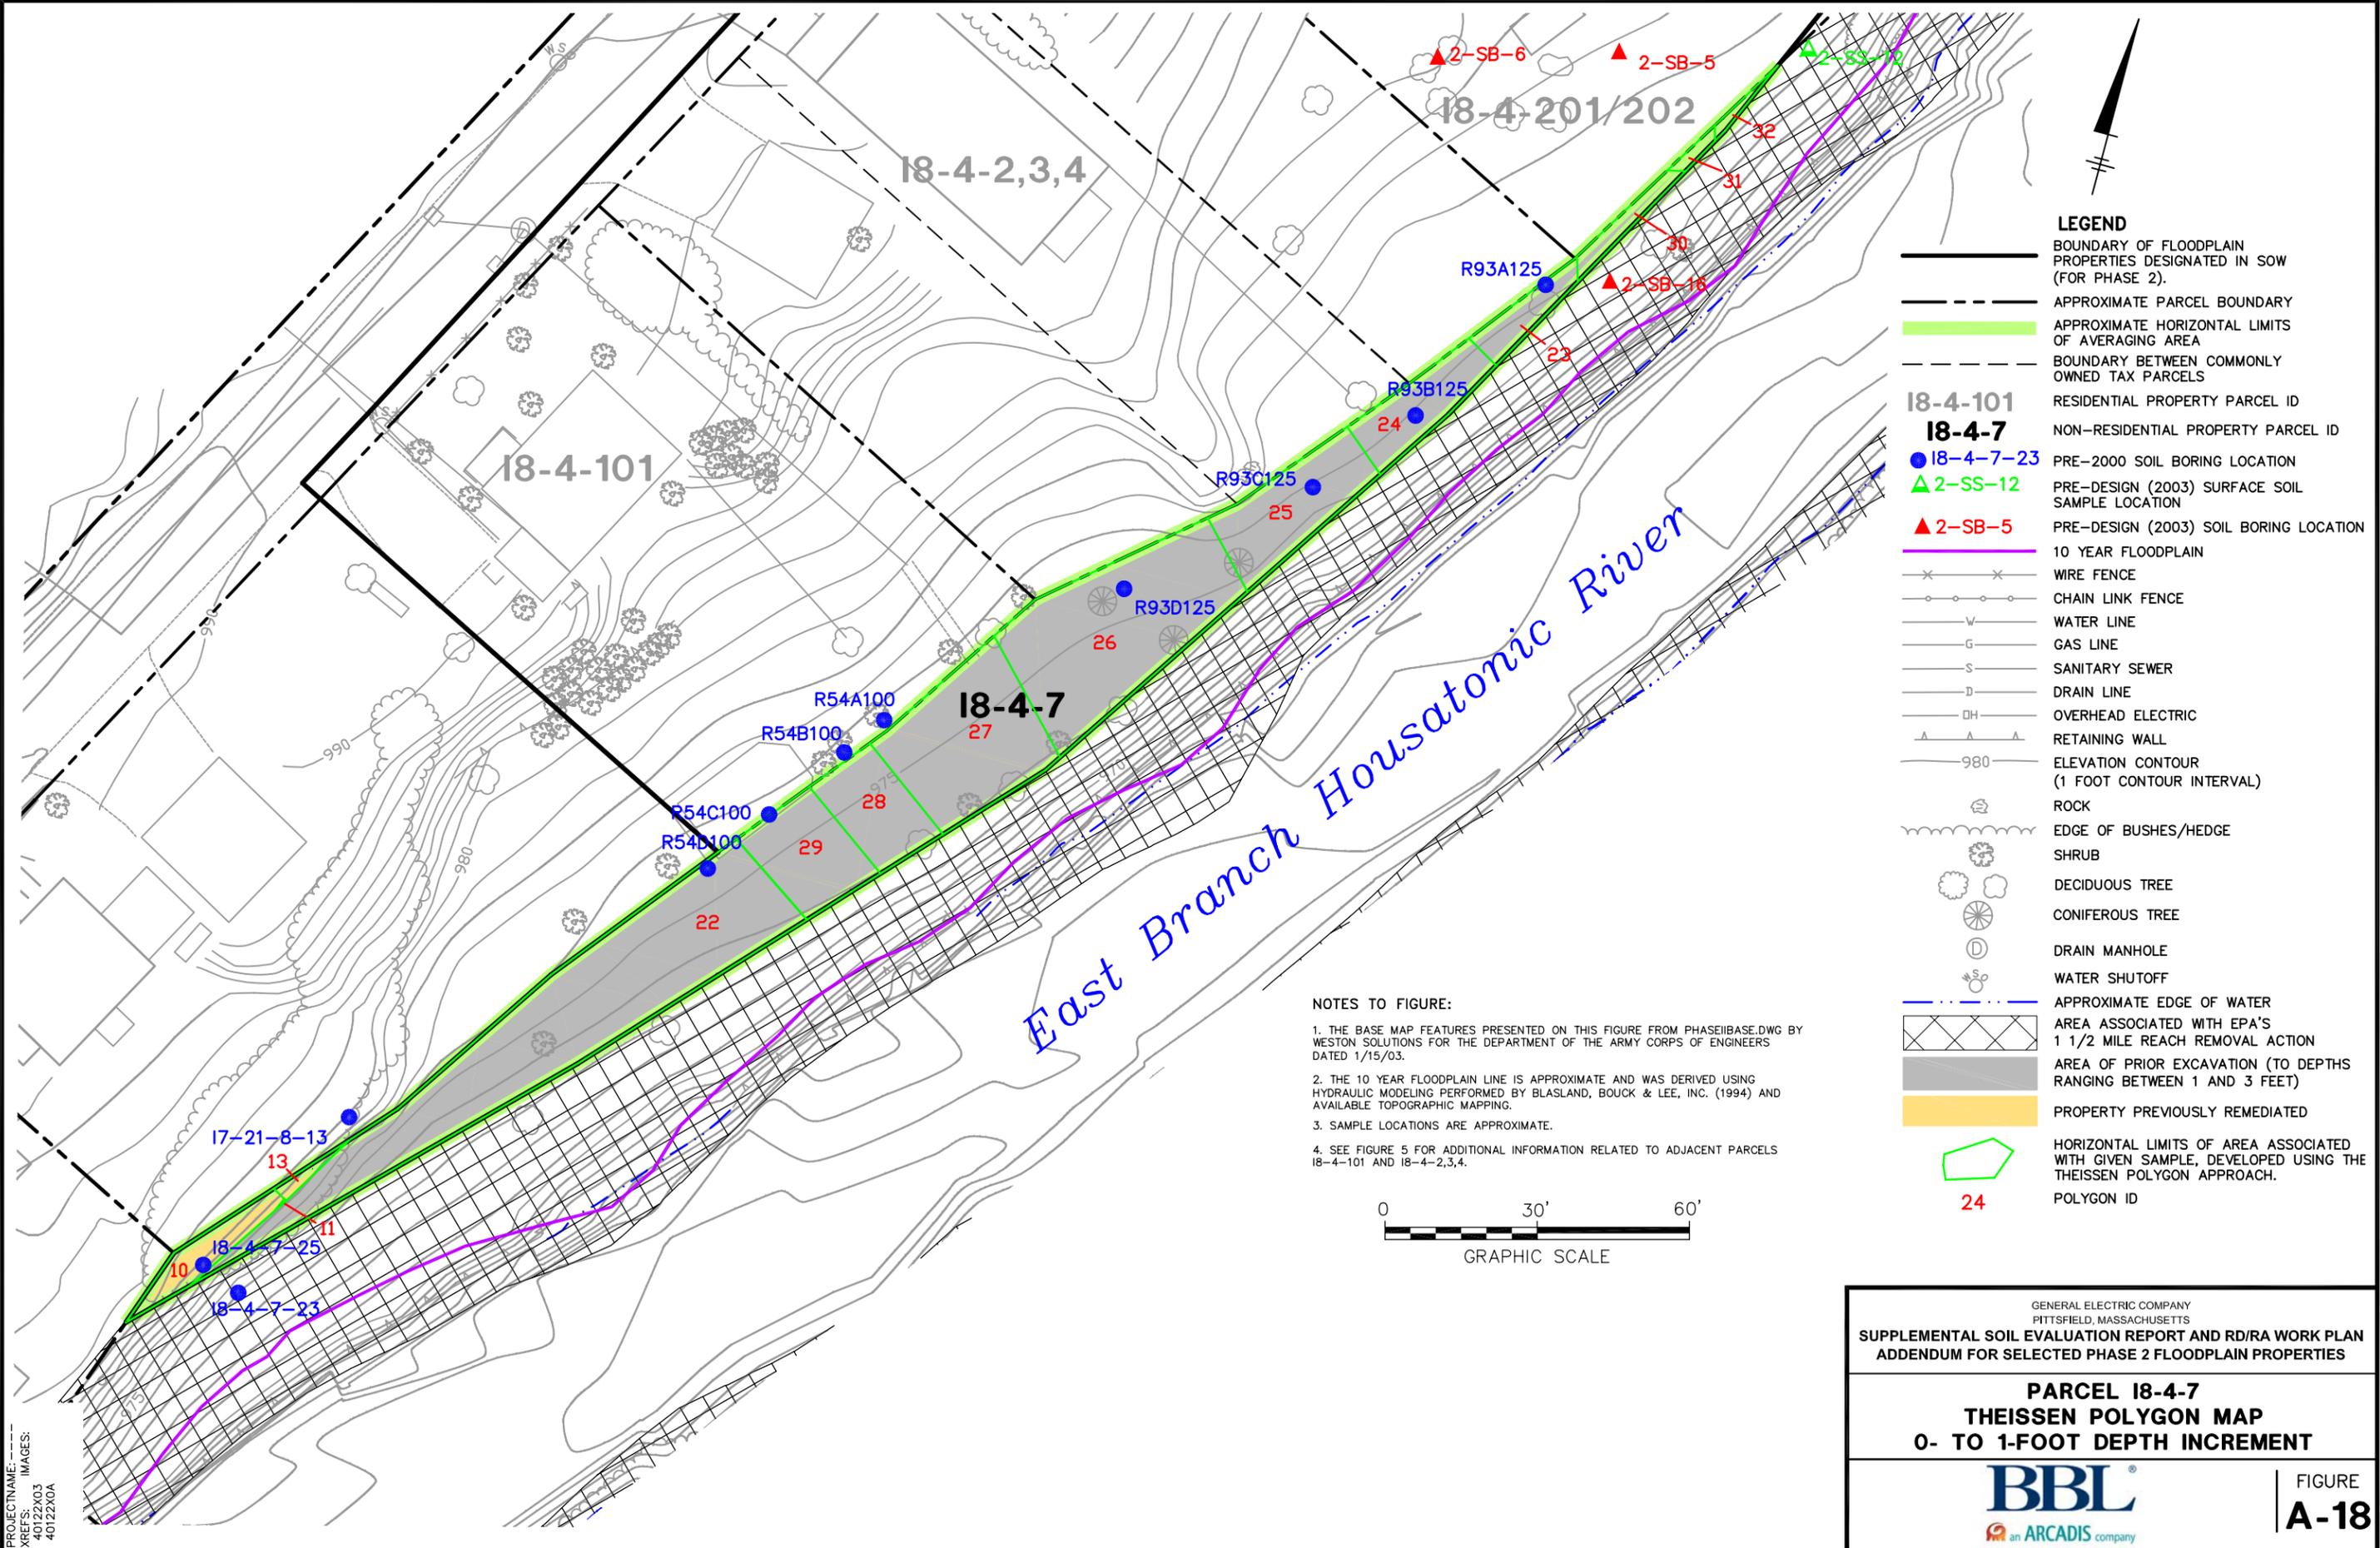

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - - - - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101 RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7-23 PRE-2000 SOIL BORING LOCATION
  - ▲ 2-SS-12 PRE-DESIGN (2003) SURFACE SOIL SAMPLE LOCATION
  - ▲ 2-SB-5 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - WIRE FENCE
  - CHAIN LINK FENCE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - RETAINING WALL
  - ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 3 FEET)
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 24 POLYGON ID

GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 0- TO 1-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company


FIGURE  
**A-18**

SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122634.DWG SAVED: 12/11/2006 11:12 AM LAYOUT: Layout1 PAGESETUP: PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:29 PM BY: DWODARCZYK  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

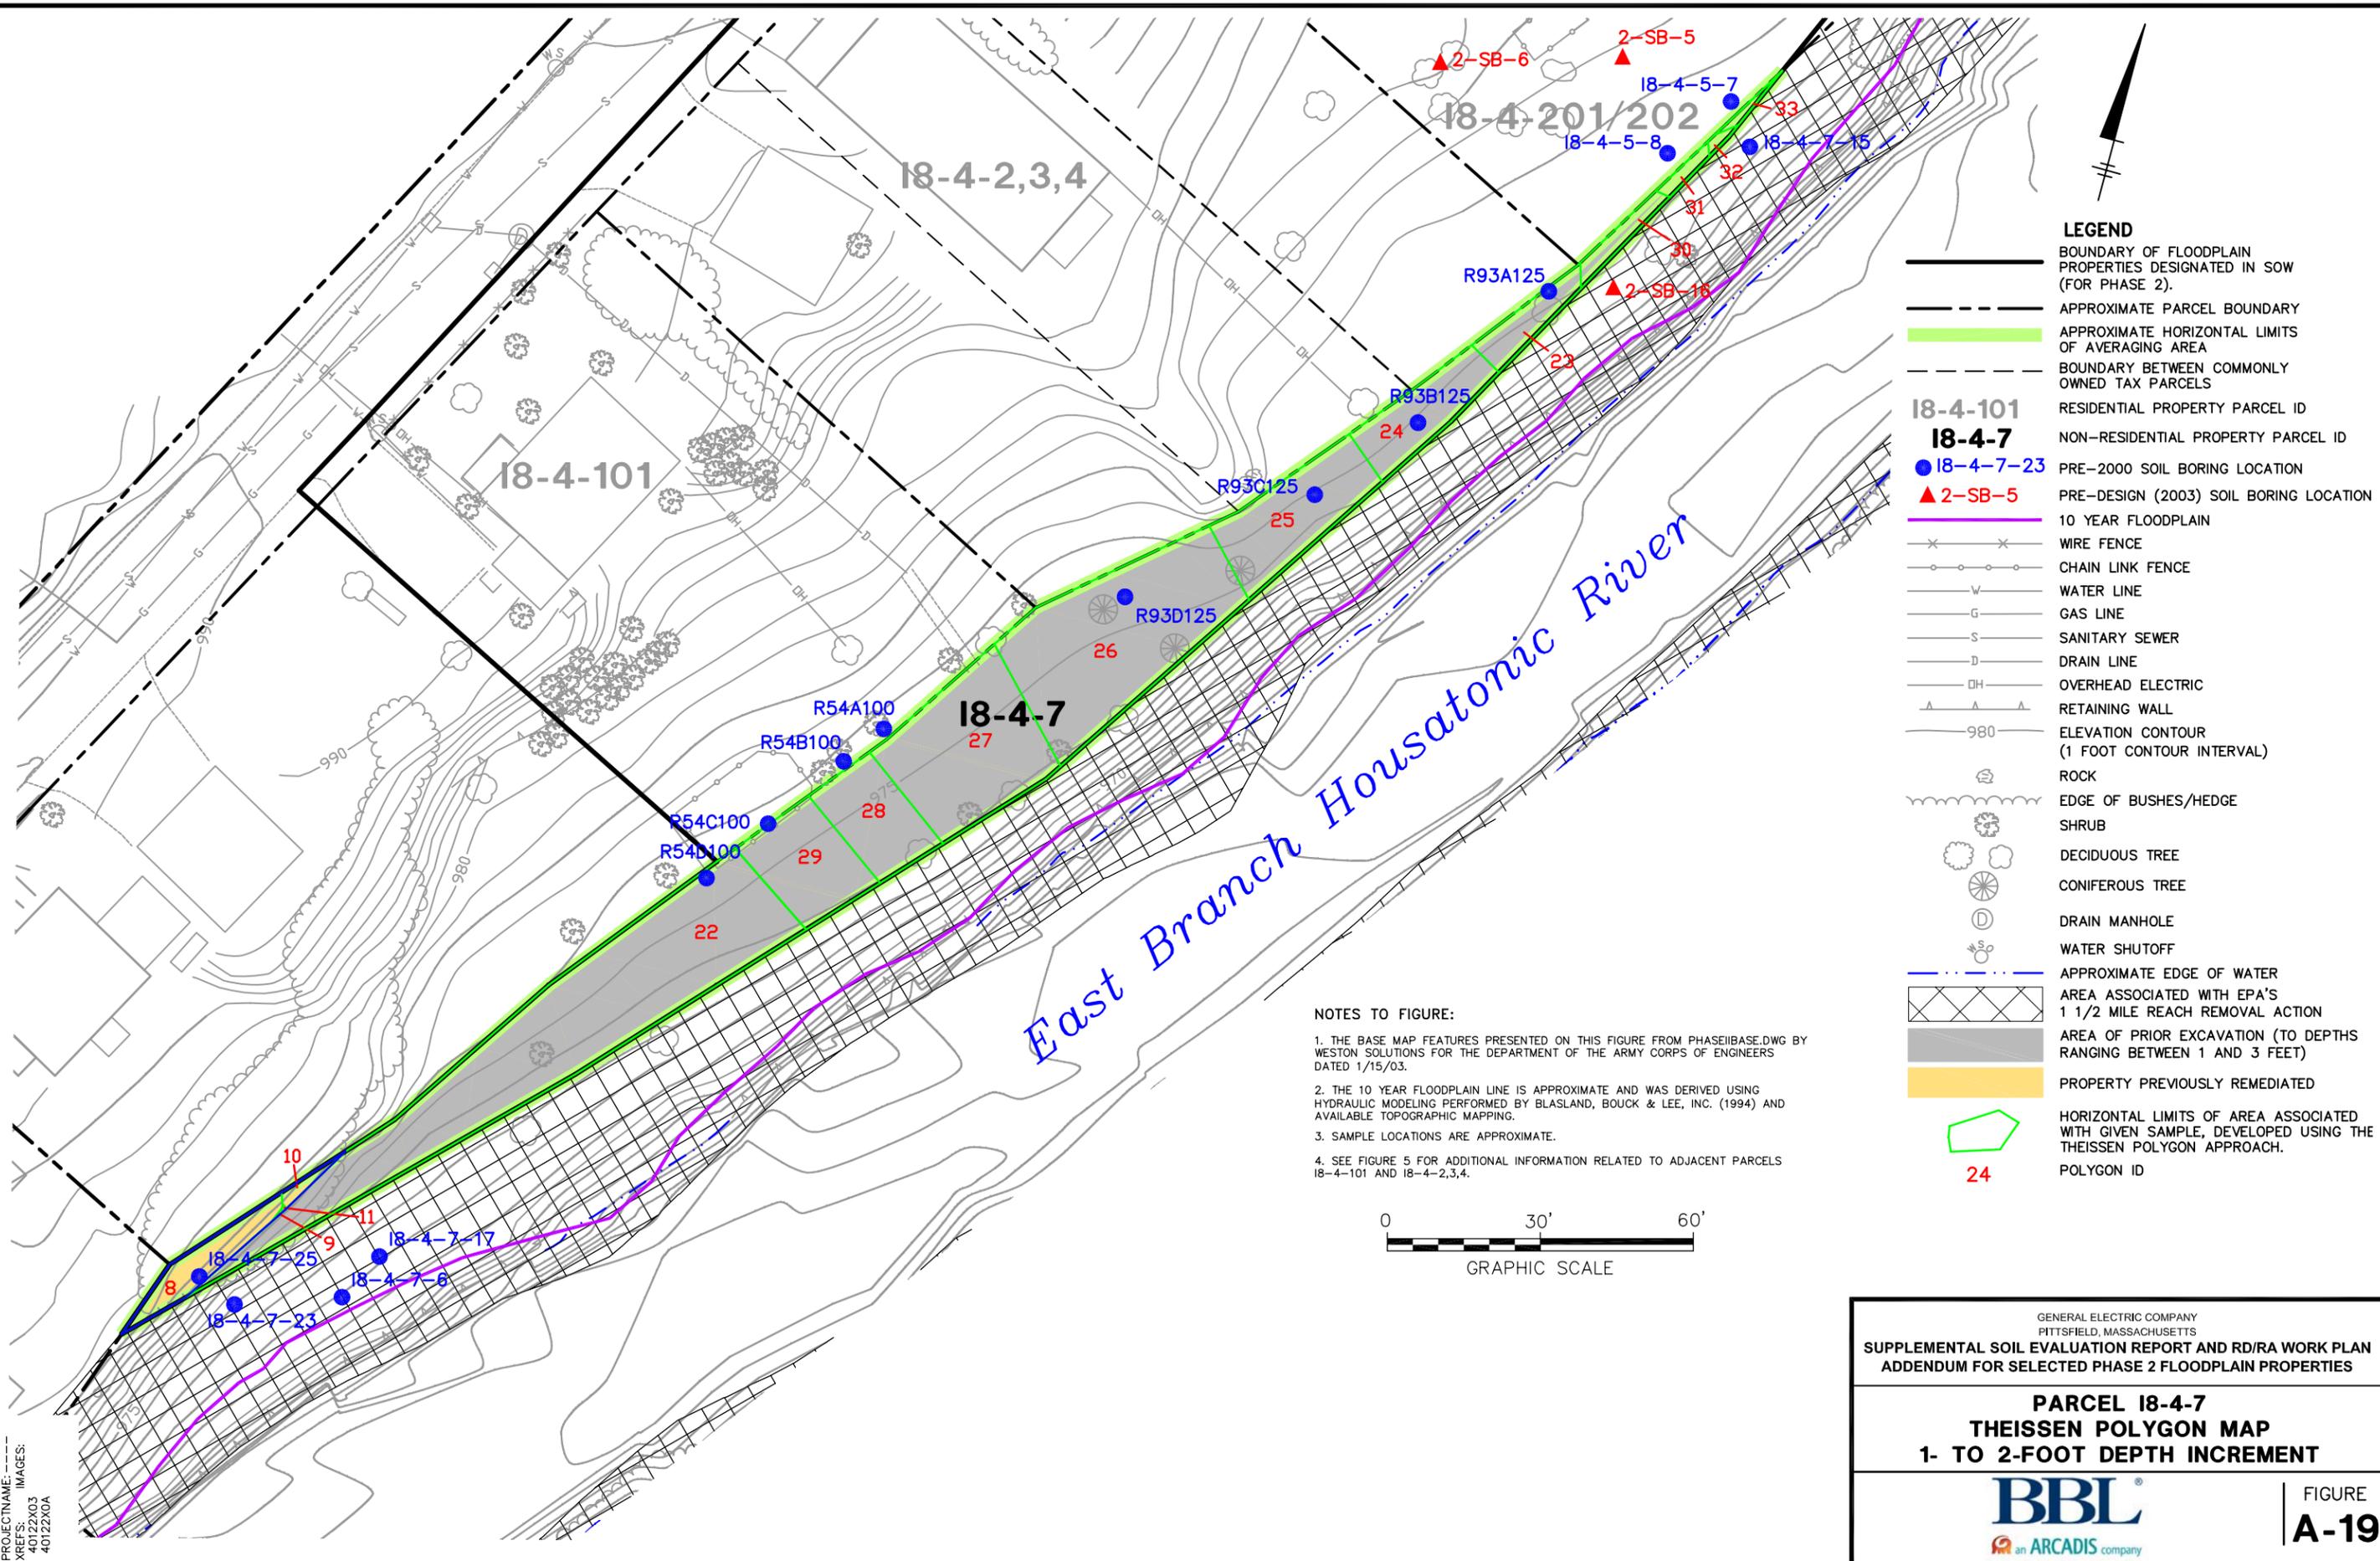

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - - - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101 RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7-23 PRE-2000 SOIL BORING LOCATION
  - ▲ 2-SB-5 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - × × WIRE FENCE
  - ○ CHAIN LINK FENCE
  - W WATER LINE
  - G GAS LINE
  - S SANITARY SEWER
  - D DRAIN LINE
  - OH OVERHEAD ELECTRIC
  - ▲ A RETAINING WALL
  - 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ⊞ ROCK
  - ~ EDGE OF BUSHES/HEDGE
  - ⊞ SHRUB
  - ⊞ DECIDUOUS TREE
  - ⊞ CONIFEROUS TREE
  - ⊞ D DRAIN MANHOLE
  - ⊞ W WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - ⊞ AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - ⊞ AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 3 FEET)
  - ⊞ PROPERTY PREVIOUSLY REMEDIATED
  - ⊞ HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 24 POLYGON ID


GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN**  
**ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7**  
**THEISSEN POLYGON MAP**  
**1- TO 2-FOOT DEPTH INCREMENT**

  
 an ARCADIS company

FIGURE  
**A-19**


SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122635.DWG SAVED: 12/11/2006 11:13 AM LAYOUT: Layout1 PAGESETUP: PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:36 PM BY: DWODARCZYK  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

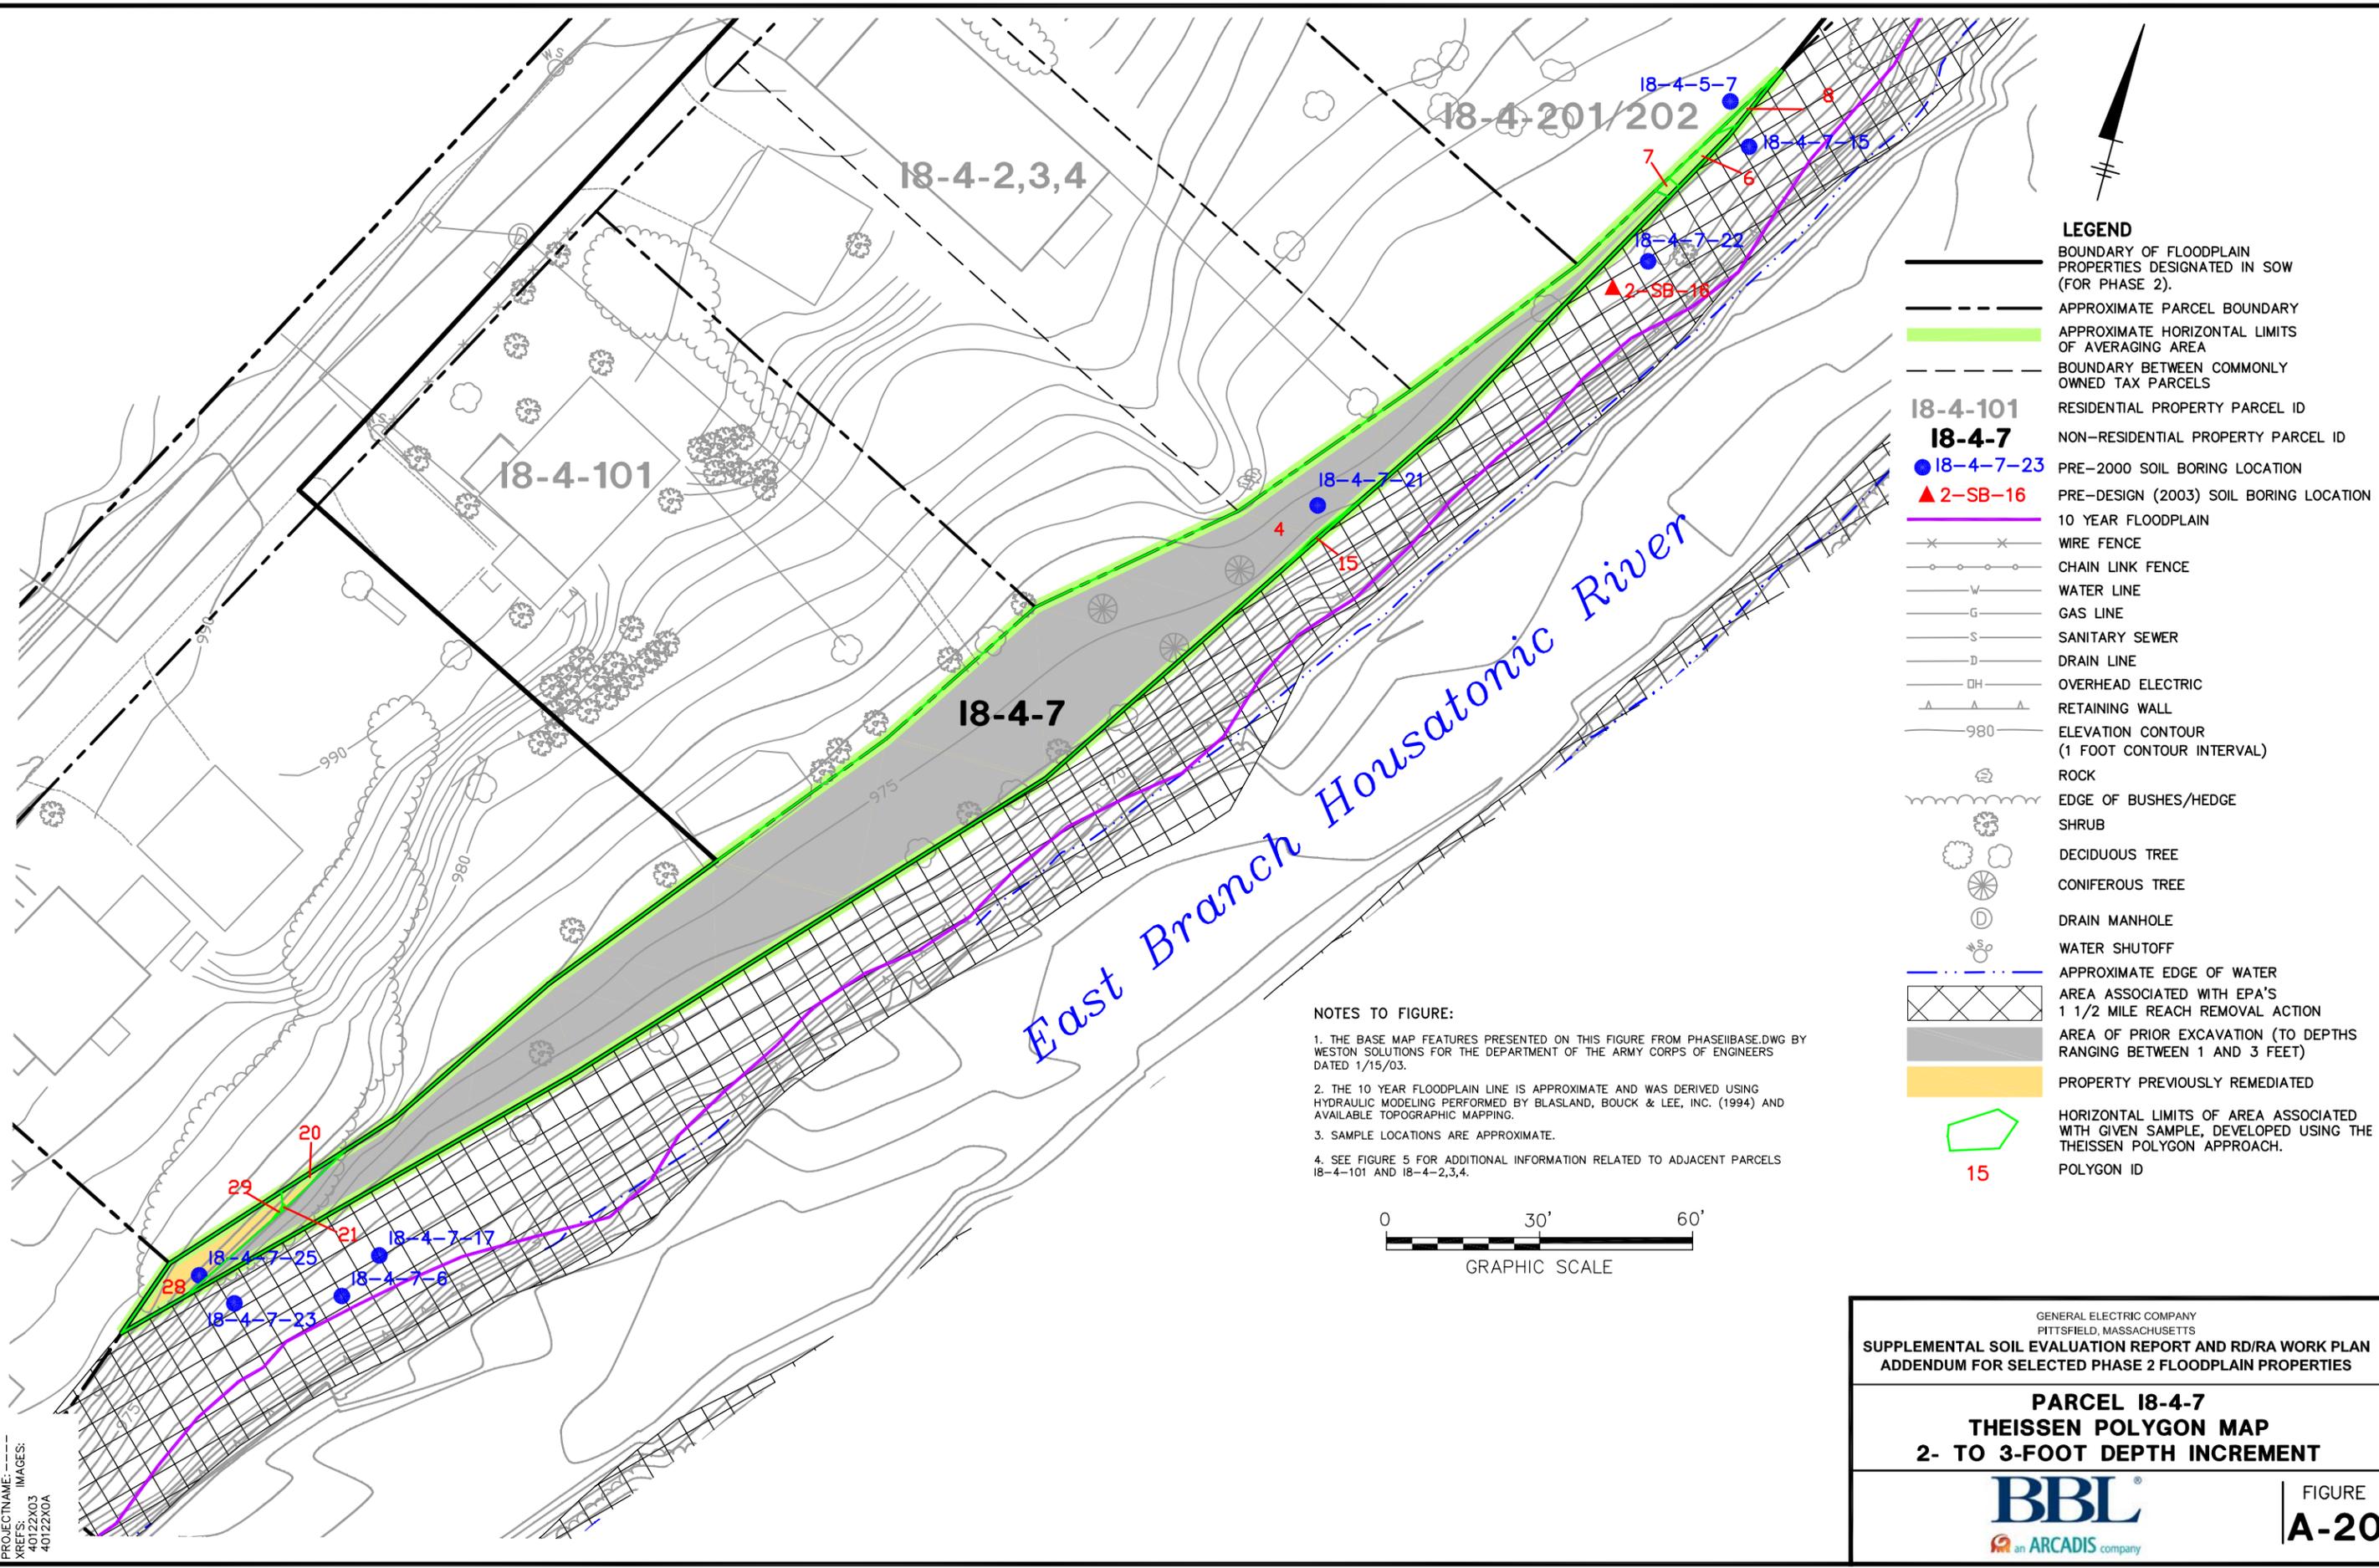

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - - - - - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - - - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - **18-4-7-23** PRE-2000 SOIL BORING LOCATION
  - ▲ **2-SB-16** PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - × × WIRE FENCE
  - ○ ○ CHAIN LINK FENCE
  - W WATER LINE
  - G GAS LINE
  - S SANITARY SEWER
  - D DRAIN LINE
  - OH OVERHEAD ELECTRIC
  - A A RETAINING WALL
  - 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ⊞ ROCK
  - ~ EDGE OF BUSHES/HEDGE
  - ⊞ SHRUB
  - ⊞ DECIDUOUS TREE
  - ⊞ CONIFEROUS TREE
  - ⊞ D DRAIN MANHOLE
  - ⊞ WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - ⊞ AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - ⊞ AREA OF PRIOR EXCAVATION (TO DEPTHS RANGING BETWEEN 1 AND 3 FEET)
  - ⊞ PROPERTY PREVIOUSLY REMEDIATED
  - ⊞ HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 15** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 2- TO 3-FOOT DEPTH INCREMENT**

BBL  
 an ARCADIS company

FIGURE  
**A-20**

SYR-85-NES KLS DMW L: ON=\* OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122636.DWG  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A  
 PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:37 PM BY: DWODARCZYK  
 LAYOUT: Layout1 PAGESETUP: -----  
 SAVED: 12/11/2006 11:14 AM

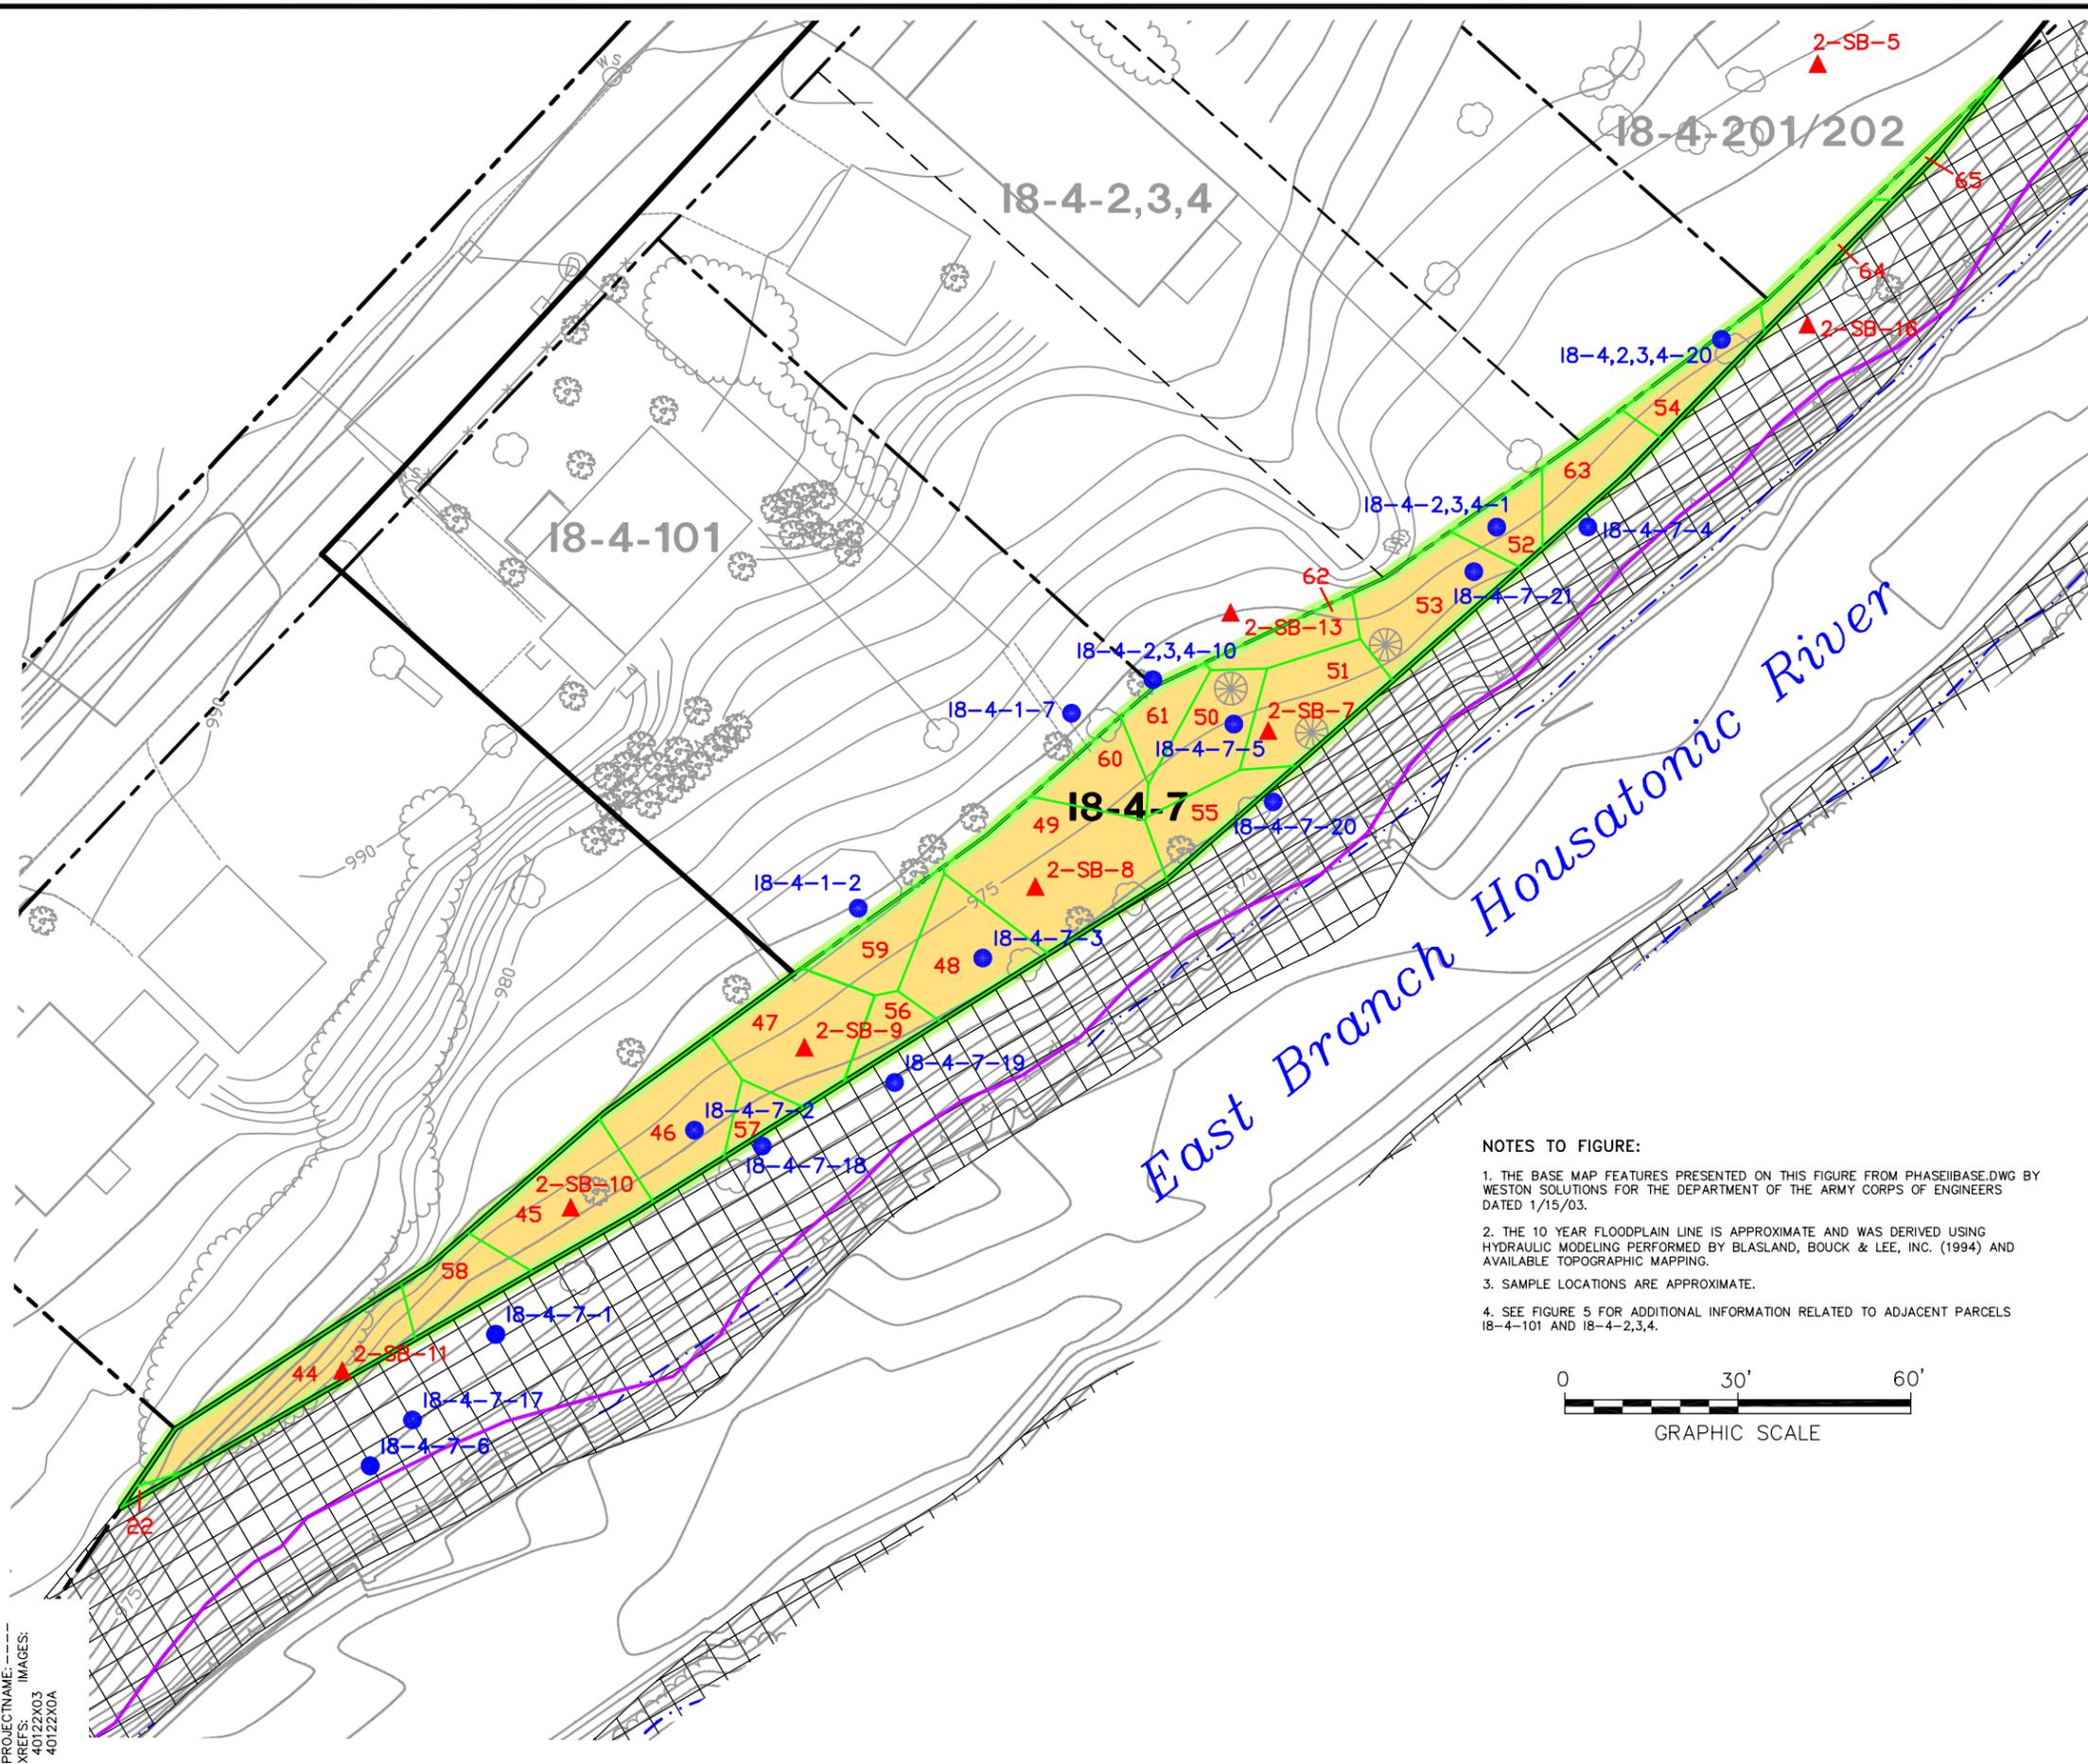


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7-1 PRE-2000 SOIL BORING LOCATION
- 2-SB-16 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH. POLYGON ID **51**

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 3- TO 4-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE **A-21**

SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122637.DWG  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A  
 PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:38 PM BY: DWODARCZYK  
 LAYOUT: Layout1 PAGESETUP: -----  
 SAVER: 12/11/2006 11:15 AM

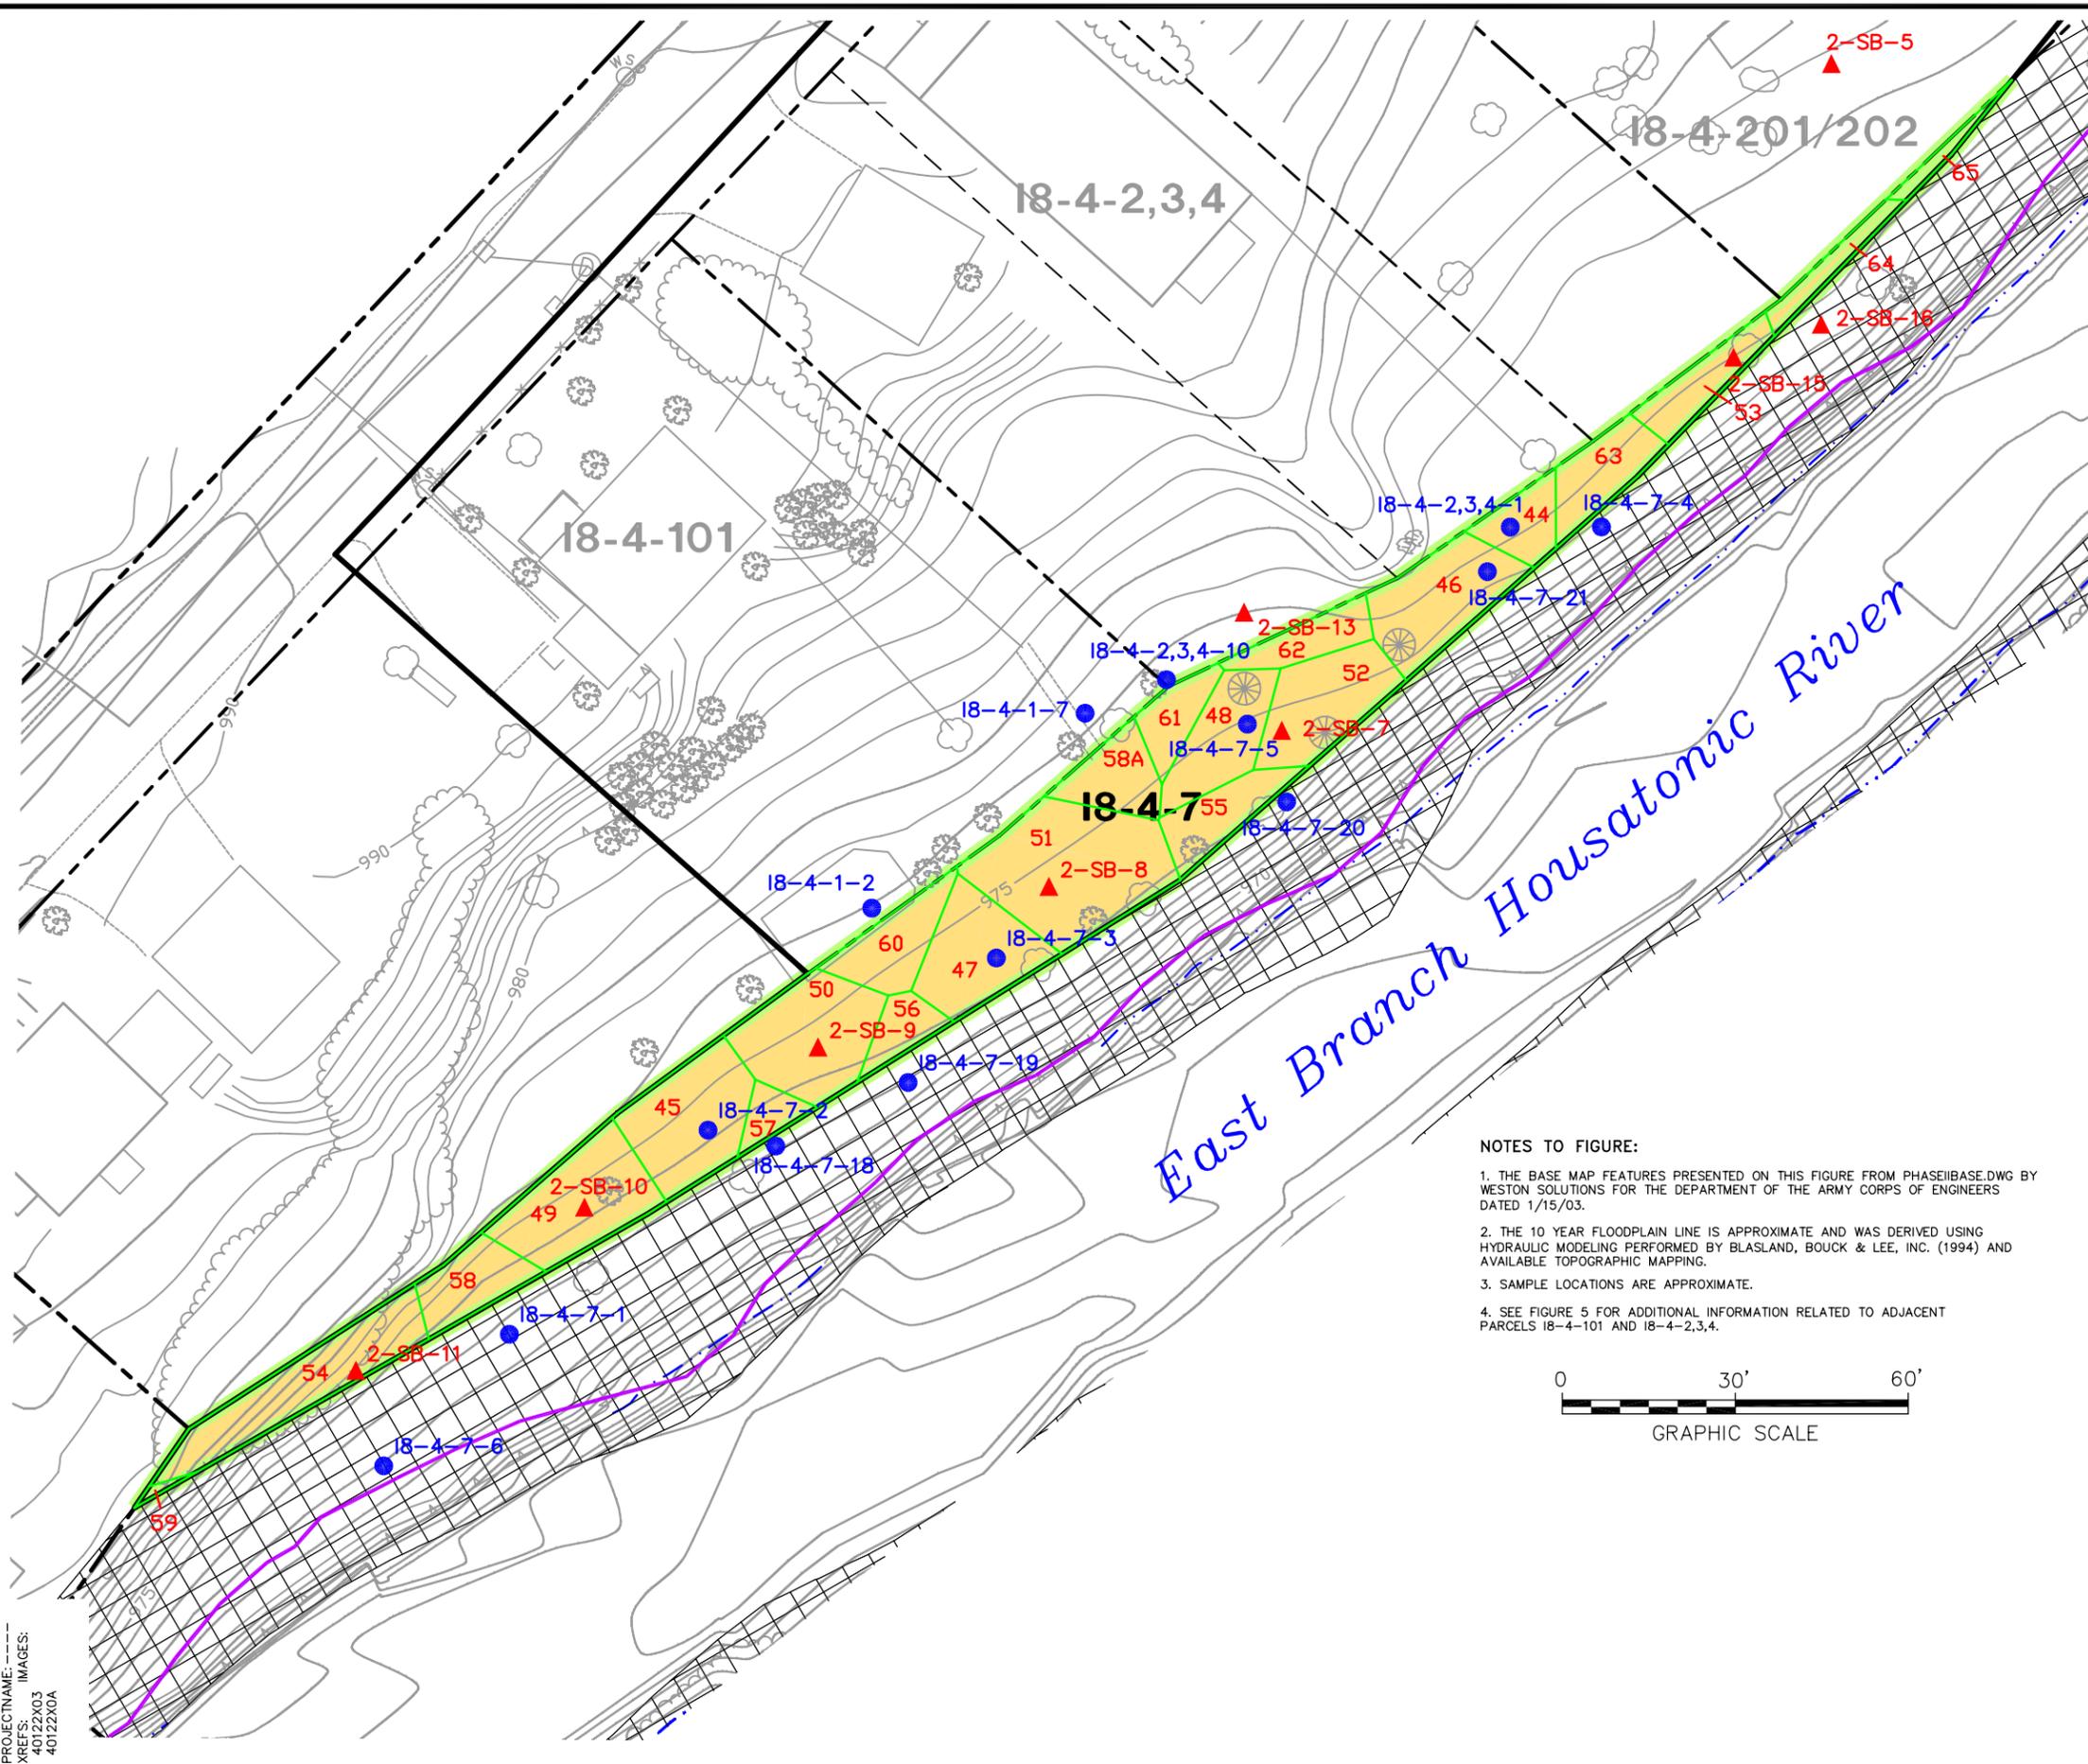


**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7-1 PRE-2000 SOIL BORING LOCATION
- 2-SB-16 PRE-DESIGN (2003) SOIL BORING LOCATION
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- PROPERTY PREVIOUSLY REMEDIATED
- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
- 51** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 4- TO 5-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-22**

SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\40122004 PHASE2 ADDENDUM\40122638.DWG  
 PROJECTNAME: 40122X03  
 XREFS: 40122X03  
 40122X0A  
 PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:39 PM BY: DWODARCZYK  
 LAYOUT: Layout1 PAGESETUP: PAGESETUP: 12/11/2006 11:16 AM

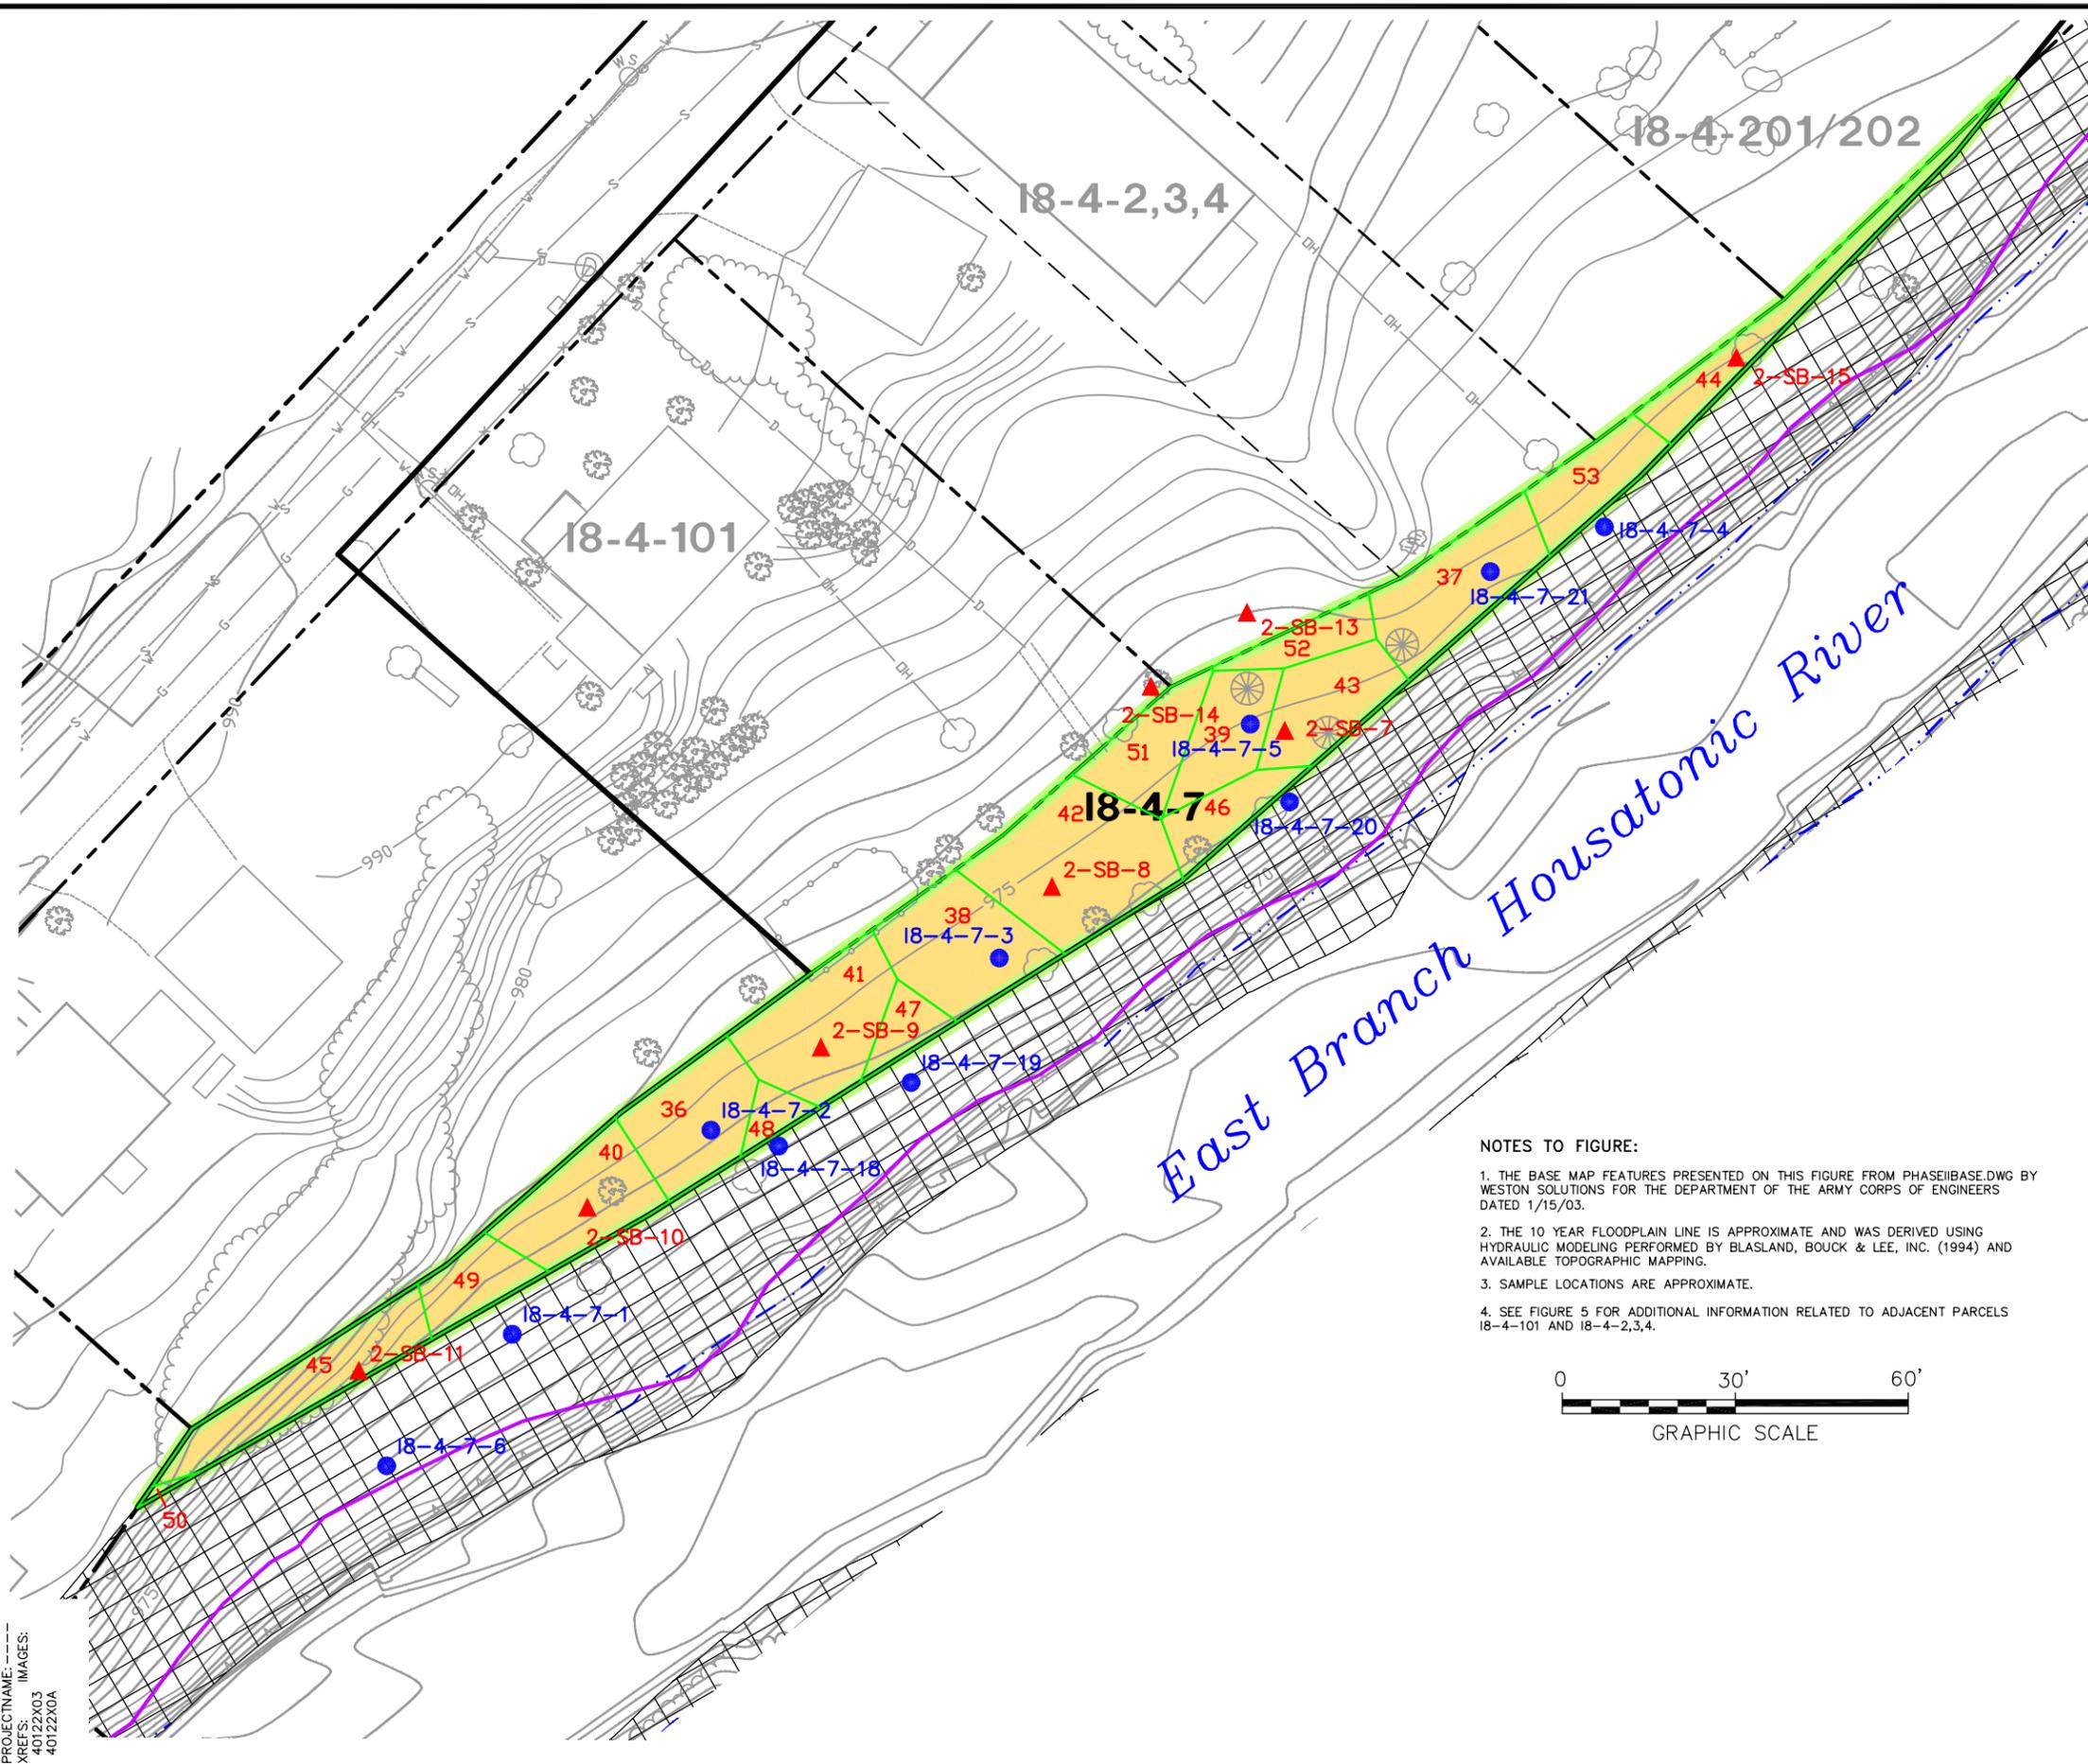

**LEGEND**

BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).

--- APPROXIMATE PARCEL BOUNDARY

--- APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA

--- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS

**18-4-101** RESIDENTIAL PROPERTY PARCEL ID

**18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID

● 18-4-7-1 PRE-2000 SOIL BORING LOCATION

▲ 2-SB-15 PRE-DESIGN (2003) SOIL BORING LOCATION

--- 10 YEAR FLOODPLAIN

--- WIRE FENCE

--- CHAIN LINK FENCE

--- WATER LINE

--- GAS LINE

--- SANITARY SEWER

--- DRAIN LINE

--- OVERHEAD ELECTRIC

--- RETAINING WALL

--- 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)

--- ROCK

--- EDGE OF BUSHES/HEDGE

--- SHRUB

--- DECIDUOUS TREE

--- CONIFEROUS TREE

--- DRAIN MANHOLE

--- WATER SHUTOFF

--- APPROXIMATE EDGE OF WATER

--- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION


--- PROPERTY PREVIOUSLY REMEDIATED

--- HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.

51 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 5- TO 6-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-23**


SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122639.DWG  
 PENTABLE:PLTFULLCTB PRINTED:12/11/2006 1:40 PM BY:DWODARCZYK  
 SAVED:12/11/2006 11:24 AM LAYOUT:Layout1 PAGESETUP:-----  
 PROJECTNAME:-----  
 XREFS: IMAGES:  
 40122X03  
 40122X0A

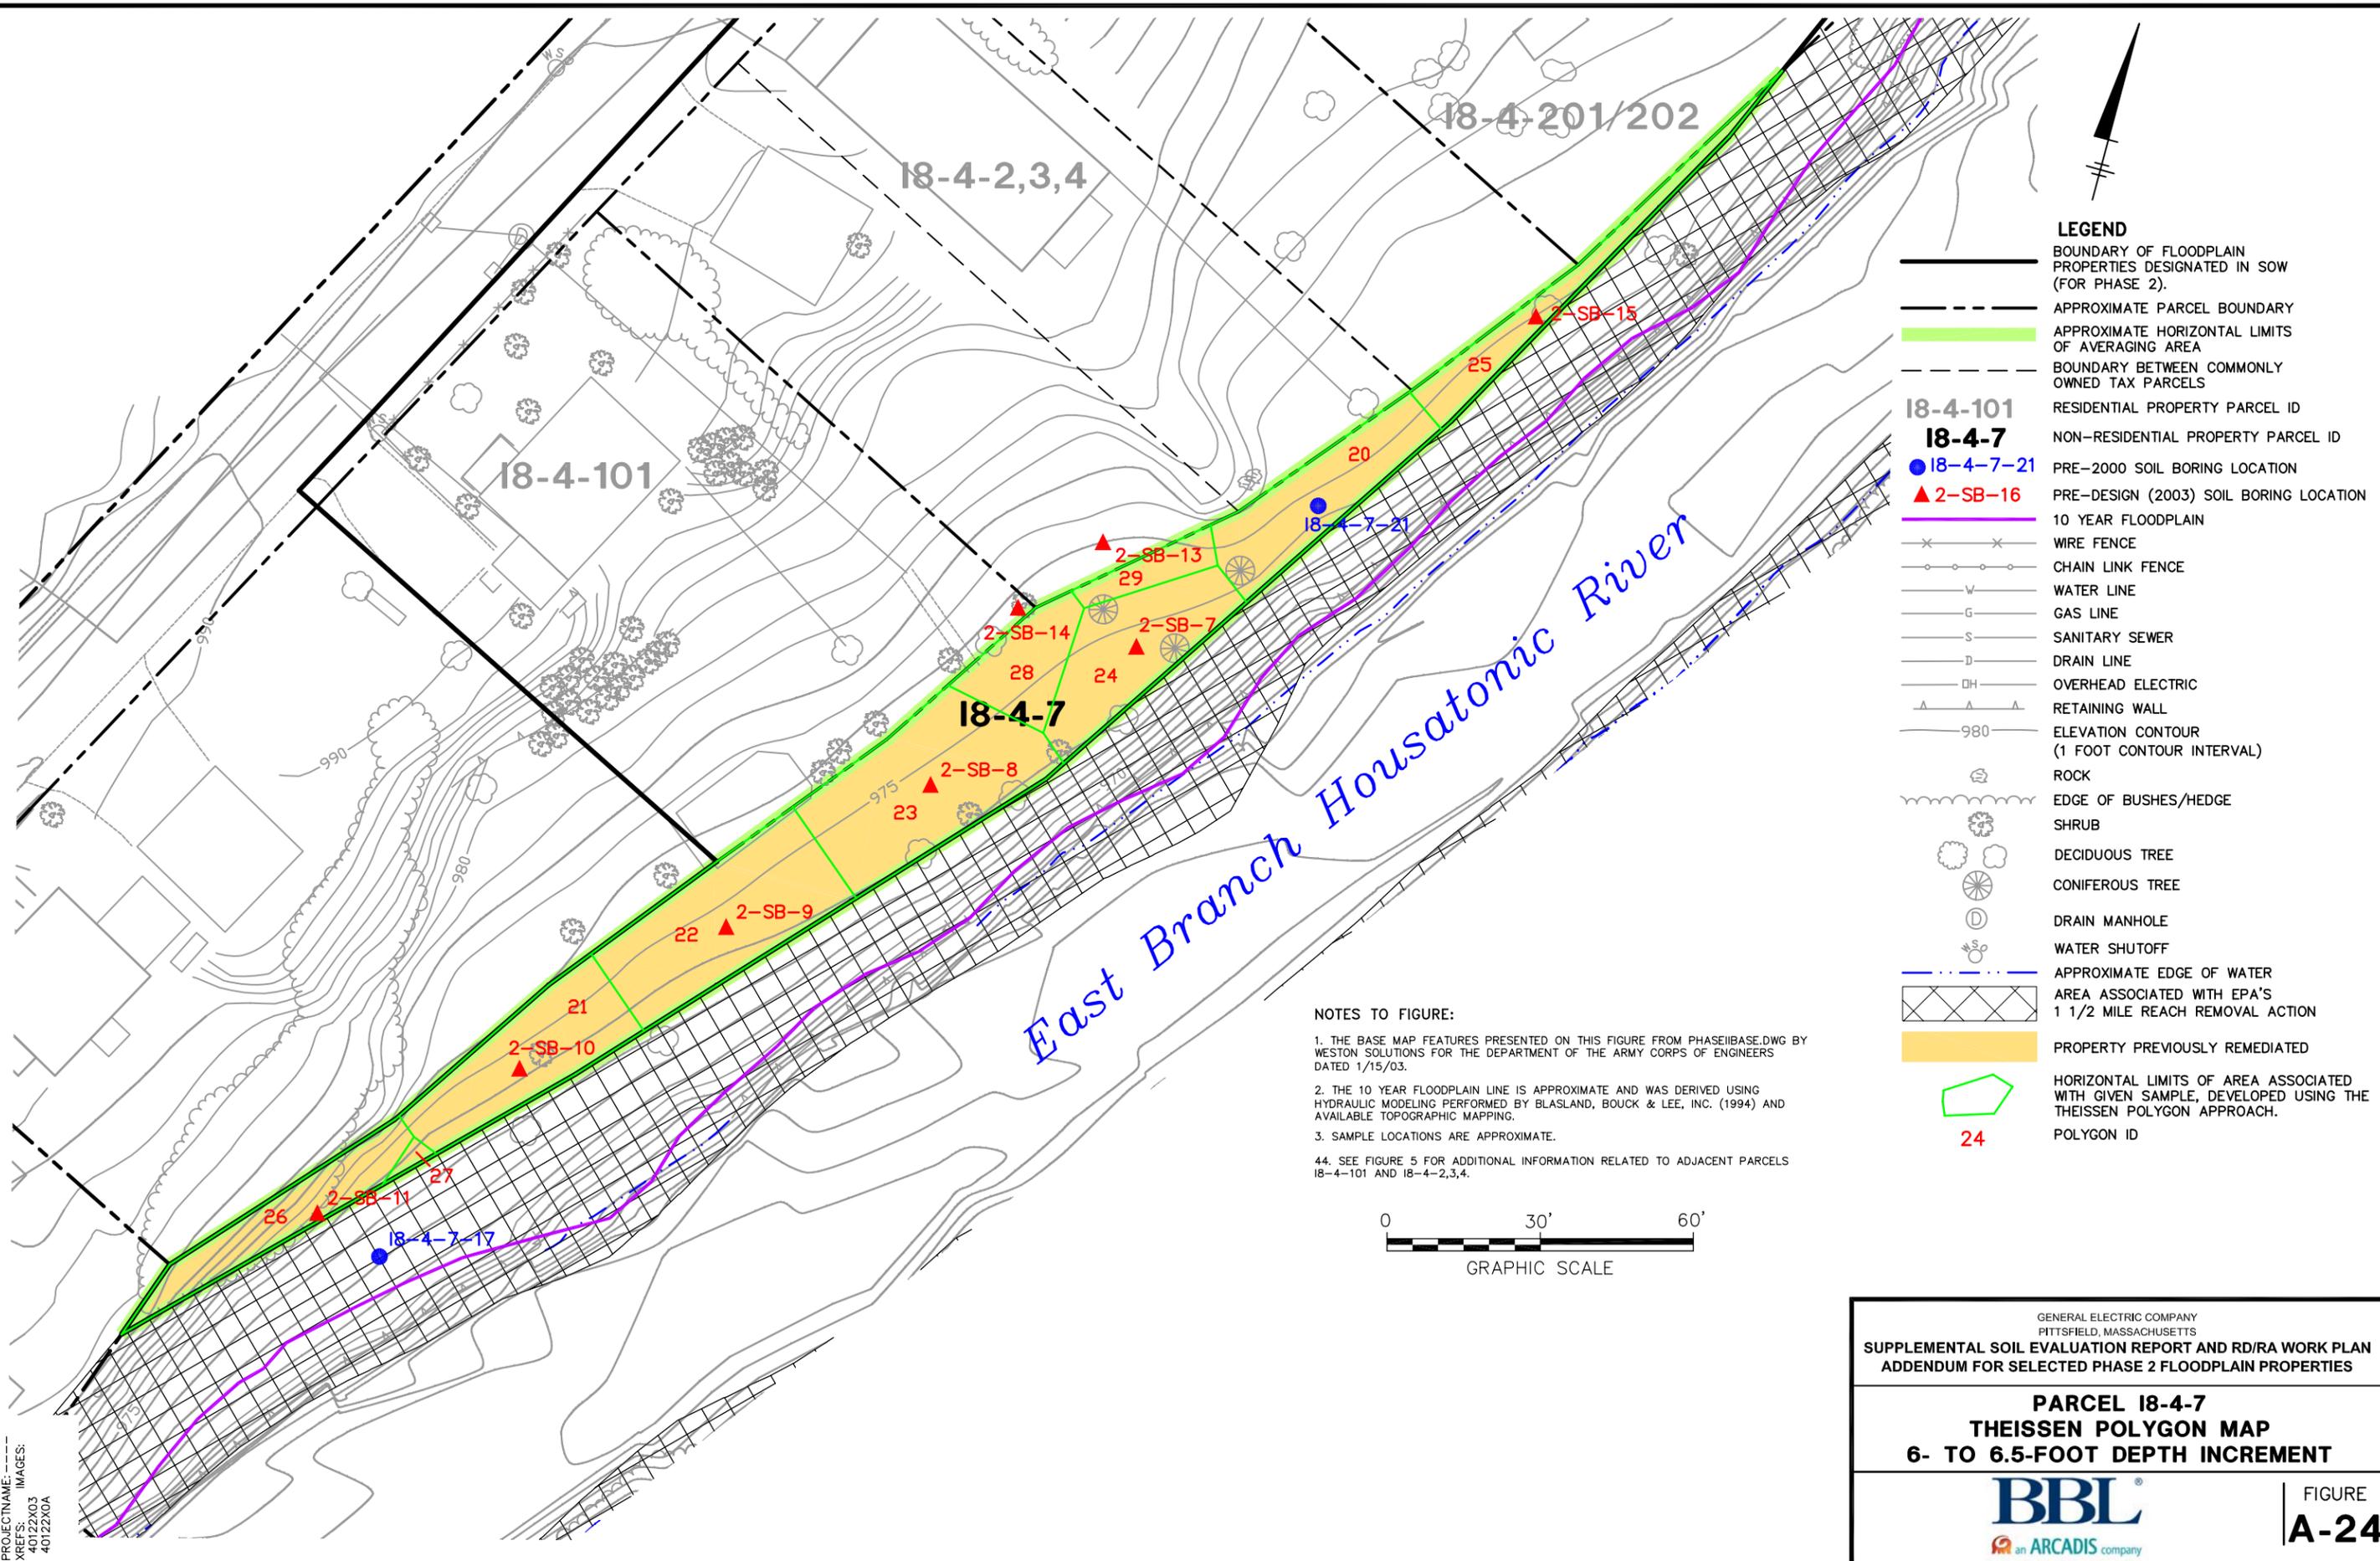

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7-21 PRE-2000 SOIL BORING LOCATION
  - 2-SB-16 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - WIRE FENCE
  - CHAIN LINK FENCE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - RETAINING WALL
  - ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 24** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
44. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 6- TO 6.5-FOOT DEPTH INCREMENT**

an ARCADIS company

FIGURE  
**A-24**

SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122040.DWG SAVED:12/11/2006 11:26 AM LAYOUT: Layout1 PAGESETUP: PENTABLE: PLTFULL.CTB PRINTED:12/11/2006 1:41 PM BY: DWODARCZYK


PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

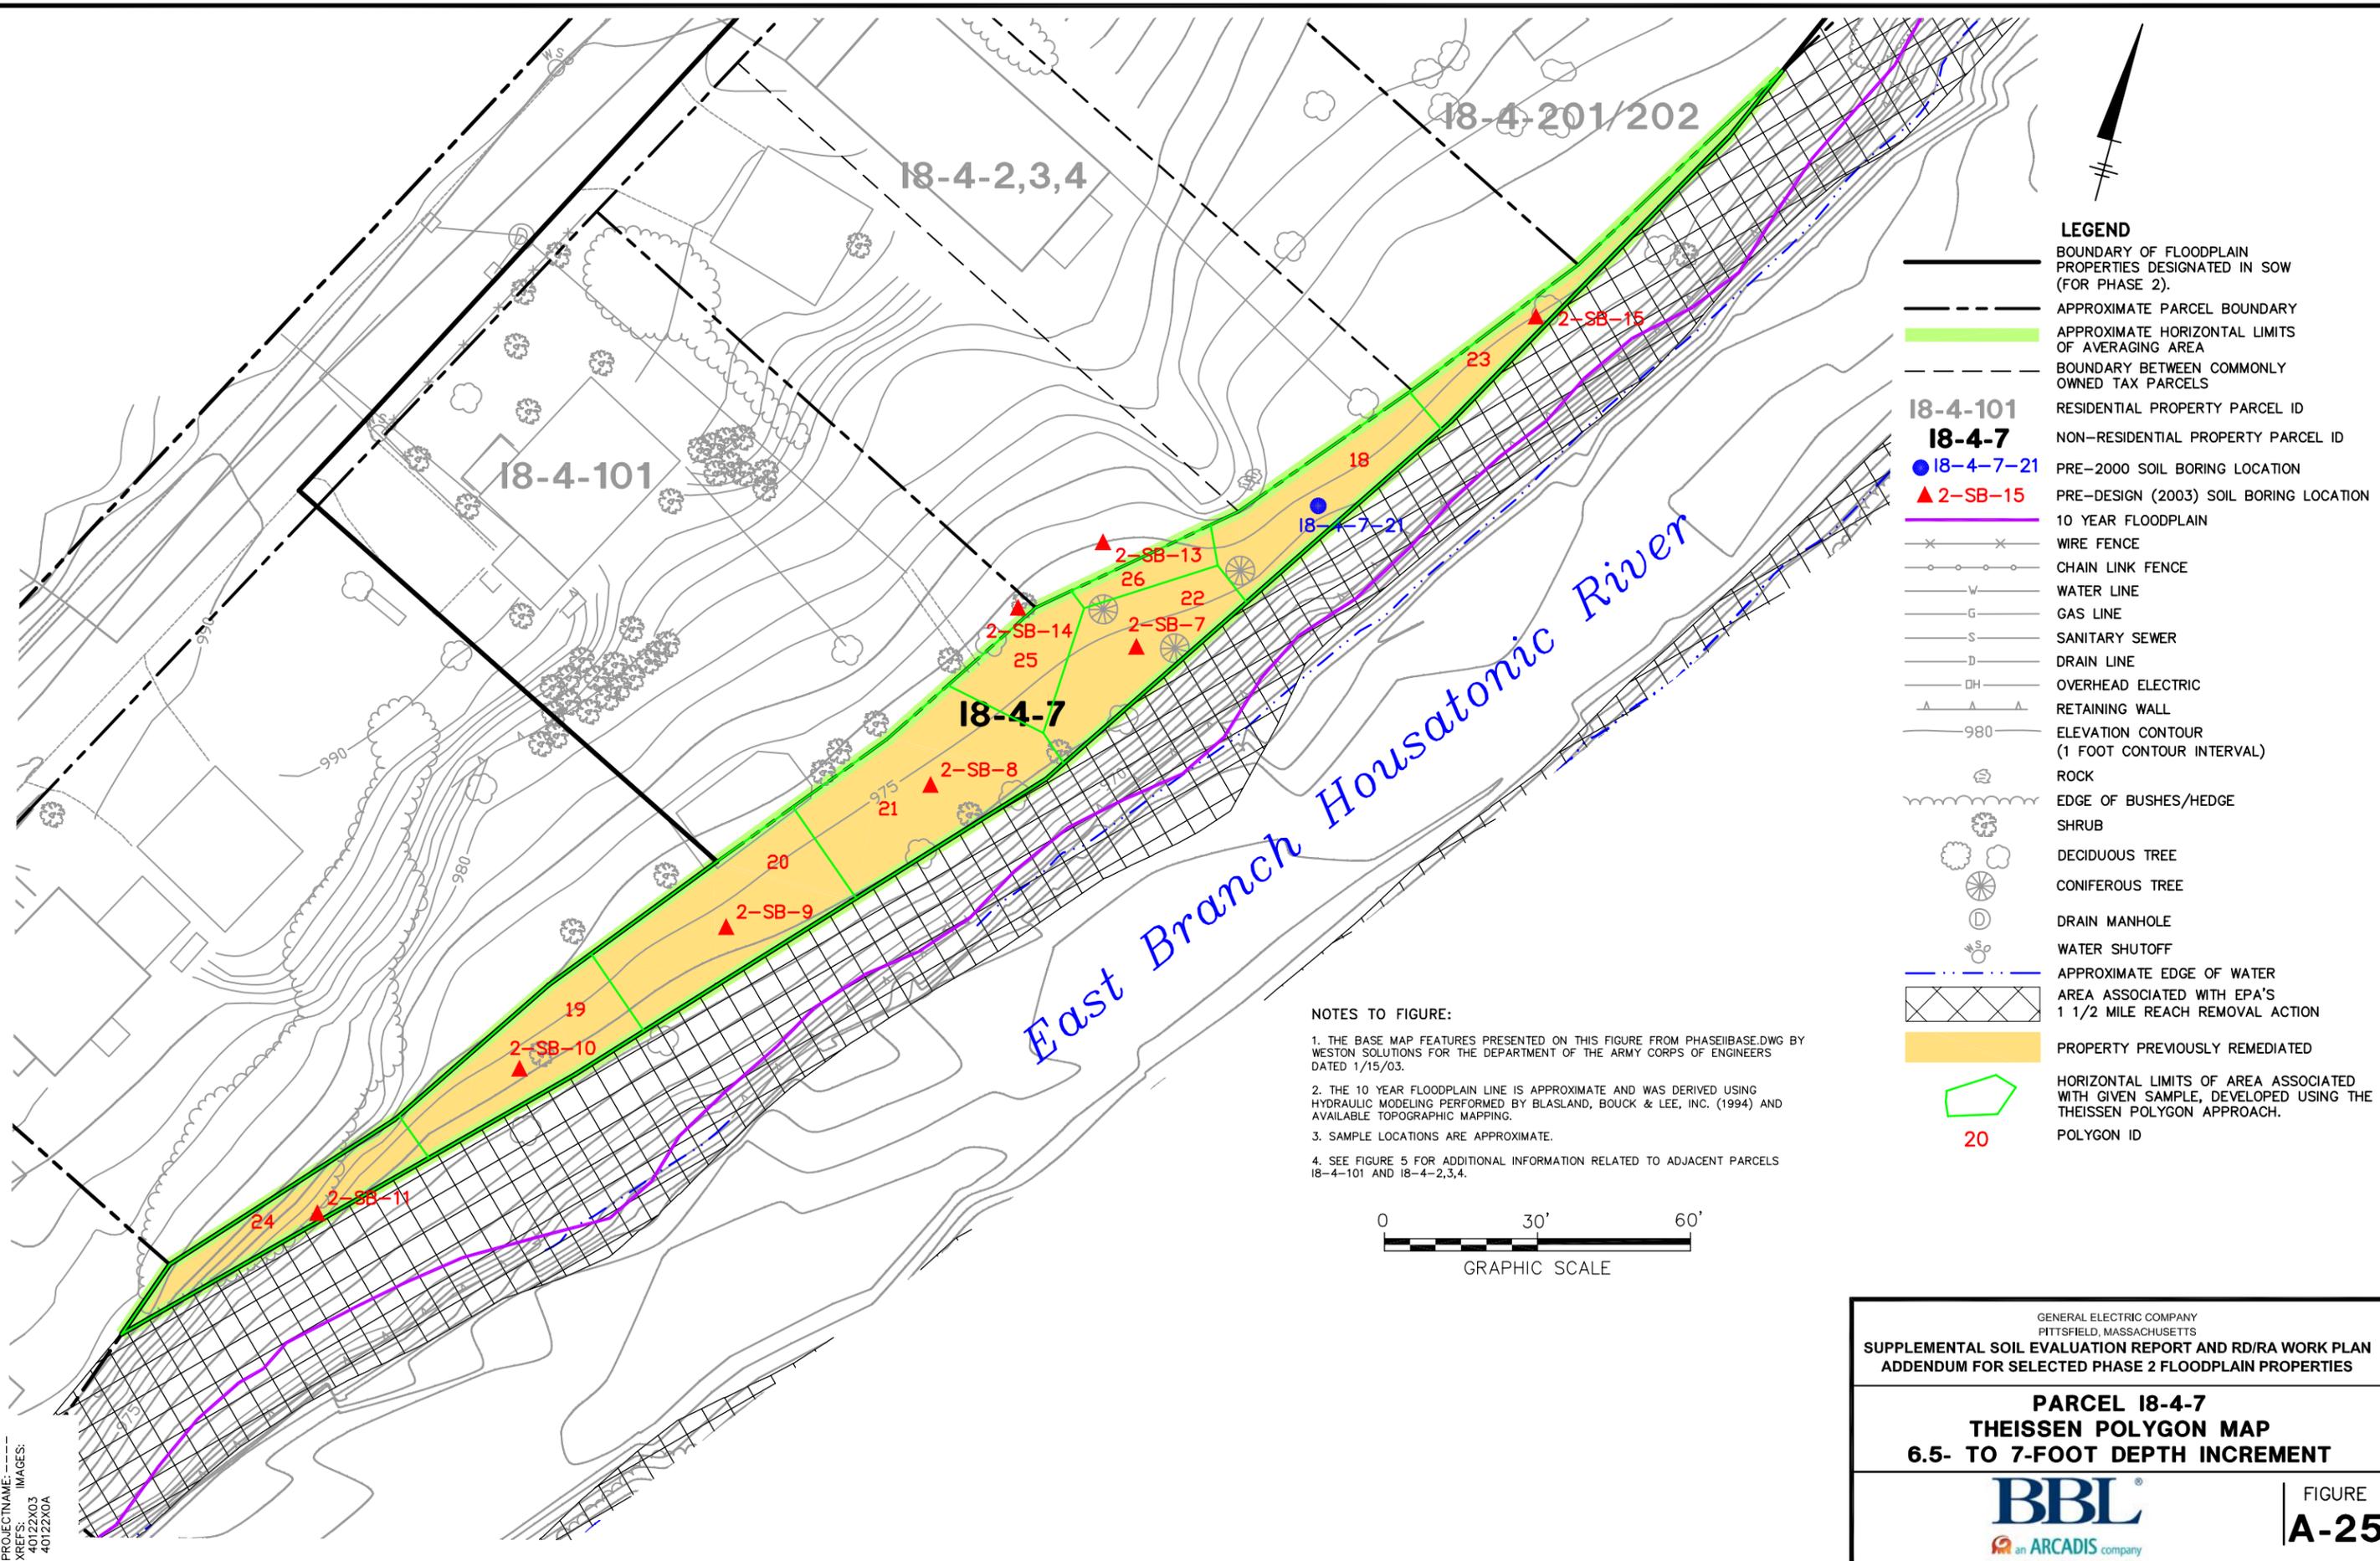

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - - - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101 RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7-21 PRE-2000 SOIL BORING LOCATION
  - ▲ 2-SB-15 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - × × × WIRE FENCE
  - ○ ○ CHAIN LINK FENCE
  - W WATER LINE
  - G GAS LINE
  - S SANITARY SEWER
  - D DRAIN LINE
  - OH OVERHEAD ELECTRIC
  - ▲ ▲ ▲ RETAINING WALL
  - 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - D DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 20 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 6.5- TO 7-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-25**

SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122041.DWG SAVED: 12/11/2006 11:27 AM LAYOUT: Lyou11 PAGESETUP: PENTABLE: PLTFULLCTB PRINTED: 12/11/2006 1:41 PM BY: DWODARCZYK


PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

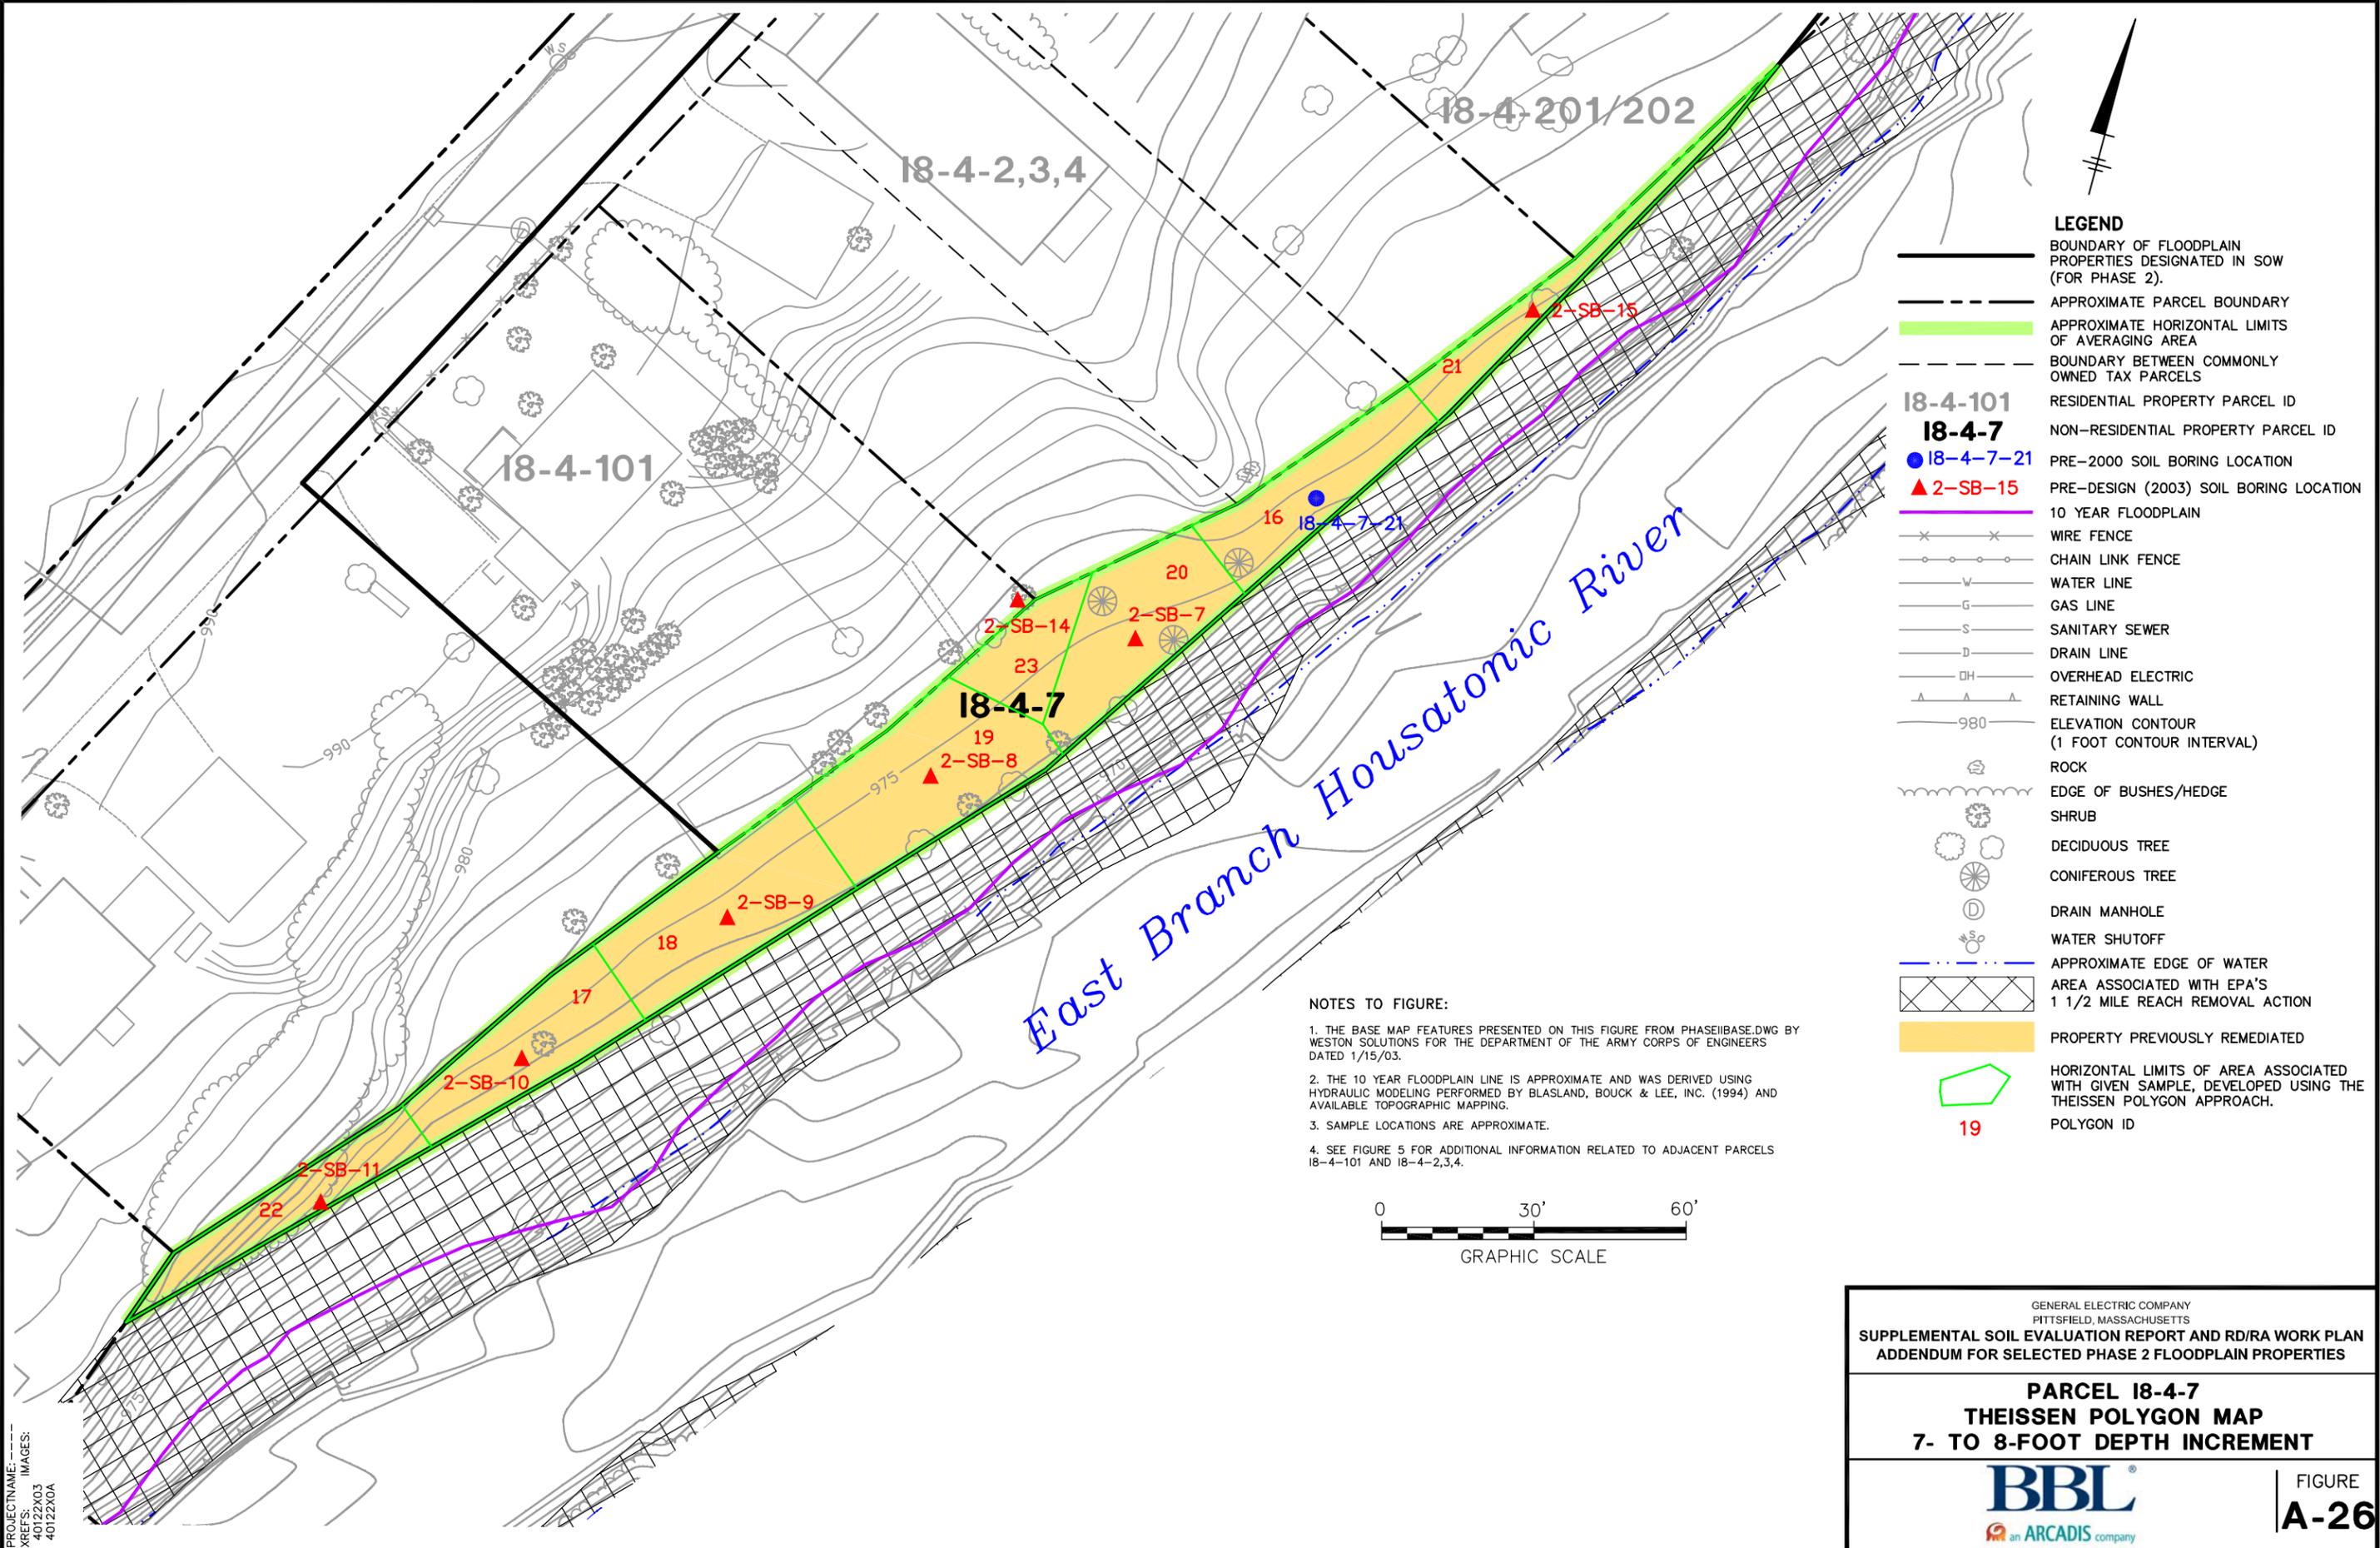

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7-21 PRE-2000 SOIL BORING LOCATION
  - 2-SB-15 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - WIRE FENCE
  - CHAIN LINK FENCE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - RETAINING WALL
  - ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 19** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**


**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 7- TO 8-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-26**


SYR-85-NES KLS DMW L: ON=\* OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122042.DWG SAVED:12/11/2006 11:28 AM LAYOUT: Layout1 PAGESETUP: PENTABLE: PLTFULL.CTB PRINTED:12/11/2006 1:49 PM BY:DWODARCZYK

PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

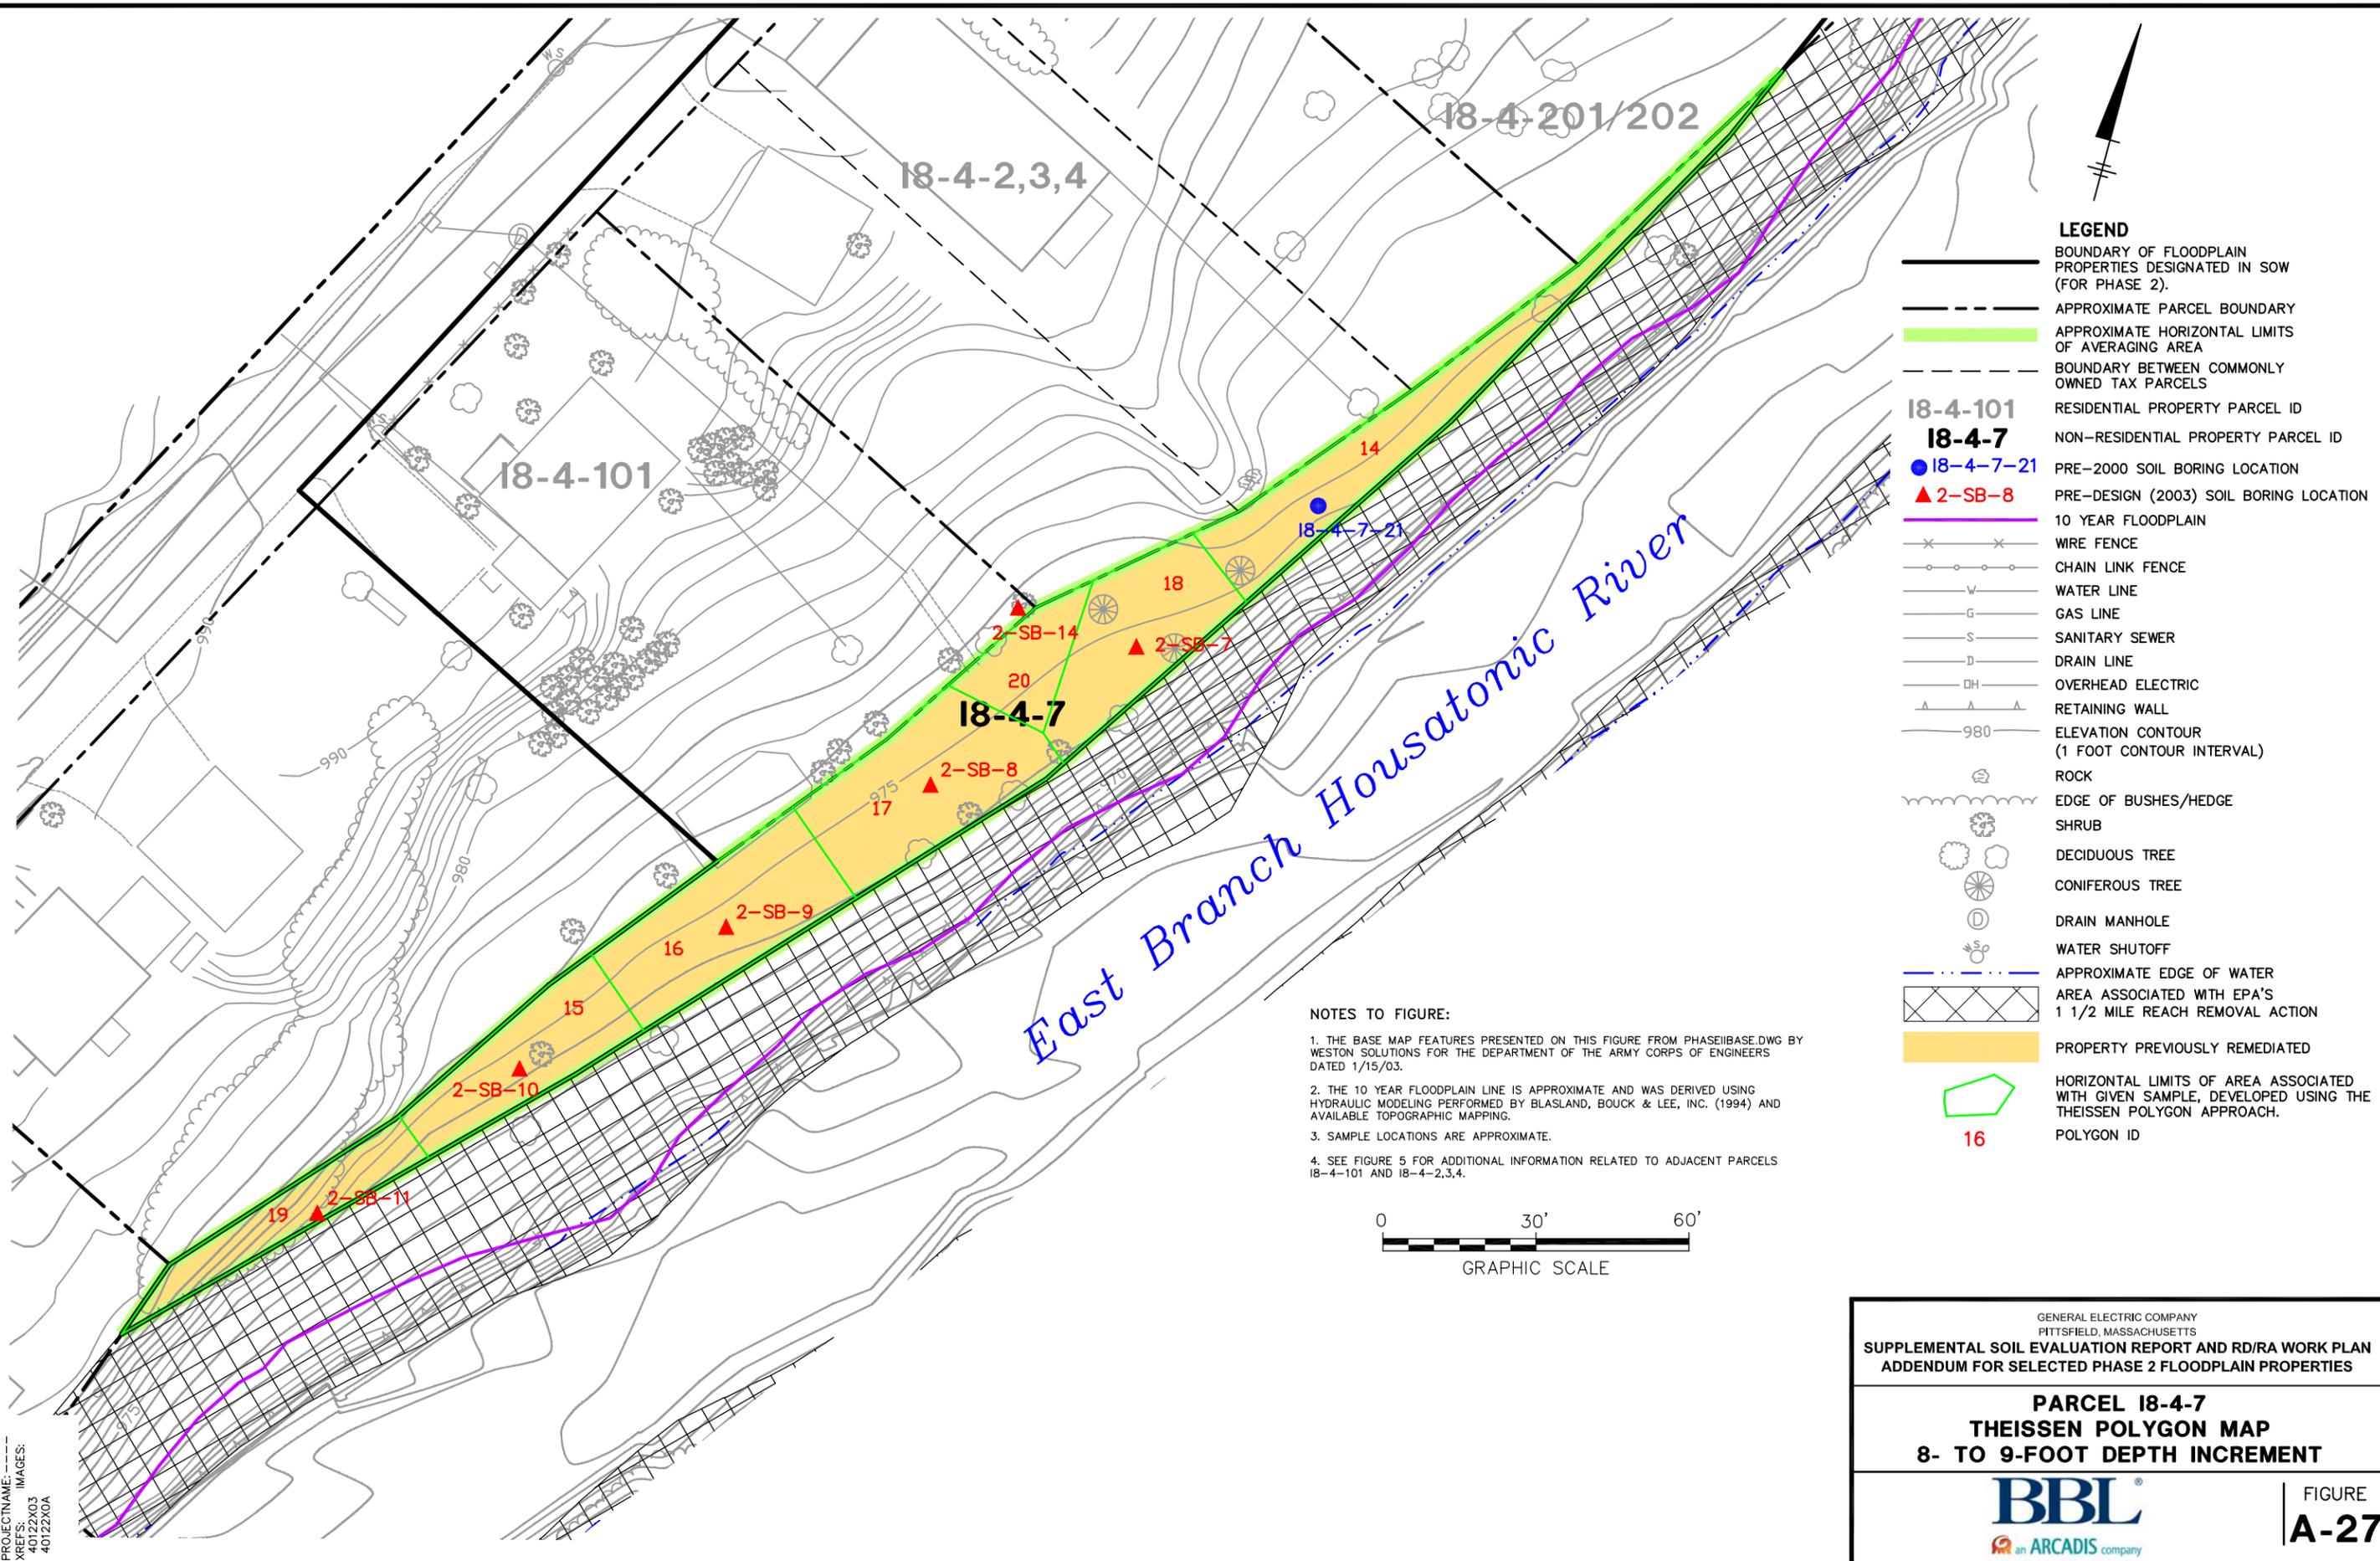

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - - - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101 RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7-21 PRE-2000 SOIL BORING LOCATION
  - ▲ 2-SB-8 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - × × × WIRE FENCE
  - ○ ○ CHAIN LINK FENCE
  - W WATER LINE
  - G GAS LINE
  - S SANITARY SEWER
  - D DRAIN LINE
  - OH OVERHEAD ELECTRIC
  - ▲▲▲ RETAINING WALL
  - 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ⊗ ROCK
  - ⋈ EDGE OF BUSHES/HEDGE
  - ⊗ SHRUB
  - ⊗ DECIDUOUS TREE
  - ⊗ CONIFEROUS TREE
  - ⊗ DRAIN MANHOLE
  - ⊗ WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - ▨ AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - ⬡ 16 HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH. POLYGON ID

GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS


**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 8- TO 9-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-27**


SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122043.DWG SAVED:12/11/2006 11:31 AM LAYOUT:LOYOU1 PAGESETUP:----- PENTABLE:PLTFULLCTB PRINTED:12/11/2006 1:50 PM BY:DWODARCZYK  
 PROJECTNAME:-----  
 XREFS: IMAGES:  
 40122X03  
 40122X0A

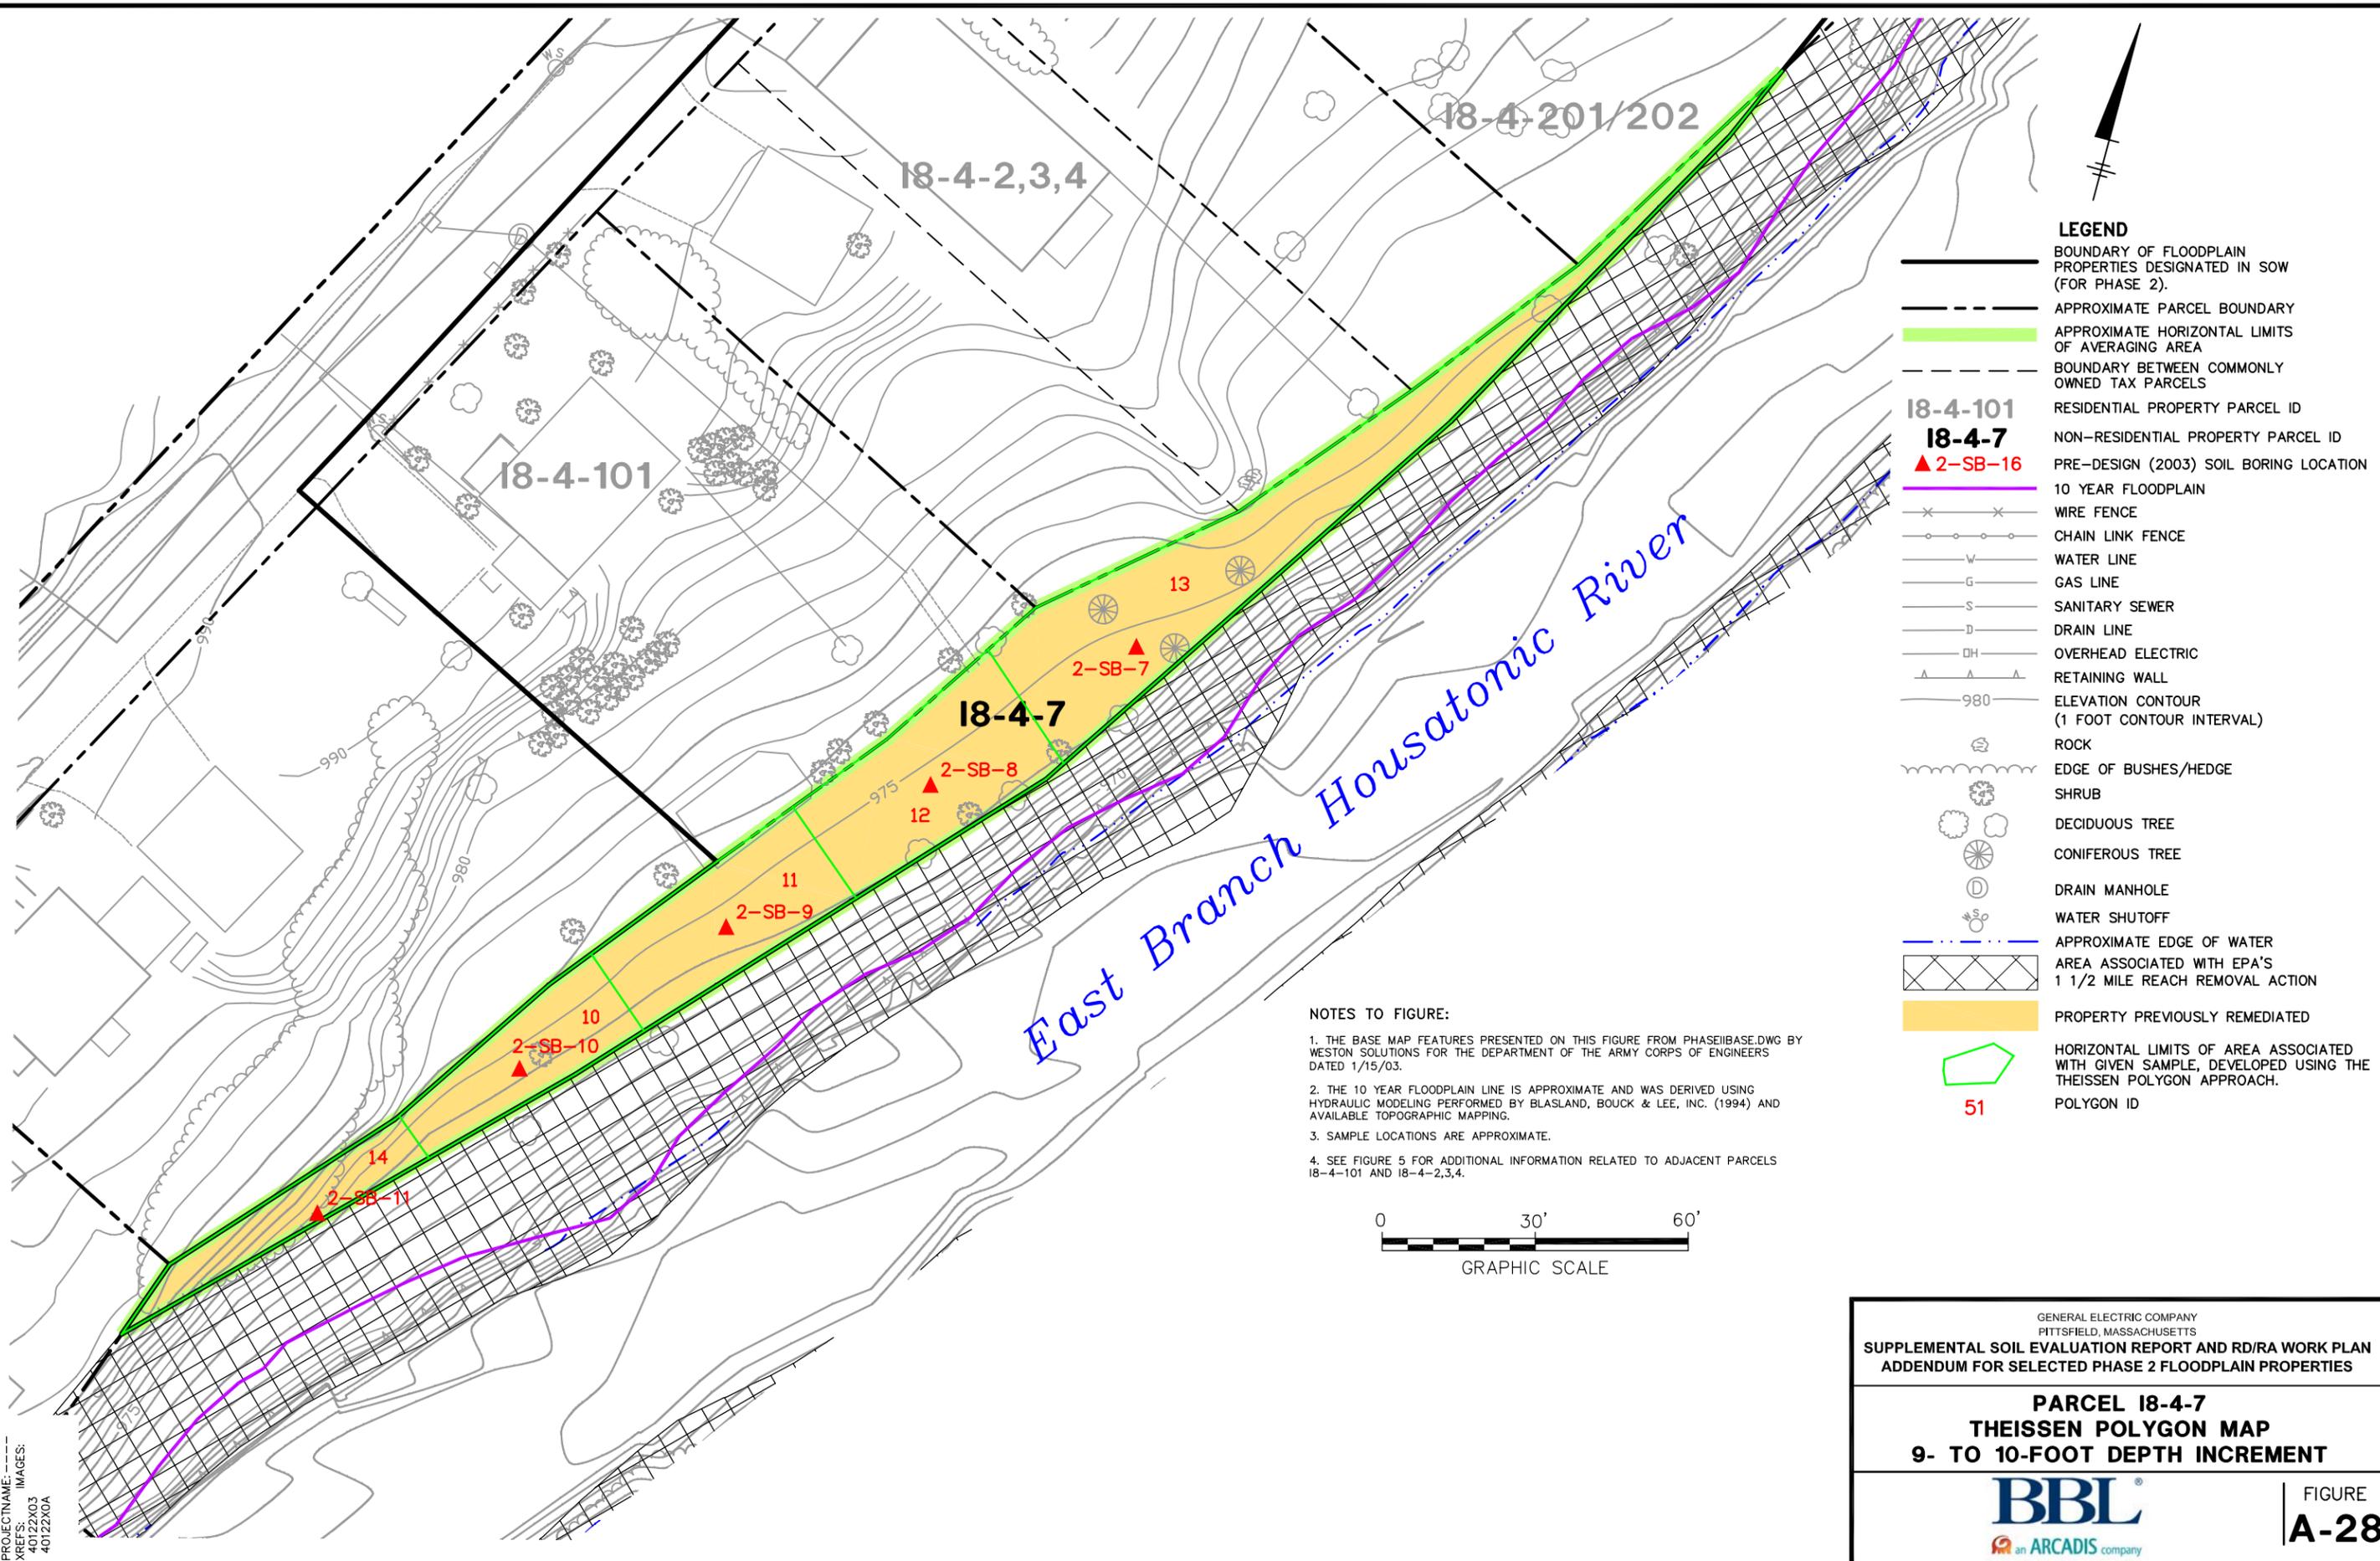

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - 2-SB-16** PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - WIRE FENCE
  - CHAIN LINK FENCE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - RETAINING WALL
  - ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 51** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 9- TO 10-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-28**


SYR-85-NES KLS DMW L: ON=\*, OFF=\*REF\*  
 G:\GE\_ACTIVE\N\40122004 PHASE2 ADDENDUM\40122044.DWG SAVED:12/11/2006 11:31 AM LAYOUT:LOYOU11 PAGESETUP:----- PENTABLE:PLTFULLCTB PRINTED:12/11/2006 1:51 PM BY:DWODARCZYK  
 PROJECTNAME:-----  
 XREFS: IMAGES:  
 40122X03  
 40122X0A

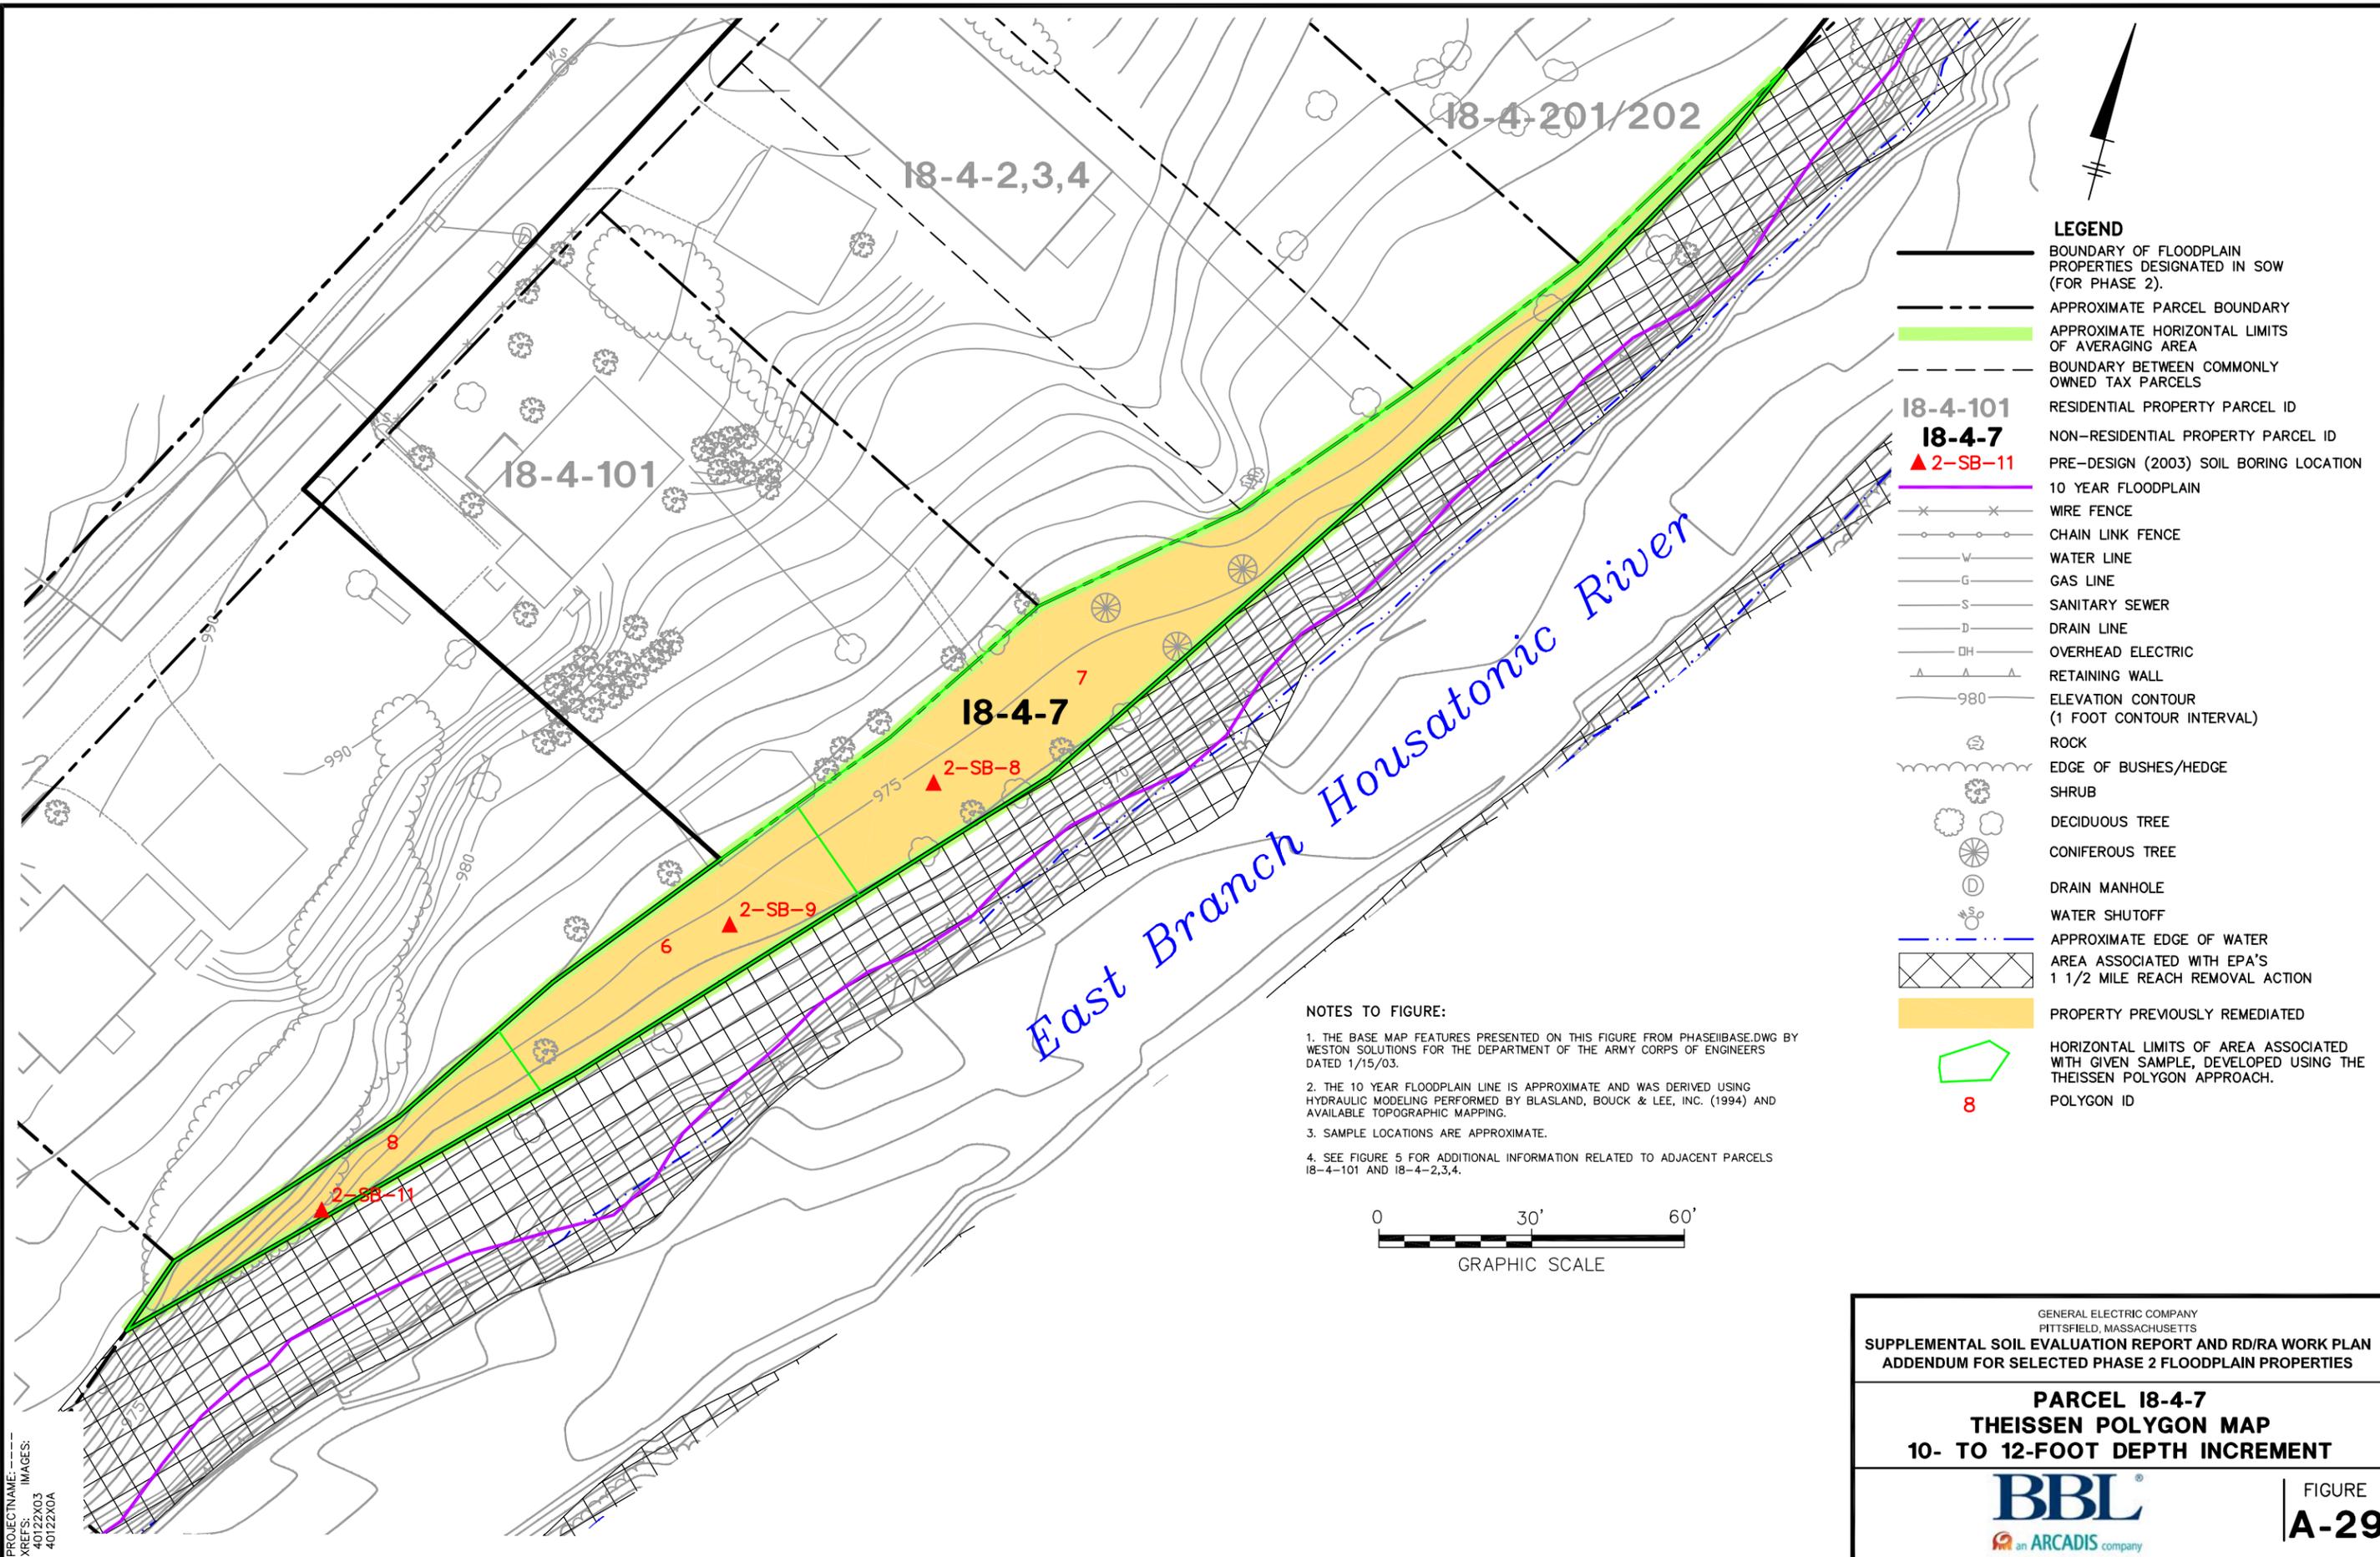

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - - - - - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - - - - - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101 RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7 NON-RESIDENTIAL PROPERTY PARCEL ID
  - ▲ 2-SB-11 PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - × × WIRE FENCE
  - ○ CHAIN LINK FENCE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - △ RETAINING WALL
  - 980 ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 8 POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.




GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 10- TO 12-FOOT DEPTH INCREMENT**

FIGURE  
**A-29**

SYR-85-NES KLS DMW L: ON=\* OFF=\*REF\*  
 G:\GE\_ACTIVE\N\40122004 PHASE2 ADDENDUM\40122045.DWG SAVED:12/11/2006 11:34 AM LAYOUT: layout1 PAGESETUP: PENTABLE: PLTFULL.CTB PRINTED: 12/11/2006 1:52 PM BY: DWODARCZYK


PROJECTNAME: 40122X03  
 XREFS: IMAGES: 40122X0A

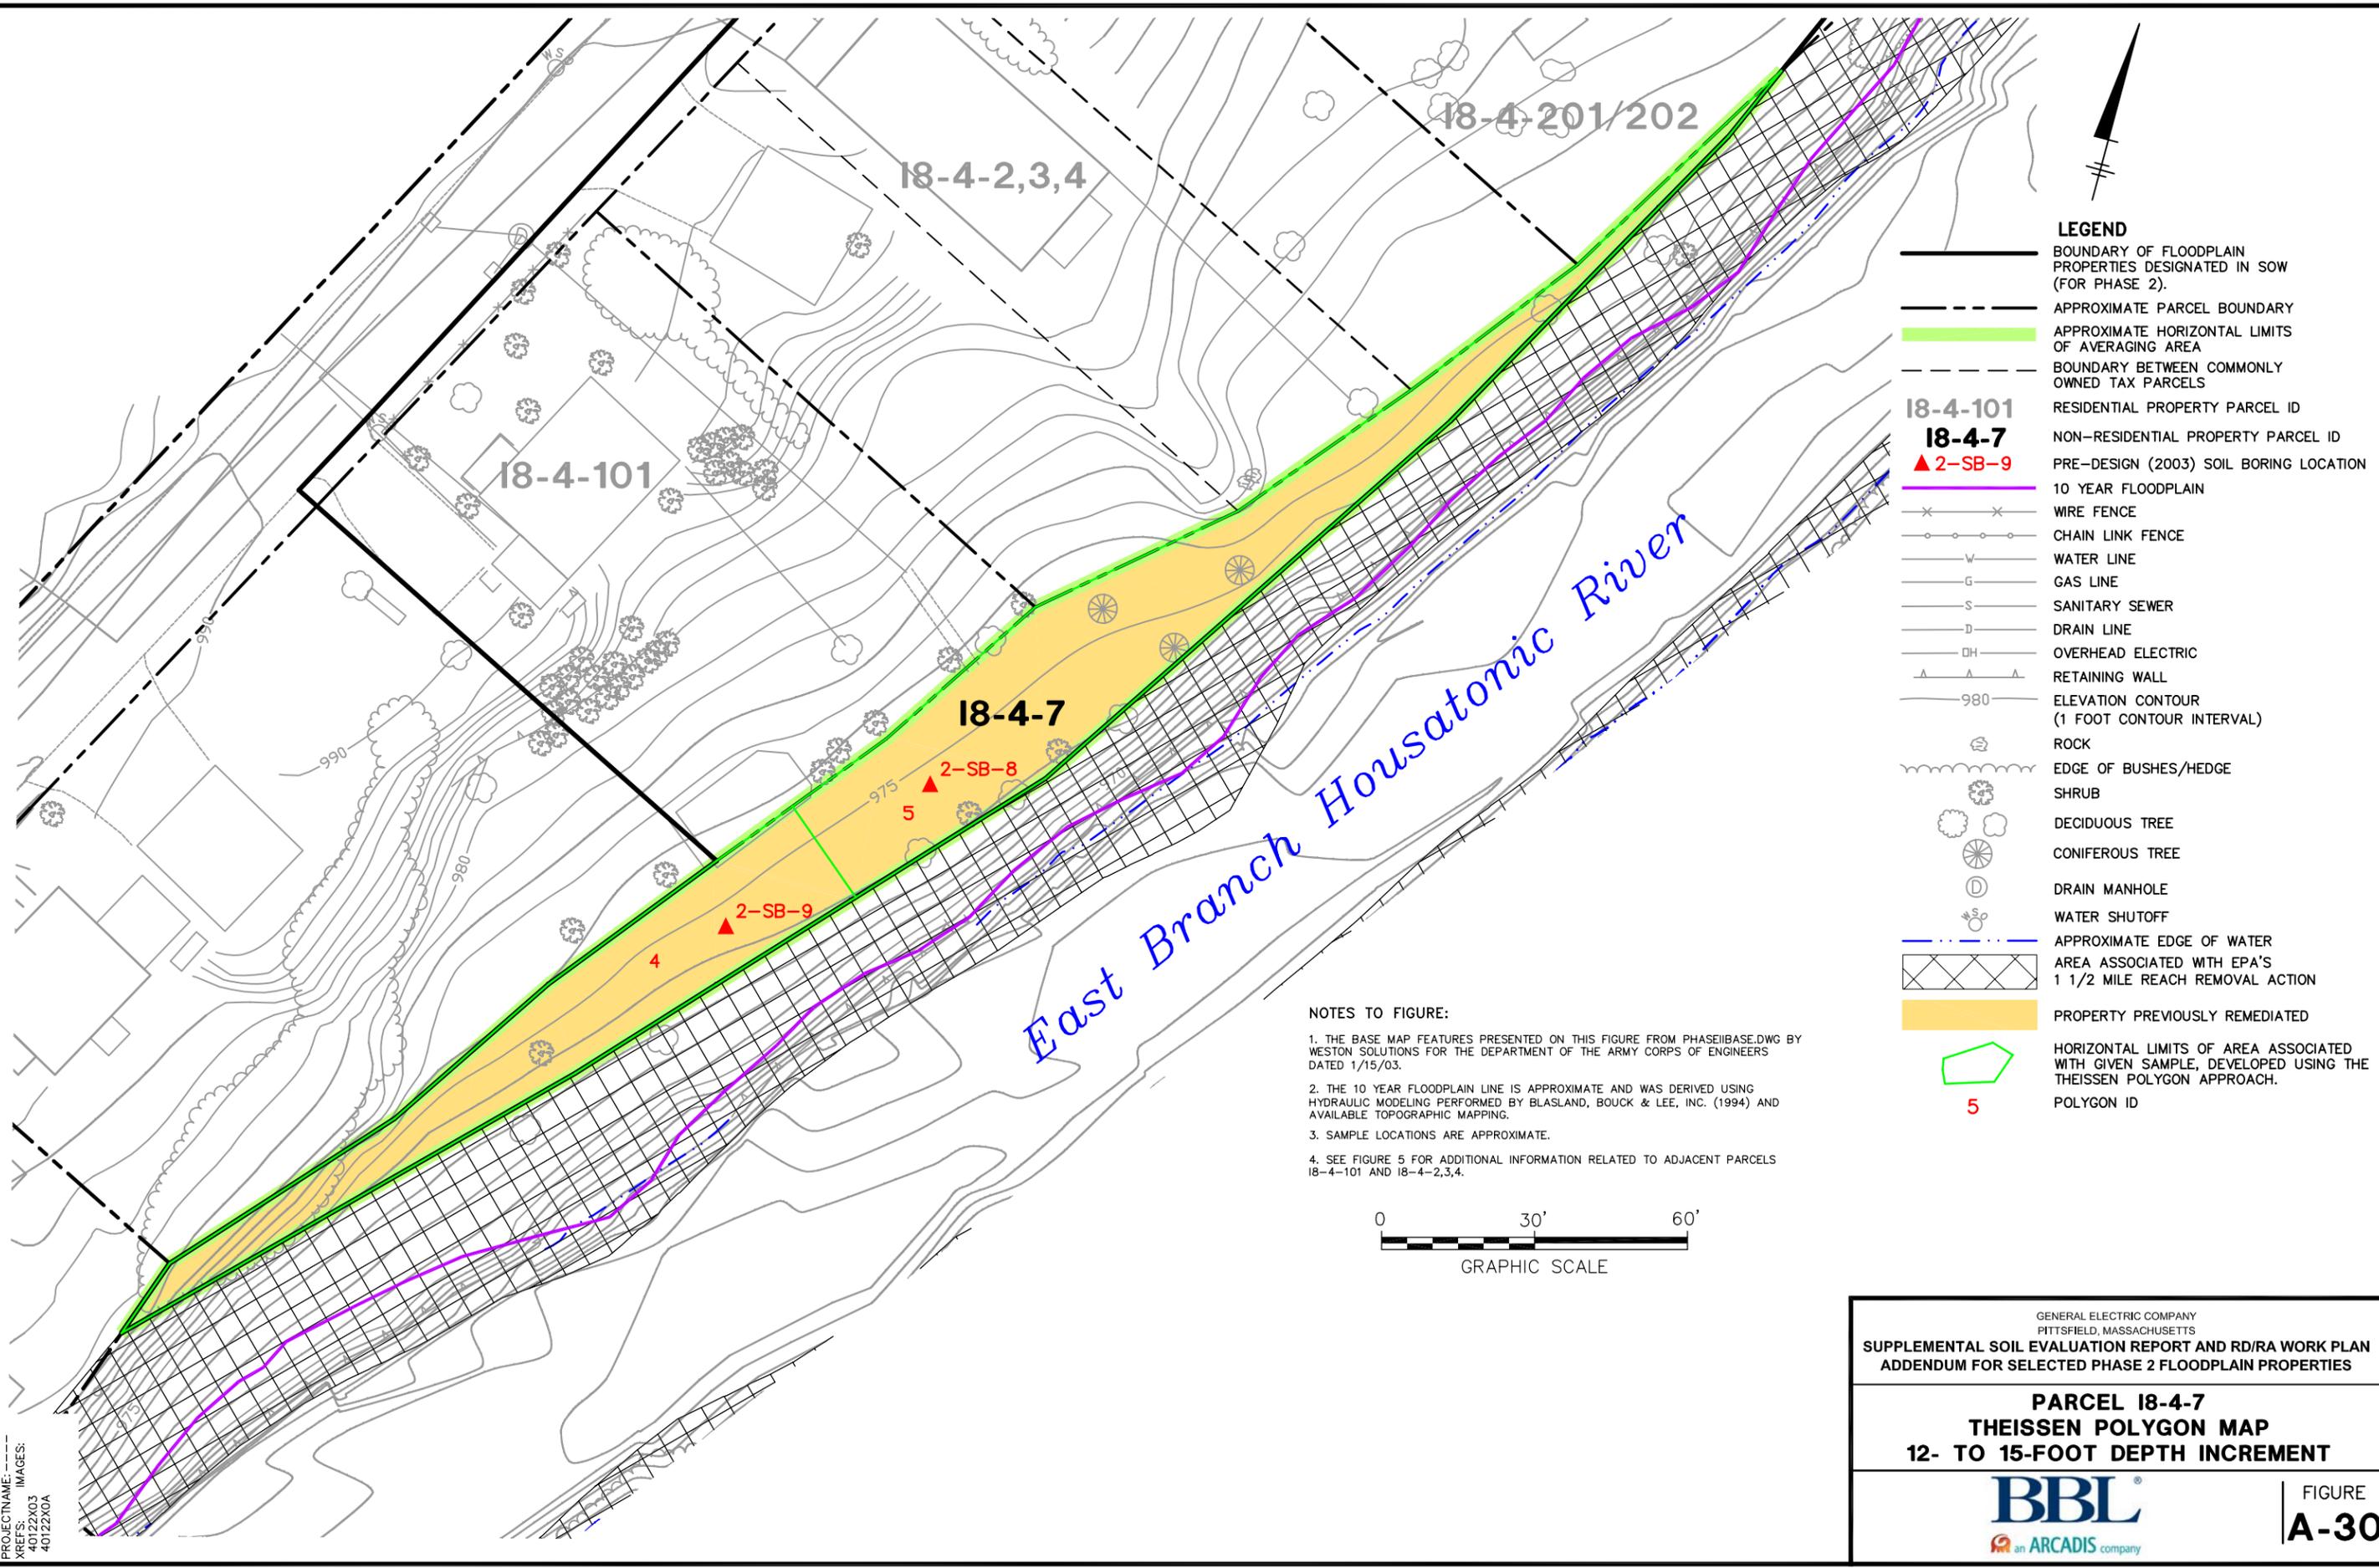

- LEGEND**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
  - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-101** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - 2-SB-9** PRE-DESIGN (2003) SOIL BORING LOCATION
  - 10 YEAR FLOODPLAIN
  - WIRE FENCE
  - CHAIN LINK FENCE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - RETAINING WALL
  - ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
  - ROCK
  - EDGE OF BUSHES/HEDGE
  - SHRUB
  - DECIDUOUS TREE
  - CONIFEROUS TREE
  - DRAIN MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
  - PROPERTY PREVIOUSLY REMEDIATED
  - HORIZONTAL LIMITS OF AREA ASSOCIATED WITH GIVEN SAMPLE, DEVELOPED USING THE THEISSEN POLYGON APPROACH.
  - 5** POLYGON ID

**NOTES TO FIGURE:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.
3. SAMPLE LOCATIONS ARE APPROXIMATE.
4. SEE FIGURE 5 FOR ADDITIONAL INFORMATION RELATED TO ADJACENT PARCELS 18-4-101 AND 18-4-2,3,4.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS

**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PARCEL 18-4-7  
 THEISSEN POLYGON MAP  
 12- TO 15-FOOT DEPTH INCREMENT**

**BBL**  
 an ARCADIS company

FIGURE  
**A-30**

# *Appendix B*


---

## **Technical Drawings**

# TECHNICAL DRAWINGS

## PHASE 2

# FLOODPLAIN PROPERTIES REMOVAL ACTION AREA (RAA)

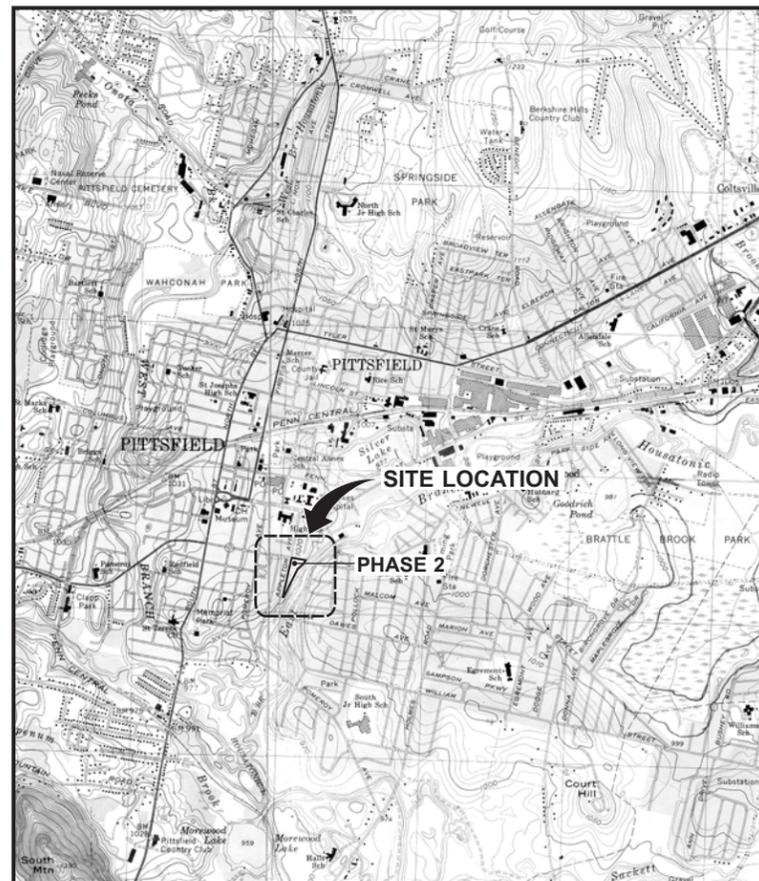

DECEMBER 2006



*General Electric Company  
Pittsfield, Massachusetts*

### INDEX TO DRAWINGS

#### COVER SHEET

1. EXISTING SITE PLAN
2. SITE PREPARATION PLAN
3. EXCAVATION LIMITS
4. SITE RESTORATION PLAN
5. GENERAL NOTES AND DETAILS



12/11/06 SYR-85-KLS  
N:\40122004\40122C01.CDR

2000' 0 2000'  
APPROX. SCALE: 1 = 2000 FEET

**LOCATION MAP**




SR-95-DWG LAYER: ON=4 OFF=REF\*  
 G:\ACTIVE\N\40122004 PHASE2\ADDENDUM\CONTRACT\40122001.DWG SAVED: 12/11/2006 11:39 AM LAYOUT: Layout1 PAGESETUP: PENTABLE: P1cont.ctb PRINTED: 12/11/2006 1:56 PM BY: DWODARCZYK  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES:



LEGEND	
	BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
	APPROXIMATE PARCEL BOUNDARY
	BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
<b>18-4-2,3,4</b>	RESIDENTIAL PROPERTY PARCEL ID
<b>18-4-7</b>	NON-RESIDENTIAL PROPERTY PARCEL ID
	10 YEAR FLOODPLAIN
	WIRE FENCE
	CHAIN LINK FENCE
	WATER LINE
	GAS LINE
	SANITARY SEWER
	DRAIN LINE
	OVERHEAD ELECTRIC
	RETAINING WALL
	ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
	ROCK
	EDGE OF BUSHES/HEDGE
	SHRUB
	DECIDUOUS TREE
	CONIFEROUS TREE
	DRAIN MANHOLE
	SANITARY MANHOLE
	WATER SHUTOFF
	APPROXIMATE EDGE OF WATER
	AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION

**NOTES:**

1. THE BASE MAP FEATURES PRESENTED ON THIS FIGURE FROM PHASEIIBASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
2. UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY AND ALL UTILITIES MAY NOT BE SHOWN.
3. THE PARCELS SHOWN HEREON MAY BE SUBJECT TO RIGHTS AND EASEMENTS AS CONTAINED IN THE VARIOUS DEEDS OF RECORD DESCRIBING SAID PREMISES. ALL RIGHTS AND EASEMENTS MAY NOT BE DEPICTED HEREON.
4. CONTRACTOR TO COORDINATE WITH "DIGSAFE" FOR LOCATIONS/IDENTIFYING UTILITIES. NO SITEWORK WILL BE PERFORMED BY THE CONTRACTOR UNTIL UTILITY INVESTIGATION BY "DIGSAFE" HAS BEEN CONDUCTED.
5. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.



THIS DRAWING WAS PREPARED AT THE SCALE(S) INDICATED. INACCURACIES IN THE STATED SCALE(S) MAY BE INTRODUCED WHEN DRAWINGS ARE REPRODUCED. USE THE GRAPHIC SCALE BAR(S) TO DETERMINE THE ACTUAL SCALE(S) OF THIS DRAWING.

No.	Date	Revisions	Init

Professional Engineer's Name		
Prof. Engineer's No.	State	
Project Manager	Designed by	Drawn by
ACC		DMW



GENERAL ELECTRIC COMPANY \* PITTSFIELD, MASSACHUSETTS  
 SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN ADDENDUM  
 FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES  
**EXISTING SITE PLAN**  
 TECHNICAL DRAWINGS

BBL Project Number 401.22.004
Date DECEMBER 2006
Blasland, Bouck & Lee, Inc. an Arcadis company 6723 Towpath Road Syracuse, NY 13214 315-446-9120


SR-95-DWG LAYER: ON=4 OFF=REF- PENTABLE:Pltcont.ctb PRINTED:12/12/2006 10:43 AM BY:DWODARCZYK  
 G:\ACTIVE\N\40122004\PHASE2\ADDENDUM\CONTRACT\40122002.DWG SAVED:12/12/2006 10:19 AM LAYOUT:Layout1 PAGES:1/1 PAGES:1/1  
 PROJECTNAME: 40122X03  
 XREFS: IMAGES:



**LEGEND**

- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2).
- APPROXIMATE PARCEL BOUNDARY
- BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
- 18-4-2,3,4** RESIDENTIAL PROPERTY PARCEL ID
- 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
- 10 YEAR FLOODPLAIN
- WIRE FENCE
- CHAIN LINK FENCE
- WATER LINE
- GAS LINE
- SANITARY SEWER
- DRAIN LINE
- OVERHEAD ELECTRIC
- RETAINING WALL
- ELEVATION CONTOUR (1 FOOT CONTOUR INTERVAL)
- ROCK
- EDGE OF BUSHES/HEDGE
- SHRUB
- DECIDUOUS TREE
- CONIFEROUS TREE
- DRAIN MANHOLE
- SANITARY MANHOLE
- WATER SHUTOFF
- APPROXIMATE EDGE OF WATER
- AREA ASSOCIATED WITH EPA'S 1 1/2 MILE REACH REMOVAL ACTION
- HAY BALE/SILT FENCE 1  
5
- LIMITS OF SOIL REMOVAL

- NOTES:**
1. REFER TO DRAWING 1 FOR ADDITIONAL BASEMAP INFORMATION AND CONTRACTOR REQUIREMENTS.
  2. EXISTING FEATURES WITHIN LIMITS OF SOIL REMOVAL THAT ARE REMOVED SHALL BE DISPOSED OF AT AN APPROPRIATE OFF-SITE FACILITY BY CONTRACTOR. CERTAIN EXISTING FEATURES SHALL BE RECONSTRUCTED BY CONTRACTOR IN ACCORDANCE WITH DRAWING 4.
  3. AS NEEDED, CONTRACTOR SHALL PERFORM CLEARING AND GRUBBING ACTIVITIES IN AREAS SUBJECT TO RESPONSE ACTIONS (I.E., EXCAVATION AREAS).
  4. AS PART OF SITE PREPARATION ACTIVITIES, THE CONTRACTOR SHALL INVENTORY ALL EXISTING TREES AND SHRUBS (I.E. TYPE, QUANTITY, SIZE, ETC.) LOCATED WITHIN THE LIMITS OF, OR WOULD BE AFFECTED BY, REMEDIATION ACTIVITIES. THIS INVENTORY SHALL BE SUBMITTED TO GE OR GE'S REPRESENTATIVE PRIOR TO INITIATION OF SITE CLEARING ACTIVITIES.
  5. MATERIALS AND DEBRIS REMOVED DURING THE IMPLEMENTATION OF RESPONSE ACTIONS WILL BE DISPOSED OF AT AN APPROPRIATE OFF-SITE FACILITY BY CONTRACTOR.

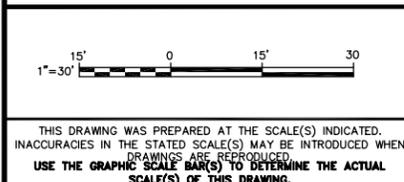

No.	Date	Revisions	Init

Professional Engineer's Name		
Prof. Engineer's No.	State	
Project Manager	Designed by	Drawn by
ACC		DMW



GENERAL ELECTRIC COMPANY \* PITTSFIELD, MASSACHUSETTS  
 SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN ADDENDUM  
 FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES  
**SITE PREPARATION PLAN**  
 TECHNICAL DRAWINGS

BBL Project Number 401.22.004
Date DECEMBER 2006
Blasland, Bouck & Lee, Inc. an Arcadis company 6723 Towpath Road Syracuse, NY 13214 315-446-9120







# *Appendix C*

---

## **Technical Specifications**

MATERIALS AND PERFORMANCE - SECTION 02200

EARTHWORK

PART 1 - GENERAL

1.01 DESCRIPTION

- A. All labor, materials, services, and equipment necessary to complete the earthwork activities as depicted on the Technical Drawings and/or as directed by GE or GE's Representative.
- B. Earthwork is defined to include, but is not limited to, clearing, rough grading, excavation, trenching, handling and disposal of surplus materials, maintenance of excavations, removal of water, backfilling operations, embankments and fills, and compaction.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Section MP-02207 – Restoration of Surfaces
- B. Section MP-02212 – Topsoil, Seeding, and Mulch
- C. RD/RA Work Plan, Section 3.3 – Soil Removal Activities
- D. RD/RA Work Plan, Section 3.4 – Backfilling Excavations
- E. RD/RA Work Plan, Section 5.4.5 – Erosion and Sedimentation Control Measures
- F. RD/RA Work Plan, Section 5.5.1 – Soil Removal and Material Handling
- G. RD/RA Work Plan, Section 5.5.3 – Backfilling of Excavations
- H. RD/RA Work Plan, Section 5.6 – Perimeter Air Monitoring

1.03 APPLICABLE CODES, STANDARDS AND SPECIFICATIONS

- A. American Society for Testing and Materials (ASTM).

1.04 SUBMITTALS

None.

PART 2 - PRODUCTS

See following sections.

### PART 3 - EXECUTION

#### 3.01 UNAUTHORIZED EXCAVATION

- A. The Contractor shall not be entitled to any compensation for excavations carried beyond or below the lines and subgrades prescribed on the Technical Drawings. The Contractor shall refill such unauthorized excavations at its own expense and in conformance with the provisions of this section.
- B. Should the Contractor, through negligence or for reasons of its own, carry its excavation below the designated subgrade, appropriate materials specified in Section MP-02212 – Topsoil, Seeding, and Mulch shall be furnished and placed as backfill in sufficient quantities to reestablish existing grades. Fill material used for backfilling shall be spread in conformance with the requirements of later subsections of this section.
- C. All material that slides, falls, or caves into the established limits of excavations due to any cause whatsoever, shall be removed and disposed of at the Contractor's expense and no extra compensation will be paid to the Contractor for any materials ordered for refilling the void areas left by the slide, fall, or cave-in.

#### 3.02 BACKFILL MATERIALS

- A. Topsoil shall be used as specified for backfill. Requirements for off-site topsoil are specified in Section MP-02212 - Topsoil, Seeding, and Mulch.
- B. Existing on-site material, designated as “native fill” or “existing soil” material shall not be used as backfill.

#### 3.03 GENERAL BACKFILLING REQUIREMENTS

- A. Backfill shall be started at the lowest section of the area to be backfilled.
- B. Drainage of the areas being backfilled shall be maintained at all times.
- C. Areas to be backfilled shall be inspected and approved by GE or GE's Representative prior to backfilling operations. All unsuitable materials and debris shall be removed.
- D. Backfill material shall not be placed when moisture content is too high to allow proper compaction.
- E. When material is too dry for adequate compaction, water shall be added to the extent necessary.
- F. Backfill material shall not be placed on frozen ground nor shall the material itself be frozen or contain frozen soil fragments when placed.
- G. No calcium chloride or other chemicals shall be added to prevent freezing.
- H. Material incorporated in the backfilling operation that is not in satisfactory condition shall be subject to rejection and removal at the Contractor's expense.

### 3.04 GRADING

- A. After the completion of all backfill operations, the Contractor shall grade the site to match the pre-excavation lines, grades, and elevations shown on the Technical Drawings, unless otherwise directed by GE, taking into account any subsequent site restoration requirements.

### 3.05 EXISTING FACILITIES

#### A. General

1. Existing subsurface facilities may be encountered during construction of the work, or located in close proximity to the work.
2. These facilities may include, but are not necessarily limited to, sewers, drains, water mains, conduits and their appurtenances. These facilities may or may not be shown on the Technical Drawings. However, the sizes, locations, and heights or depths, if indicated, are only approximate and the Contractor shall conduct its operations with caution and satisfy itself as to the accuracy of the information given. The Contractor shall not claim nor shall it be entitled to receive compensation for damages sustained by reason of the inaccuracy of the information given or by reason of its failure to properly maintain and support such structures.
3. There may be other subsurface facilities, the existence and/or location of which are not known, such as individual water and gas services, electrical conduits, sanitary and storm sewer drains, etc. The Contractor shall consult with GE or GE's Representatives of such facilities and, if possible, shall determine, prior to construction, the location and depth of any such facilities that may exist in the area to be excavated.
4. If underground facilities are known to exist in an area but their location is uncertain, the Contractor shall exercise reasonable care in its excavation technique to avoid damage to them.
5. The Contractor shall notify Massachusetts DIGSAFE at least 72 hours prior to any site work.

#### B. Notification and Protection Procedures

1. Except where superseded by state or local regulations, or in the absence of any applicable regulations, the Contractor shall, at a minimum, include the following procedures in its operations:
  - a. Prior to Excavating:
    - 1) Determine correct field location of all nearby underground facilities or arrange for Representatives of the utilities to locate them.
    - 2) Notify owners of nearby underground facilities when excavation is to take place, allowing them reasonable time to institute precautionary procedures or preventive measures which they deem necessary for protection of their facilities.

- 3) In cooperation with owners of nearby facilities, provide temporary support and protection of those underground facilities that may be especially vulnerable to damage by virtue of their physical condition or location, or those that could create hazardous conditions if damaged.
- b. Immediately notify any utility owner of any damage to its underground facilities resulting from the Contractor's operations, and arrange for repairs to be made as soon as possible.
- c. In case of any emergency the Contractor shall follow the Contingency and Emergency Procedures Plan outlined in GE's Project Operations Plan.

### 3.06 OTHER REQUIREMENTS

#### A. Unfinished work

1. When, for any reason, the work is to be left unfinished, all excavations shall be filled and all roadways and watercourses left unobstructed with their surfaces in a safe and satisfactory condition.

#### B. Hauling Material on Street

1. When hauling material over the streets or pavement, the Contractor shall provide suitably tight-sealing vehicles so as to prevent deposits on the streets or pavements. In all cases where any materials are dropped from the vehicles, the Contractor shall clean up the same as often as required to keep the crosswalks, streets, and pavements clean and free from dirt, mud, stone, and other hauled material.
2. When hauling materials that contain PCBs or other hazardous constituents, the Contractor shall abide by all applicable federal, state, and local codes.

#### C. Dust Control

1. It shall be the sole responsibility of the Contractor to control the dust created by any and all of its operations to such a degree that it will not endanger the safety and welfare of the general public.

- END OF SECTION -

MATERIALS AND PERFORMANCE - SECTION 02207

RESTORATION OF SURFACES

PART 1 - GENERAL

1.01 DESCRIPTION

- A. All types of surfaces, structures and appurtenances disturbed, damaged, or destroyed during the performance of the work under or as a result of the operations of the Contract, shall be restored and maintained, as specified herein or as directed by GE or GE's Representative.
- B. The quality of materials and the performance of work used in the restoration shall produce a surface or feature equal to or better than the condition of each before the work began, as approved by GE or GE's Representative.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Section MP-02200 – Earthwork
- B. Section MP-02212 – Topsoil, Seeding, and Mulch
- C. Section MP-02600 – Bituminous Concrete Pavements
- D. RD/RA Work Plan, Section 5.5.5 – Restoration of Disturbed Vegetation

1.03 SUBMITTALS

- A. None

1.04 SCHEDULE OF RESTORATION

- A. After an accepted schedule has been agreed upon, it shall be adhered to unless otherwise revised with the approval of GE or GE's Representative.
- B. The replacement of surfaces at any time, as scheduled or as directed, shall not relieve the Contractor of responsibility to repair damages by settlement or other failures.

PART 2 - PRODUCTS

2.01 DESCRIPTION

- A. Any offsite topsoil shall be unfrozen, friable, natural loam and shall be free of clay lumps, brush needs, litter, stumps, stones, and other extraneous matter. The topsoil shall have an organic content between 5% and 20%, and a pH between 5.5 and 7.5.
- B. Topsoil shall be certified clean by the materials supplier.
- C. Topsoil shall have demonstrated by the occurrence of healthy crops, grass, or other vegetative growth, that it is reasonably well-drained and capable of supporting plant growth. Topsoil shall have less than 10 percent gravel by volume and be free of stones over ½-inch in diameter.

### PART 3 - EXECUTION

#### 3.01 LAWNS AND IMPROVED AREAS

- A. The area to receive topsoil shall be graded to a depth of not less than 12 inches or as specified, below the proposed finish surface.
- B. The furnishing and placing of topsoil, seed, and mulch shall be performed by the Contractor.
- C. Any washout or damage which occurs prior to or after restoring surface with topsoil, seed, and mulch shall be regraded and/or repaired as necessary by the Contractor.

#### 3.02 SIDEWALKS

- A. In general, all sidewalks shall be constructed or reconstructed by the Contractor in accordance with the current Mass Highway Specifications of Highways and Bridges (Mass Highway Specifications). Mass Highway Specifications shall apply to the materials to be supplied and to construction procedures, except as modified herein.
- B. It shall be the Contractor's responsibility to perform all work within the prescribed temperature, moisture, and weather limitations imposed by the Mass Highway Specifications.
- C. Where new or replacement cement concrete sidewalk is to meet an existing sidewalk, the existing sidewalk shall be removed back to the first expansion or construction joint unless specified otherwise by GE or on the Technical Drawings.
- D. Any valve boxes, curb boxes, manhole covers, etc., encountered or to be located in the sidewalk area shall be adjusted so that the cover is flush with the top surface of the sidewalk. All valve boxes, etc., shall be left in such a way that the covers are easily removed and the boxes shall function in the manner in which they were intended. All covers shall be cleaned and restored to their original condition, free from concrete and asphalt.
- E. The finished grade and alignment of sidewalk replacements to match existing conditions prior to removal.
- F. New concrete walks at street intersections shall be constructed with ramps in accordance with Mass Highway Specifications.
- G. The subgrade shall be free from all bumps, depressions, standing water, roots, organic material, and all deleterious material. The subgrade shall be graded, leveled, and compacted to a smooth surface, parallel to the final surface. This subgrade shall be at a depth 10 inches below final grade for cement concrete sidewalks and at a depth 8-inches below final grade for asphalt concrete sidewalks. Except that at driveways, the subgrade shall be at an additional 2-inches in depth.
- H. The 6-inch thick subbase material shall be installed on the finished subgrade. The subbase material shall be the same material listed for pavement subbase and shall be adequately compacted.

- I. Any sidewalk, constructed or reconstructed, which is subsequently damaged due to negligence or activity of work, or failure to protect surfaces from becoming marked by vehicular or pedestrian traffic, shall be removed and replaced by the Contractor at no additional cost to GE. For a period of one year after completion of the project, the Contractor shall promptly maintain, repair, and/or replace any sidewalk which settles, cracks, or becomes damaged due to settlement or defective materials or workmanship. If settlement of + ¼-inch or more as measured length or width of each square block has occurred, the sidewalk shall be removed and the subbase restored to proper grade before restoration of the surface course.

### 3.03 OTHER TYPES OF RESTORATION

- A. Water courses shall be reshaped to the original grade and cross-section and all debris removed. Where required to prevent erosion, the bottom and sides of the water course shall be protected.
- B. Culverts destroyed or removed as a result of the construction operations shall be replaced in like size and material and shall be replaced at the original location and grade. When there is minor damage to a culvert and with the consent of the GE, a repair may be undertaken, if satisfactory results can be obtained.
- C. Fences destroyed or removed as a result of the construction operations shall be replaced in like size and material and shall be replaced at the original location.
- D. All small structures (e.g., storage sheds, swing sets, etc.) that were relocated for the excavation activities will be returned to their original location or new locations chosen by the property owner.

- END OF SECTION -

MATERIALS AND PERFORMANCE - SECTION 02212

TOPSOIL, SEEDING, AND MULCH

PART 1 - GENERAL

1.01 DESCRIPTION

- A. Work under this section consists of furnishing and placing of topsoil, fertilizer, seed, mulch, erosion control matting, and maintenance of seeded areas until final acceptance.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Section MP-02200 – Earthwork
- B. Section MP-02207 – Restoration of Surfaces
- C. RD/RA Work Plan, Section 3.4 – Backfilling Excavations
- D. RD/RA Work Plan, Section 5.5.5 – Restoration of Disturbed Vegetation

1.03 SUBMITTALS

- A. Analysis of the seed (to demonstrate compliance with the seed mix identified in Section 2.01D of this specification) and fertilizer (to identify chemical composition), and proposed application rates (to demonstrate compliance with the fertilizer application rate identified in Section 3.01B of this specification).
- B. Should hydroseed be used, the Contractor shall submit all data including material and application rates and methods.
- C. Sample of topsoil to be tested by GE for chemical contaminants as discussed in this Work Plan, Section 5.4 – Backfilling Excavations.

PART 2 - PRODUCTS

2.01 MATERIALS

- A. Any offsite topsoil shall be unfrozen, friable, natural loam and shall be free of clay lumps, brush needs, litter, stumps, stones, and other extraneous matter. The topsoil shall have an organic content between 5% and 20%, and a pH between 5.5 and 7.5.
- B. Fertilizer shall be a standard quality commercial carrier of available plant food elements (i.e., a complete prepared and packaged material containing a minimum of 5% nitrogen, 10% phosphoric acid, and 10% potash).
  - 1. Each bag of fertilizer shall bear the manufacturer's guaranteed statement of analysis.
- C. Seed mixtures shall be of commercial stock of the current season's crop and shall be delivered in unopened containers bearing the guaranteed analysis of the mix. All seed shall meet the State standards of germination and purity.

- D. Seed mix to be used in vegetated areas shall consist of the following mixture: 65% Kentucky Blue Grass, 20% Perennial Rye Grass, and 15% Fescue. The seed mixture will be seeded at a rate of 150 pounds per acre.
- E. Mulch shall be stalks of oats, wheat, rye, or other approved crops free from noxious weeds and coarse materials.
- F. Temporary erosion control matting shall be S75 as manufactured by North American Green, or equivalent.
- G. Permanent erosion control matting shall be P300P as manufactured by North American Green, or equivalent.

### PART 3 - EXECUTION

#### 3.01 INSTALLATION

- A. The topsoil shall be applied in a single loose lift and shall have a final minimum thickness of 12 inches. No compaction is required or allowed. Following placement of topsoil and prior to fertilizer application, all stones greater than 1-inch in diameter, sticks, and other deleterious material shall be removed.
- B. The fertilizer shall be applied to the surface uniformly at the rate of 20 pounds per 1,000 square feet.
  - 1. Following the application of the fertilizer and prior to application of the seed, the topsoil shall be scarified to a depth of at least 2 inches with a disk or other suitable method traveling across the slope if possible.
    - a. After the soil surface has been fine-graded, the seed mixture shall be uniformly applied upon the prepared surface with a mechanical spreader at a rate specified by the seed manufacturer.
    - b. The seed shall be raked lightly into the surface.
    - c. Seeding and mulching shall not be done during windy weather.
    - d. Mulch (where used) shall be hand or machine spread to form a continuous blanket over the seed bed, approximately 2 inches in uniform thickness at loose measurement with a minimum of 90% surface coverage. Excessive amounts or bunching of mulch shall not be permitted.
    - e. Unless otherwise specified, mulch shall be left in place and allowed to decompose.
  - 2. Any mulch that has not disintegrated at time of first mowing shall be removed.
    - a. Seeded areas shall be watered as often as required to obtain germination and to obtain and maintain a satisfactory sod growth. Watering shall be performed in such a manner as to prevent washing out of seed and mulch.

- b. Hydroseeding may be accepted as an alternative method of applying fertilizer, seed, and mulch. The Contractor must submit all data regarding materials and application rates to GE or GE's Representative for review.
- c. Temporary and permanent erosion control matting shall be installed in accordance with manufacturer's specifications.

### 3.02 MAINTENANCE

- A. All erosion rills or gullies within the topsoil layer shall be filled with additional approved topsoil, graded smooth, and re-seeded and mulched.
- B. The Contractor shall also be responsible for repairs to all erosion of the seeded areas until all new grass is firmly established and reaches a height of not less than 4 inches. All bare or poorly vegetated areas must be re-seeded and mulched.

- END OF SECTION -

MATERIALS AND PERFORMANCE - SECTION 02600

BITUMINOUS CONCRETE PAVEMENTS

PART 1 - GENERAL

1.01 DESCRIPTION

- A. The Contractor shall be responsible for providing all labor, equipment, and materials required for replacement of bituminous concrete paving over removed driveways or other paved areas as shown on the drawings and as specified herein.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Section MP-02222 – Fill Materials

1.03 APPLICABLE CODES, STANDARDS, AND SPECIFICATIONS

- A. American Society of State Highway and Transportation Officials (AASHTO).
- B. Massachusetts Highway Department Standard Specification for Highways and Bridges (Mass Highway Specifications).

1.04 TIME OF CONSTRUCTION

- A. The Contractor shall:
  - 1. Apply prime and tack coats when ambient temperature is above 50°F, and when temperature has not been below 35°F for 12 hours immediately prior to application. The Contractor may not install paving when the base is wet or contains excess moisture.
  - 2. Construct bituminous concrete wearing surface when surface temperature is above 42°F and when the binder is dry.
  - 3. Base course may be placed when air temperature is above 32°F and rising.
  - 4. Establish and maintain required lines and elevations.

PART 2 - PRODUCTS

2.01 SUBBASE COURSE

- A. Subbase course material must be capable of achieving the gradation and compaction requirements as presented in Section MP-02222.

2.02 BASE COURSE AGGREGATE

- A. The crushed aggregate for the bituminous concrete base course shall conform to the requirements of the Mass Highway Specifications.

2.03 BITUMINOUS BINDER

- A. The binder shall be asphalt cement conforming to the requirements of AASHTO 20.

2.04 WEARING SURFACE

- A. The wearing surface shall be Type 1-2. The material shall conform to quality requirements as stated in the Mass Highway Specifications.

PART 3 - EXECUTION

3.01 SURFACE PREPARATION

- A. Remove loose matter from the compacted subbase surface immediately before applying prime coat.
- B. Proof-roll prepared subbase to check for unstable areas and areas requiring additional compaction.
- C. Notify appropriate personnel of unsatisfactory subbase conditions. Paving work may not proceed until deficient subbase areas have been corrected and are ready to receive paving.
- D. Apply tack coat to contact surfaces of previously constructed asphalt or Portland cement concrete and surfaces abutting or projecting into asphalt concrete pavement. The Contractor shall distribute tack coat at rate of 0.05 to 0.15 gallons per square yard of surface.
- E. Allow drying of all surfaces until they are of the proper condition to receive paving.

3.02 PAVING

A. General

1. Place concrete mixture on prepared surface, spread, and strike-off. Spread mixture at minimum temperature of 225°F (107°C). Place inaccessible and small areas by hand. Place each course to required grade, cross-section, and compacted thickness.

B. Pavement Placing

1. Place in strips not less than 10 inches wide, unless otherwise acceptable to GE or GE's Representative. After strip has been placed and rolled, place succeeding strips and extend rolling to overlap previous strips. Complete base course for a section before placing surface course.

C. Joints

1. Make joints between old and new pavements or between successive days' work, to ensure a continuous bond between adjoining work. Construct joints to have same texture and smoothness as other sections of bituminous concrete. Clean concrete surfaces and apply tack coat.

### 3.03 ROLLING

#### A. General

1. Begin rolling when mixture will bear roller weight without excessive displacement.
2. Compact mixture with hot tampers or vibrating plate compactors in areas inaccessible to rollers.

B. Breakdown Rolling - Accomplish breakdown rolling immediately following rolling of joints and outside edge. Check surface after breakdown rolling and repair displaced areas by loosening and filling, if required, with hot material.

C. Second Rolling - Follow breakdown rolling as soon as possible while mixture is hot. Continue rolling until mixture has been thoroughly compacted.

D. Finish Rolling - Perform finish rolling while mixture is still warm enough for removal of roller marks. Continue rolling until marks are eliminated and course has attained maximum density.

E. Patching - Remove and replace paving areas mixed with foreign materials and defective areas. Cut out such areas and fill with fresh, hot bituminous concrete. Compact by rolling mixture to maximum surface density and smoothness.

F. Protection - After final rolling, do not permit vehicular traffic on pavement until it has cooled and hardened.

G. Erect barricades to protect paving from traffic until mixture has cooled enough not to become marked.

- END OF SECTION -

*Appendix D*

---

**Contractor Submittal Tracking Form**

APPENDIX D  
GENERAL ELECTRIC COMPANY  
PITTSFIELD, MASSACHUSETTS

SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES

CONTRACTOR SUBMITTAL TRACKING FORM

Item No.	Submittal Description	Specification Reference (see Note 2)	Date Received	Review Conducted by:		Interim Status/Date (see Note 1)	Final Status/Date (see Note 1)	Notes
				GE Project Manager	Design Engineer			
1	Operations Plan - The Plan shall address, but not be limited to, the following items:	Section 5.3						
	• List of equipment to be used onsite	Section 5.3						
	• Residential property protection procedures	Section 5.3						
	• Work Schedule	Section 5.3						
	• The Contractor's proposed plan for controlling vehicular and pedestrian traffic during the performance of construction activities	Section 5.3						
	• The Contractor's qualifications package (if requested by GE)	Section 5.3						
	• Stormwater (including run-on and run-off), erosion, noise, and dust control measures	Section 5.3						
	• The Contractor's proposed excavation approach	Section 5.3						
	• Materials handling and staging approach	Section 5.3						
• Equipment cleaning procedures	Section 5.3							
2	Health and Safety Plan - The Plan shall address, but not be limited to the following items (Refer to Note 3):	Section 5.3						
	• Identification of Key Personnel (including the Contractor's Health and Safety Officer)	Section 5.3						
	• Training	Section 5.3						
	• Medical Surveillance	Section 5.3						
	• Site Hazards	Section 5.3						
	• Work Zones	Section 5.3						
	• Personal Safety Equipment and Protective Clothing	Section 5.3						
	• Personal Air Monitoring	Section 5.3						
	• Personnel/Equipment Cleaning	Section 5.3						
	• Confined Space Entry	Section 5.3						
	• Material Safety Data Sheets	Section 5.3						
	• Construction Safety Procedures	Section 5.3						
	• Standard Operating Procedures and Safety Programs	Section 5.3						
	3	Contingency Plan - The Plan shall address, but not be limited to, the following items:	Section 5.3					
• Spill prevention control and countermeasures plan for all materials brought on the work site		Section 5.3						
• Emergency vehicular access/egress		Section 5.3						
• Evacuation procedures of personnel from the work sites		Section 5.3						
• For work sites that include or are adjacent to a surface water drainage way, a flood control contingency plan identifying measures to protect the work site(s) and the waterway from impact in the event of a high water and/or flood conditions		Section 5.3						
• List of all contact personnel with phone numbers and procedures for notifying each		Section 5.3						
• Routes to local hospitals		Section 5.3						
• Identification of responsible personnel who will be in a position at all times to receive incoming phone calls and to dispatch Contractor personnel and equipment in the event of an emergency situation	Section 5.3							
4	Identification of topsoil source and location and analytical data for sample(s) collected from source (unless the source has already been approved based on previously submitted analytical data).	Section 3.4/5.3						
5	Record Drawings to document any deviations from the work specified in the herein. Deviations shall be noted on the Record Drawings as soon as possible following their identification by the Contractor, GE, or GE's Representative.	Section 6.2						

APPENDIX D  
GENERAL ELECTRIC COMPANY  
PITTSFIELD, MASSACHUSETTS

SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES

**CONTRACTOR SUBMITTAL TRACKING FORM**

Item No.	Submittal Description	Specification Reference (see Note 2)	Date Received	Review Conducted by:		Interim Status/Date (see Note 1)	Final Status/Date (see Note 1)	Notes
				GE Project Manager	Design Engineer			
6	Daily Construction Reports prepared by GE's Representative will include documentation of problems and/or deficiencies noted during construction (e.g., when construction material or activity is observed or tested that does not meet the specified requirements), and corrective action employed to address the problems or deficiencies. The documentation reports will be cross-referenced to the reports, data sheets, forms, and check lists that contain data or observations leading to the determination of a problem or deficiency.	--						
7	Topsoil, Seeding, and Mulch - Analysis of the seed and fertilizer, and proposed application rates.	Materials and Performance Section 02212 (1.03)(A)						
8	Topsoil, Seeding, and Mulch - Should hydroseed be used, the Contractor shall submit all data including material and application rates.	Materials and Performance - Section 02212 (1.03)(B)						
9	Topsoil, Seeding, and Mulch - Sample of topsoil to be tested by GE for chemical contaminants as discussed in this Work Plan.	Materials and Performance Section 02212 (1.03)(C)						

**Notes:**

1. Submittal status nomenclature is as follows:

- R - Reviewed
- N - Reviewed and noted
- S - Resubmit
- J - Rejected

2. All Section, Specification, and Drawing references are to the *Addendum to Pre-Design Investigation/Soil Evaluation Report and Conceptual RD/RA Work Plan for the Phase 2 Floodplain Properties* (BBL, November 2006).

3. The Health and Safety Plan is required for GE record-keeping purposes only and therefore GE will conduct a review of the plan for completeness only. Determination of the appropriate level of worker safety, equipment, and procedures based on site conditions must be made by the Contractor based on site visits, review of available information, and anticipated site activities.

4. Shaded item numbers indicate submittals required by GE but not subject to submittal to EPA.

# *Appendix E*

---

## **Ambient Air Monitoring Program**

**SCOPE OF WORK**

**for**

**Ambient Air PCB & Particulate Monitoring  
at Selected Phase 2 Floodplain Properties**

**General Electric Company  
Pittsfield, Massachusetts**

Prepared by

**Berkshire Environmental Consultants, Inc.**  
1450 East Street  
Pittsfield, MA 01201

November 2006

## TABLE OF CONTENTS

---

- 1.0 Introduction
- 2.0 Sampling Objective
- 3.0 Site Activity
- 4.0 PCB Monitoring Program
  - 4.1 High Volume PCB Sampling
  - 4.2 Analytical Procedures
- 5.0 Particulate Monitoring
- 6.0 Quality Assurance and Quality Control Procedures
- 7.0 PCB Sample Documentation, Handling and Shipment
- 8.0 Meteorological Monitoring
- 9.0 Documentation and Reporting
- 10.0 Action Levels
  - 10.1 PCBs
  - 10.2 Particulate Matter

## **1.0 INTRODUCTION**

This Scope of Work (SOW) describes ambient air monitoring for polychlorinated biphenyls (PCBs) and particulate matter which will be conducted during soil remediation actions at certain Phase 2 Floodplain Properties adjacent to the 1½ Mile Reach of the Housatonic River in Pittsfield, Massachusetts. Remediation activity will be taking place at Parcels 18-4-2, 3, 4 and Parcel 18-4-201/202. These properties are located east of Deming Street along the west bank of the East Branch of the Housatonic River.

## **2.0 SAMPLING OBJECTIVE**

The objectives of this sampling program are two-fold:

1. To obtain valid and representative data on ambient levels of PCBs around the remedial site before and during remedial activities to insure that the activities are not causing an unacceptable increase in ambient air concentrations of PCB.
2. To obtain valid and representative data on ambient levels of particulate around the remedial site before and during soil remediation activities to insure that the remedial activities are not causing an unacceptable increase in ambient air concentrations of particulate.

## **3.0 SITE ACTIVITY**

As described in the Phase 2 RD/RA Work Plan Addendum, the on-site activities to be performed at the Phase 2 Floodplain Properties include the performance of soil removal/replacement at the properties discussed above. It is anticipated that the remediation activities described in the Phase 2 RD/RA Work Plan Addendum will be performed in one continuous phase of work, which is expected to last approximately 1-2 weeks. Performance of the remediation work presented in the Phase 2 RD/RA Work Plan Addendum is subject to review and approval by the United States Environmental Protection Agency (EPA).

This ambient air monitoring program includes particulate and PCB monitoring during soil remediation activities.

## 4.0 PCB MONITORING PROGRAM

### 4.1 High Volume PCB Sampling

The high volume PCB sampling program will include the following elements:

High-Volume Monitoring Locations	2
Background Sites	1
Co-Located Sites (Field Duplicates)	1
Sampling Time	24 hours per sampling event
Sampling Period	Duration of soil remediation activity
Frequency of Sampling	Once prior to the onset of soil remediation activity and once during remediation activity <sup>1</sup>
No. of Blanks Per Sampling Event	1
Sampling Method	EPA Compendium Method TO-4A
Analytical Method	GC/ECD or GC/MS as described in EPA Method TO-4A

<sup>1</sup> Sampling frequency may be increased if either PCB or particulate monitoring levels exceed threshold values.

Ambient air monitoring for PCBs will be conducted during soil remediation activities. Sampling will be conducted for one 24-hour period prior to the initiation of remediation and one 24-hour PCB during the soil remediation activity. The ambient air monitoring frequency for PCBs may be increased to bi-weekly in the event that ambient particulate concentrations at any one location consistently exceed the proposed particulate notification level (i.e.  $>120 \mu\text{g}/\text{m}^3$ ). "Consistently exceeding" will be defined as concentrations greater than  $120 \mu\text{g}/\text{m}^3$  on three consecutive 10-hour days or 5 days in any two-week period.

PCB background monitoring will be conducted prior to any on-site soil remediation activity at two locations on the perimeter of the removal action area for these properties, between the proposed areas of excavation and adjacent receptors. During soil remediation activity, PCB monitoring will be conducted at two locations on the perimeter of the removal action area and one residential background location on Longfellow Avenue in Pittsfield, Massachusetts. Preliminary monitoring sites have been identified for the soil remediation activity, as shown on Figure E-1. Monitoring locations P2-1 and P2-2 will be utilized for PCB monitoring before and during soil removal activities on Parcels 18-4-2, 3, 4 and 18-4-201/202. These locations may be adjusted north or south to the most representative locations during construction activities. The locations will be noted and reported in the final project report.

The preliminary locations of the monitors were selected based firstly on the location of potential receptors and the location of site activity, and secondly on both wind

direction and the presence of obstructions and other influences that may adversely affect the representativeness of the data. The areas of excavation at these floodplain properties are relatively small. The predominant wind direction is west-northwest based on five- and ten-year wind rose data from the Albany, New York National Weather Service station. Data from the GE-owned station at the GE facility in Pittsfield, MA and data from a weather station at the Pittsfield airport also demonstrate a predominant WNW wind direction; however, the data from the local stations show that the local wind direction and speed vary considerably. Since the potential receptors at these properties are west of the excavation areas and east of Deming Street, air monitors have generally been placed in locations that provide adequate coverage between the areas of construction and potential receptors regardless of wind direction. No monitors will be placed east of construction activities, since the amount of time required to complete the project will likely be small due to the size of the excavation areas, and because the Housatonic River is between work areas and any potential receptors east of these locations.

The specific sampling locations for monitors may be modified based on the location and nature of the soil remediation activity, predominant wind direction, the location of potential receptors, physical obstructions (i.e. trees, buildings), the availability of power, site security, site accessibility, etc. Any significant modifications to the locations of monitors will be reviewed with the GE Project Manager.

The detection limit (DL) for PCB analysis of the high volume samples will be  $0.0003 \mu\text{g}/\text{m}^3$ , in consideration of the following:

Avg. Sampling Rate	0.225 $\text{m}^3/\text{min}$ .
Avg. Sample Volume	324 $\text{m}^3/\text{PUF}$
Analytical DL	0.1 $\mu\text{g}/\text{PUF}$
Project DL	0.0003 $\mu\text{g}/\text{m}^3$

The sampling method to be used for PCBs in the high volume samples is US EPA Compendium Method TO-4A, Determination of Pesticides and Polychlorinated Biphenyls in Ambient Air Using High Volume Polyurethane Foam (PUF) Sampling Followed by Gas Chromatographic/Multi-Detector Detection (GC/MD). This method employs a modified high volume sampler consisting of a glass fiber filter with a polyurethane foam (PUF) backup absorbent cartridge to sample ambient air at a rate of  $0.225 \text{m}^3/\text{min}$ . A General Metal Works Model GPS-1 Sampler or equivalent will be used. The filter and cartridge will be placed in clean, sealed containers and returned to the laboratory for analysis.

Procedures for sample media preparation and calibration of the sampling system are specified in Method TO-4A. TO-4A further specifies procedures for calculation and data reporting, and the assessment of data for accuracy and precision.

The samplers will be monitored at six-hour intervals over each 24-hour sampling

period. During these six-hour checks, barometric pressure, temperature, and magnehelic pressure readings will be taken and the air flow adjusted to the target flow rate, as necessary. At the end of the sampling period, the sampling modules containing the fiber filters and PUF adsorbents will be removed from the samplers. Each glass fiber filter will be folded and placed on the PUF adsorbent for that sample and each sample consisting of a fiber filter and PUF adsorbent (inside a glass cartridge) will be wrapped in hexane rinsed aluminum foil. Each fiber filter and PUF adsorbent set will be labeled as one sample. The samples will be wrapped, packaged in blue ice and sent under chain-of-custody to the laboratory for analysis.

The PCB sampling probe height for all high volume monitors will be approximately 2.0 meters above the ground. This height is adequate to represent the breathing zone and to be above the influence of ground activity around the monitor. The location of the samplers will be in conformance, to the extent practical, with the siting requirements for ambient monitors in Ambient Monitoring Guidelines for Prevention of Significant Deterioration (PSD), U.S. EPA. May, 1987.

#### 4.2 *Analytical Procedures*

In the high volume samples, the PCBs will be recovered by Soxhlet extraction with 10% diethyl ether in hexane. The extracts will be reduced in volume using Kuderna-Danish (K-D) concentration techniques and subjected to column chromatographic cleanup. The extracts will be analyzed for PCBs using gas chromatography with either electron capture detection (GC/ECD) or mass spectrometry detection (GC/MS) as described TO-4A.

The samples will be analyzed for the following PCB Aroclors: PCB-1016, PCB-1221, PCB-1232, PCB-1242, PCB-1248, PCB-1254 and PCB-1260.

## **5.0 PARTICULATE MONITORING**

Ambient air monitoring for particulate matter will be conducted during all soil remediation activities. Specifically, real-time ambient particulate monitoring will be performed during all active on-site soil remediation activities. Such monitoring will be conducted at two on-site locations, which may vary slightly as site activities progress, and at one residential background location on Longfellow Avenue in Pittsfield, Massachusetts. Preliminary monitoring sites have been identified on Figure E-1 (see the discussion of monitoring locations in Section 4.0 of this Scope of Work). The specific locations for stations will be selected based on the location and nature of the soil remediation activities, predominant wind direction, location of potential receptors, availability of power, site accessibility, and site security.

At the background and at least one on-site location, real-time particulate monitoring will be performed using a MIE dataRAM Model DR-2000/4000 real time particulate monitor, a MetOne E-BAM monitor, or equivalent. Each Model DR-2000/4000 monitor is equipped with a temperature conditioning heater and in-line impactor head to monitor and record particulate concentrations with a mean diameter less than 10 micrometers (PM<sub>10</sub>). The MetOne E-BAM uses beta attenuation as a measurement technique. The mass of suspended particulate is measured by the decrease in the number of beta particles passed over a particulate filtering medium due to absorption by the particulate. At the remaining on-site location, real-time particulate monitoring will be performed using one of the two previously mentioned monitors or a MIE dataRAM Model pDR-1000 monitor. Particulate monitoring will typically be conducted at all sites for approximately 10 hours daily, from 7 a.m. to 5 p.m., during soil remediation activities. Additional site activities may warrant a longer monitoring period. Particulate data will be recorded and averaged by the instruments' dataloggers every 15 minutes.

Calibrations and maintenance will be conducted at the frequency and in accordance with the procedures recommended by the manufacturer. All calibrations will be recorded.

## **6.0 QUALITY ASSURANCE AND QUALITY CONTROL PROCEDURES**

Quality assurance and quality control (QA/QC) procedures for the PCB air sampling program follow those described in the Ambient Air Monitoring Plan contained in the GE Project Operations Plan (AAMP/POP) and Method TO-4A. Quality assurance and quality control for the particulate sampling will be based on manufacturer's recommendations.

## **7.0 PCB SAMPLE DOCUMENTATION, HANDLING AND SHIPMENT**

Each filter holder and PUF cartridge holder will be pre-marked with a permanent identification number. As each sample is collected, it will be recorded on a field data form along with the date, time and location of collection.

All samples will be securely wrapped for shipment. PCB samples will be preserved at 4°C and shipped on ice. Samples will be shipped under chain-of-custody by commercial overnight carrier or courier to the analytical laboratory. Complete details on the PCB sample shipment procedures are contained in the AAMP/POP.

## **8.0 METEOROLOGICAL MONITORING**

Hourly meteorological data from the Automated Surface Observation System (ASOS) Monitor operated at the Pittsfield Municipal Airport in Pittsfield, Massachusetts will be included with the sampling results. This ASOS Monitor is operated by the National Weather Service, Federal Aviation Administration, and the Department of Defense. The ASOS Monitor measures and records wind speed, wind direction, precipitation, temperature, sky conditions, barometric pressure, and relative humidity.

## **9.0 DOCUMENTATION AND REPORTING**

Particulate data will be summarized and reported to the GE Project Manager and the Blasland, Bouck & Lee (BBL) Project Manager. If there is an exceedance of a reporting threshold, GE will be notified as soon as possible. All field and laboratory data recorded during ambient monitoring will be documented according to the procedures in the AAMP/POP. A written report summarizing the results will be provided to GE and BBL after the conclusion of sampling and will include the following:

- Date and Time of Sampling
- Sampling Locations
- Calibration and Maintenance Activities
- Pollutants Monitored
- Number of Samples Collected
- Analytical Results
- Quality Assurance Assessment
- Meteorological Data Summary
- Discussion of Problems or Disruptions

## 10.0 ACTION LEVELS

### 10.1 PCBs

The notification and action levels for PCB concentrations in ambient air are  $0.05 \mu\text{g}/\text{m}^3$  (24-hour average) and  $0.1 \mu\text{g}/\text{m}^3$  (24-hour average), respectively. These are the same levels established by EPA for other remediation activities at the GE-Pittsfield/Housatonic River Site.

If the  $0.05 \mu\text{g}/\text{m}^3$  notification level is exceeded, GE will notify EPA promptly, but no later than 24 hours after receipt of the data showing such an exceedance, and will provide written notice within 72 hours after receipt of the data. If such an exceedance occurs, GE will implement additional response actions, in consultation with EPA, to prevent an exceedance of the action level. The actions to be considered in such circumstances will include those previously implemented by GE at other areas at the GE-Pittsfield/Housatonic River Site (e.g., increased frequency of monitoring, establishment of additional monitoring locations, increased use of dust suppression measures, modifications to dust-producing activities).

If the action level of  $0.1 \mu\text{g}/\text{m}^3$  is exceeded, GE will: (a) notify EPA immediately upon receipt of the data showing such an exceedance; (b) temporarily cease ongoing excavation activities; (c) discuss with EPA appropriate immediate or short-term response actions to address the exceedance; and (d) provide written notice to EPA within 72 hours after receipt of the data. In addition, GE will evaluate the cause of the exceedance and the need for additional engineering controls, discuss that evaluation with EPA, and if warranted, propose to EPA appropriate engineering controls or other corrective actions. EPA approval of appropriate response actions and engineering controls, if proposed, will be required before GE resumes excavation activities.


### 10.2 Particulate Matter

For each day of monitoring, the average 10-hour  $\text{PM}_{10}$  concentration at any on-site monitor will be compared with the notification level of  $120 \mu\text{g}/\text{m}^3$  – which represents 80 percent of the current 24-hour National Ambient Air Quality Standard (NAAQS) for  $\text{PM}_{10}$  ( $150 \mu\text{g}/\text{m}^3$ ). This notification level has been selected to allow notice to GE before concentrations reach the level of the 24-hour NAAQS (the action level).

Any exceedance of the notification level will be reported to EPA as soon as practicable following receipt of data showing the exceedance, and a written notice will be provided within 72 hours after receipt of the data. If such an exceedance occurs, GE will take appropriate steps to prevent an exceedance of the action level and will discuss with EPA the need for and type of additional response measures. The actions to be considered in these circumstances will include the same types of measures listed above for exceedances of the notification level for PCBs, or other appropriate measures.


In the event that any 10-hour average  $PM_{10}$  concentration at an on-site monitor exceeds the level of the NAAQS for  $PM_{10}$  (the action level), GE will: (a) report such exceedance to EPA immediately following receipt of data showing the exceedance; (b) temporarily cease ongoing excavation activities; (c) discuss with EPA appropriate immediate or short-term response actions to address the exceedance; and (d) provide written notice to EPA within 72 hours after receipt of the data. In addition, GE will evaluate the cause of the exceedance and the need for additional engineering controls, discuss that evaluation with EPA, and propose to EPA appropriate engineering controls or other corrective actions. EPA approval of appropriate response actions and engineering controls, if proposed, will be required before GE resumes excavation activities.

SYR-85-DWM LAF DMW LAYER: ON=\*, OFF=\*REF\*, [CL RIVER\*]  
 G:\GE\_ACTIVE\N\_40122004 PHASE2 ADDENDUM\40122047.DWG  
 PENTABLE:PLT\FULL.CTB PRINTED:12/11/2006 1:53 PM BY:DWODARCZYK  
 LAYOUT:E-1 PAGES:1/1  
 XREFS: IMAGES:  
 40122X03

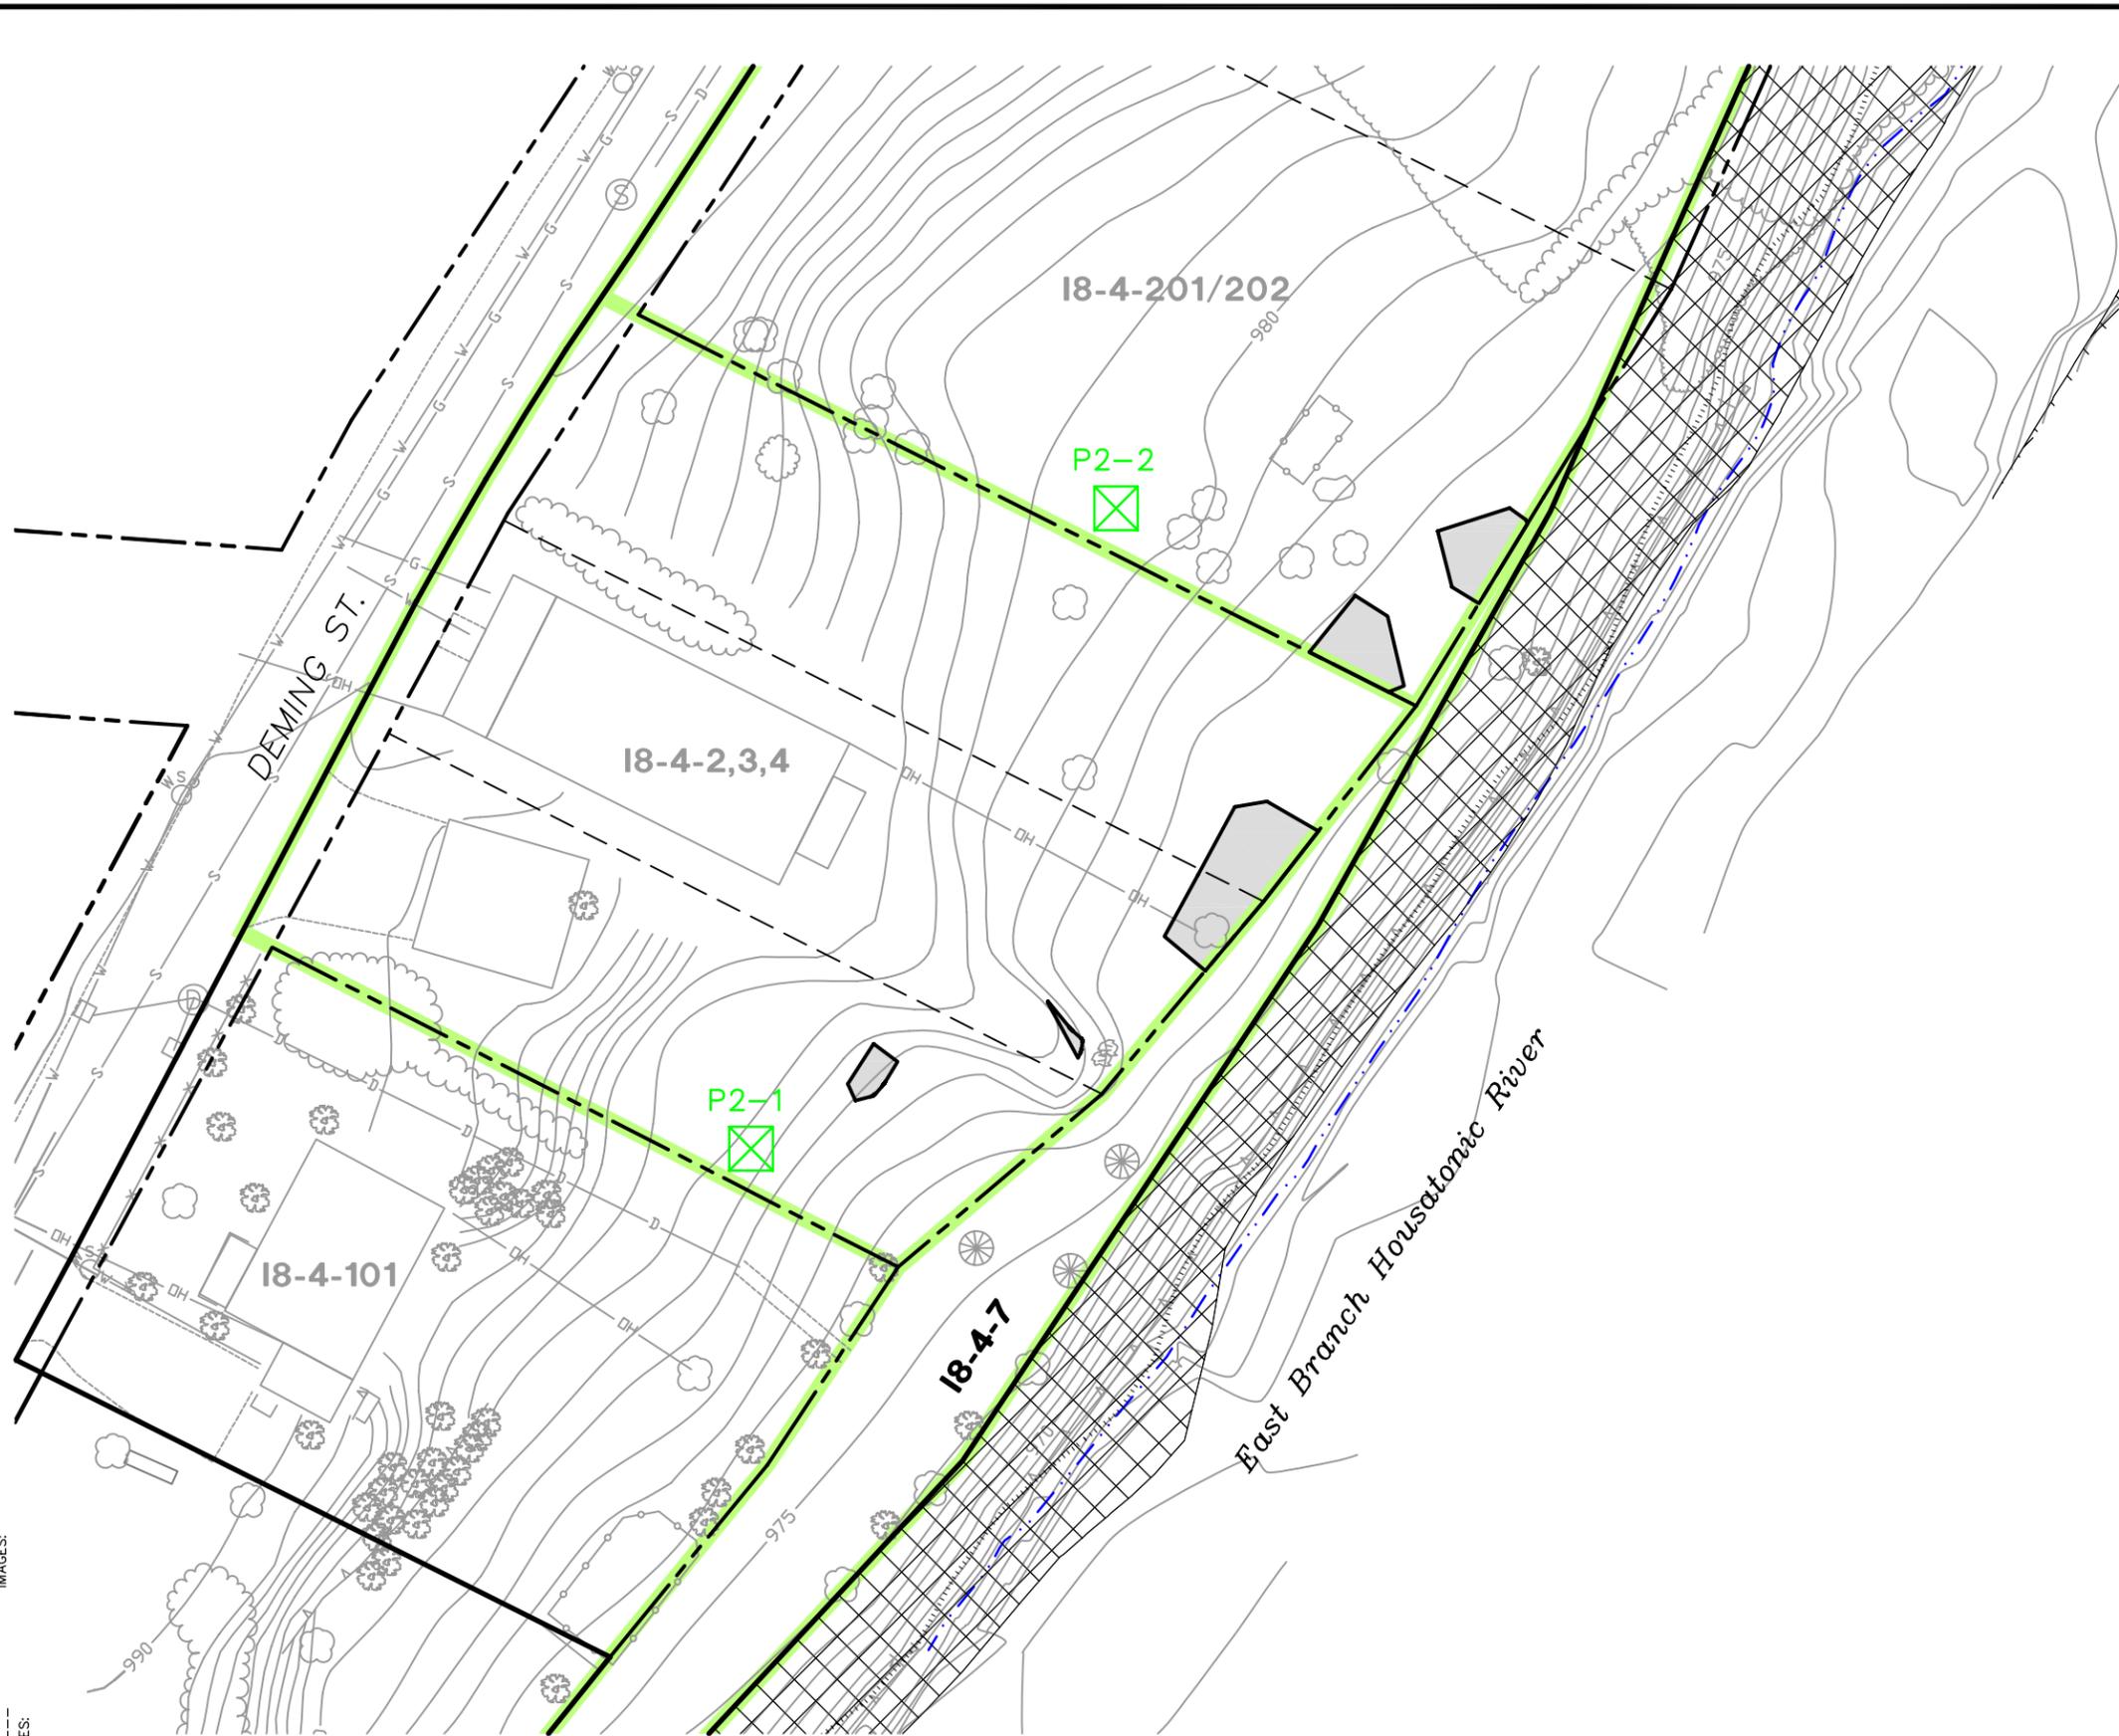

- LEGEND:**
- BOUNDARY OF FLOODPLAIN PROPERTIES DESIGNATED IN SOW (FOR PHASE 2)
  - APPROXIMATE PARCEL BOUNDARY
  - APPROXIMATE HORIZONTAL LIMITS OF AVERAGING AREA
  - BOUNDARY BETWEEN COMMONLY OWNED TAX PARCELS
  - 18-4-2,3,4** RESIDENTIAL PROPERTY PARCEL ID
  - 18-4-7** NON-RESIDENTIAL PROPERTY PARCEL ID
  - 10 YEAR FLOODPLAIN
  - FENCELINE
  - WATER LINE
  - GAS LINE
  - SANITARY SEWER
  - DRAIN LINE
  - OVERHEAD ELECTRIC
  - RETAINING WALL
  - EDGE OF BUSHES/HEDGE
  - TREE
  - DRAIN MANHOLE
  - SANITARY MANHOLE
  - WATER SHUTOFF
  - APPROXIMATE EDGE OF WATER
  - AREA TO BE ADDRESSED BY EPA IN 1 1/2 MILE REACH REMOVAL ACTION
  - LIMITS OF SOIL REMOVAL
  - APPROXIMATE PROPOSED AMBIENT AIR PCB AND PARTICULATE MONITORING LOCATION

- NOTES:**
1. THE BASEMAP FEATURES PRESENTED ON THIS FIGURE FROM PHASE1BASE.DWG BY WESTON SOLUTIONS FOR THE DEPARTMENT OF THE ARMY CORPS OF ENGINEERS DATED 1/15/03.
  2. THE 10 YEAR FLOODPLAIN LINE IS APPROXIMATE AND WAS DERIVED USING HYDRAULIC MODELING PERFORMED BY BLASLAND, BOUCK & LEE, INC. (1994) AND AVAILABLE TOPOGRAPHIC MAPPING.



GENERAL ELECTRIC COMPANY  
 PITTSFIELD, MASSACHUSETTS  
**SUPPLEMENTAL SOIL EVALUATION REPORT AND RD/RA WORK PLAN  
 ADDENDUM FOR SELECTED PHASE 2 FLOODPLAIN PROPERTIES**

**PROPOSED AMBIENT AIR PCB AND  
 PARTICULATE MONITORING LOCATIONS**

**BBL**  
 an ARCADIS company

FIGURE  
**E-1**