

DESIGN-LEVEL DATA SOIL INVESTIGATION WORK PLAN

**Franklin Power Products, Inc. / Amphenol Corporation
Administrative Order on Consent, Docket #R8H-5-99-002
EPA ID # IND 044 587 848
980 Hurricane Road
Franklin, Indiana 46131**

Prepared For:

**Carolyn Bury
United States Environmental Protection Agency, Region 5
77 West Jackson Boulevard
Chicago, Illinois 60604**

Date: February 19, 2019

Prepared by:

**IWM Consulting Group, LLC
7428 Rockville Road
Indianapolis, IN 46214
Phone No. (317) 347-1111
Fax No. (317) 347-9326**

TABLE OF CONTENTS

Introduction and Objectives	1
Proposed Boring Advancement	2
Soil Sampling Activities	4
Sample Identification, Collection, & Analysis	5
Reporting	6
Timeline	7

FIGURES

- Figure 1 – Preliminary Study Area Map
- Figure 2 – Upper Forsythe Street Soil Boring Location Map
- Figure 3 – Upper-Middle Forsythe Street Soil Boring Location Map
- Figure 4 – Lower-Middle Forsythe Street Soil Boring Location Map
- Figure 5 – Lower Forsythe Street Soil Boring Location Map
- Figure 6 – On-Site Soil Boring Location Map

ATTACHMENTS

- A. USEPA Letter dated December 11, 2018
- B. IWM Consulting Standard Operating Procedures



February 19, 2019

Ms. Carolyn Bury
Project Manager
Corrective Action Section 2
Remediation and Re-use Branch
U.S. Environmental Protection Agency, Region 5
77 West Jackson Boulevard
Chicago, IL 60604-3590

Re: **Design-Level Data Soil Investigation Work Plan
Franklin Power Products, Inc./Amphenol Corporation
Administrative Order on Consent, Docket # R8H-5-99-002
EPA ID # IND 044 587 848
980 Hurricane Road
Franklin, Indiana 46131**

Dear Ms. Bury:

In accordance with the United States Environmental Protection Agency (USEPA) letter dated December 11, 2018 and subsequent email and conference call from February 6, 2019, Industrial Waste Management Consulting Group, LLC (IWM Consulting), on behalf of the “Performing Respondent”, Amphenol Corporation (Amphenol), is submitting this *Design-Level Data Soil Investigation Work Plan* (Work Plan). Due to the USEPA being on a government mandated furlough, a “Draft” Work Plan was submitted on January 25, 2019 to meet the requested reporting deadline. This Work Plan outlines the proposed work activities relating to the investigation and delineation of adsorbed phase volatile organic compounds (VOCs) and non-aqueous phase liquid (NAPL), if present, in the soil within the Study Area. The Study Area includes portions of streets that are near and downgradient of the Former Amphenol facility located at 980 Hurricane Road, Franklin, IN (Site), including Hurricane Road, Upper Shelbyville Road, Hamilton Avenue, North Forsythe Street, Glendale Drive, and Ross Court. This particular work phase will investigate areas specifically at the Site, and along Hamilton Avenue, Ross Court, and North Forsythe Street, north of Hurricane Creek.

The objectives of the proposed work activities are as follows:

- Complete delineation of the vertical and horizontal extent of adsorbed phase VOCs and NAPL (if present) in soil along the current sanitary sewer line in Hamilton Avenue, North Forsythe Street, and Ross Court and along the former on-Site sanitary sewer line. The results will be compared to Indiana Department of Environmental Management (IDEM) Remediation Closure Guide (RCG) Residential Soil Migration to Groundwater (MTGW) screening levels and the work will also verify potential soil impacts are delineated perpendicular to the sanitary sewer line and prior to reaching Hurricane Creek.

- Utilize soil data collected from Hamilton Avenue, North Forsythe Street, Ross Court, and on-Site to determine if additional delineation is warranted, which would necessitate the need to acquire private access agreements with individual property owners.
- Utilize soil data to assist in the development of the *Off-site Interim Measure Work Plan*.

This Work Plan outlines the proposed methodology and sampling activities that will be utilized during the Work Plan implementation activities. A site vicinity map is provided as **Figure 1**, which displays the location of the Site and properties in the vicinity of the Site. **Figure 2** through **Figure 5** display the proposed locations for the installation of soil borings off-Site and **Figure 6** displays the proposed locations for the installation of soil borings on-Site. A copy of the December 11, 2018 USEPA letter is provided as **Attachment A**.

Proposed Boring Advancement

The primary objective of this Work Plan is to define in both on- and off-Site the horizontal and vertical extent of adsorbed phase VOCs and NAPL, if present, in order to provide design-level data for the *Off-Site Interim Measure Work Plan*.

Based on the results of the off-Site soil gas investigation completed within the right-of-way (ROW), IWM Consulting is proposing the advancement of at least forty-seven (47) soil borings to the base of the first observed saturated unit (historically identified as “Unit B”), which is typically encountered at depths ranging from 2.6 to 19.5 feet below ground surface (bgs). Unit B is an unconfined water bearing sand unit which is underlain by a silty clay unit (previously identified as “Unit C”) with a thickness historically documented to be approximately 20-25 feet. The borings will be continuously sampled and select sample intervals will be submitted for laboratory analysis in order to determine if soils are impacted by the short-listed VOCs above, at, or below the sanitary sewer line. Soil borings will be placed approximately every 100 feet along the sewer line in addition to soil borings concentrated surrounding documented breaks in the sanitary sewer line, which were observed in a 2015 sewer inspection provided by the City of Franklin. The borings shown on top of the sanitary sewer line will actually be placed within 3 feet of the sanitary line, and will rotate to the east and west sides of the sanitary line as the borings are installed from north to south down North Forsythe Street. The off-Site proposed primary boring locations are displayed on **Figure 2** through **Figure 5**. Please note that these are proposed locations only and the final locations may have to be relocated in order to accommodate for subsurface or above ground structures/features (i.e. utilities). Following receipt of results from expedited analysis from the primary soil borings, if soil results exhibit concentrations greater than RCG MTGW screening levels, select secondary soil borings may be warranted. Secondary boring locations within the ROW are also shown on **Figure 2** through **Figure 5**. Additional borings may be advanced within the ROW (space and time permitting during the same mobilization) following the receipt of analytical results from the secondary borings.

IWM Consulting is proposing the advancement of at least nine (9) on-Site soil borings to the base of Unit B. The borings will be continuously sampled and select sample intervals will be submitted for laboratory analysis in order to determine if soils are impacted by the short-listed VOCs above, at, or

below the sanitary sewer line. Soil borings will be placed approximately every 100 to 120 feet along the former sanitary sewer line. The borings shown on top of the sanitary sewer line will actually be placed within 3 feet of the sanitary line, and will rotate to the east and west sides of the sanitary line as the borings are installed from north to south. The on-Site proposed primary boring locations are displayed on **Figure 6**. Please note that these are proposed locations only and the final locations may have to be relocated in order to accommodate for subsurface or above ground structures/features (i.e. utilities). Following receipt of results from expedited analysis from the primary soil borings, if soil results exhibit concentrations greater than RCG MTGW screening levels, select secondary soil borings may be warranted. Secondary boring locations within the on-Site property boundaries are also shown on **Figure 6**. Additional borings may be advanced on-Site (time permitting during the same mobilization) following the receipt of analytical results from the secondary borings.

Adsorbed VOC data between boring locations will be interpolated similarly to dissolved plumes and connected accordingly. The interpolated results will be further evaluated and confirmed during the implementation phase of the *Off-Site Interim Measure Work Plan*.

Additional soil borings may be warranted if the analytical results of the primary and secondary boring soil sampling exhibit concentrations in excess of RCG MTGW screening levels. In the event that additional soil borings are required beyond the ROW, IWM Consulting will pursue private access agreements with the appropriate private property owners and delineate soil impacts to RCG MTGW screening levels on private property during a separate mobilization. However, these potential additional soil boring locations on private property will be dependant on soil results, and thus are not shown on **Figure 2** through **Figure 6**.

Soil borings will be advanced utilizing direct-push technology. The direct-push probe utilizes hydraulics to advance a sampler into the soil; consequently, excess soil cuttings are not generated during direct-push drilling activities. Continuous soil samples will be obtained utilizing dual-tube sampling methods where a four-foot long acetate sleeve contained within a stainless-steel casing is advanced hydraulically to obtain the soil sample. Soil samples pass through the sampler cutting shoe and are retained within a sealed disposable acetate plastic sampling tube for retrieval. The acetate sleeve containing the soil sample is then removed while the stainless-steel outer casing remains in place. A new acetate sleeve is placed inside the casing for continued sampling and advancement of the borehole. Any soil cuttings generated will be placed in labeled 55-gallon steel drum(s) for characterization and future disposal. The drum(s) will be temporarily stored near the existing groundwater treatment building located on the Site.

Strict decontamination procedures will be followed during the investigation activities by IWM Consulting personnel to reduce the potential for cross-contamination. Drilling and all non-disposable, down-hole sampling equipment will be decontaminated prior to first use on-site, and thereafter between uses, using a vigorous wash in Alconox solution, followed by a tap water and/or distilled water rinse. Any decontamination water generated will be temporarily placed in a 55-gallon steel drum, transported back to the Site, and then properly disposed of at a certified disposal facility.

The soil samples collected will be field screened using a photo-ionization detector (PID) in an effort to determine the relative presence of adsorbed VOCs. The soil will also be visually examined and logged in general accordance with the Unified Soil Classification System (USCS). To ensure accurate VOC screening, the quantity of the soil, temperature, and headspace volume are kept as constant as possible. Prior to field activities, the PID will be calibrated in accordance with manufacturer's directions to minimize error through instrument drift. It should be noted that elevated PID readings are not always a reliable indicator of dissolved chlorinated solvent impacts.

The borings will be advanced to the base of the first encountered saturated zone (Unit B) and are not anticipated to exceed a total depth of 24 feet bgs.

Soil Sampling Activities

Soil samples will be collected from the soil borings to determine if soil impacts or NAPL are present. This information will be utilized in the development of the *Off-site Interim Measure Work Plan*.

In order to characterize soils located between the ground surface and the top of the sanitary sewer line for future disposal or potential re-use during implementation of the *Off-Site Interim Measure Work Plan*, one soil sample will be collected from the one-foot interval located above the sanitary sewer line for laboratory analysis. It should be noted that elevated PID readings are not always a reliable indicator of adsorbed chlorinated solvent impacts, however, if a sample exhibits an elevated PID reading (greater than 5 parts per million vapor {ppmv}) from the surface to one-foot above the sanitary sewer line interval, an additional sample will also be selected for laboratory analysis. Additional soil samples will be collected from beneath the approximate depth of the sanitary sewer line in North Forsythe Street, Hamilton Avenue, and Ross Court to characterize soils potentially impacted by chlorinated solvents released from breaks or cracks in the sanitary sewer line. Therefore, a second soil sample will be collected within approximately one-foot below the bottom of the sanitary sewer line, a third soil sample will be collected from the bottom one-foot of Unit B, and a fourth soil sample will be collected from the mid-point between the second and third sample intervals (if the thickness between the second and third sample intervals exceeds two feet). Based on previous observations, the maximum thickness of Unit B beneath the sanitary sewer line is approximately seven to eight feet (northern portion of North Forsythe Street).

Soil samples will be analyzed for short list VOCs using SW-846 Method 8260 and percent moisture. Soil samples collected for laboratory analysis of VOCs will be obtained in general accordance with EPA Sampling Method 5035 using bulk TerraCore sampling supplies, including the 5-gram T-handle sampling device (or comparable).

A table summarizing the Pace Analytical Services, LLC (Pace) reporting and method detection limits for each compound compared to IDEM RCG screening levels is included at the top of the following page.

VOC Compound	Pace Laboratory Reporting Limits (mg/kg)	Pace Laboratory Method Detection Limits (mg/kg)	IDEM RCG Soil Migration to Groundwater (mg/kg)	IDEM RCG Residential Direct Contact Screening Level (mg/kg)	IDEM RCG Commercial-Industrial Direct Screening Level (mg/kg)
1,1-DCA	0.005	0.0025	0.16	50	160
1,2-DCA	0.005	0.0025	0.028	6.4	20
cis-1,2- DCE	0.005	0.0025	0.41	220	2,300
trans-1,2-DCE	0.005	0.0025	0.62	1,900	1,900
Methylene Chloride	0.02	0.01	0.025	490	3,200
PCE	0.005	0.0014	0.045	110	170
1,1,1-TCA	0.005	0.0025	1.4	640	640
TCE	0.005	0.001	0.036	5.7	19
Vinyl Chloride	0.005	0.0025	0.014	0.83	17

Sample Identification, Collection, & Analysis

Field sample identification for this project should follow the following format: a sample location identification code (DSB-1 for Design Soil Boring-1), a two-letter sample matrix code (SL for soil), and numbers designating the sampling interval of each sampling location. The trip blank, field duplicate, and equipment blank samples should utilize the identification codes TB, FD, and EB, respectively. Examples of the field sample identification codes for this project are as follows:

- For design soil boring soil samples: DSB-1 SL (8' – 10')
(Design soil boring sampling location No. 1 – soil sample, interval 8' – 10' bgs)
- For temporary well soil field duplicate samples: FD-1 SL
(Soil sample field duplicate No. 1)
Note that no sampling location identification is utilized for the field duplicate. The field duplicate location/sampling identification information is to be recorded in the field project notebook.
- For equipment blank samples: EB-1 WT
(Equipment Blank - water sample No. 1)
- For trip blank water samples: TB-1 WT
(Trip Blank – water sample No. 1)

Standard protocols will be observed for sample collection, sample handling and preservation, and chain-of-custody (COC) documentation. Personnel will utilize clean, disposable, nitrile gloves for each sample obtained. Laboratory provided sample containers will be utilized. Prior to use, the sample containers will be inspected for cracks, chips, cleanliness, and preservative (as appropriate). Container threads will be wiped clean before sealing (if applicable) to ensure proper sealing. The sample containers will be labeled with the appropriate project name and/or number, sample identification designation, date, time, and sampler's name or initials. Samples will be placed in a cooler containing ice and maintained at a temperature of approximately 4° Celsius prior to analysis.

Samples will be analyzed by the laboratory using a 48-hour turnaround time (TAT) and Level IV quality assurance/quality control (QA/QC) procedures. IWM Consulting anticipates initially obtaining at least two-hundred twenty-four (224) soil samples which will be collected from the soil borings for select VOC analysis. Additional soil samples may be collected if the results from the initial soil sampling indicate additional horizontal delineation is warranted. For QA/QC purposes, one (1) field duplicate will be collected at a rate of one (1) sample per every ten (10) samples per sampling media and will be analyzed for the same analytical parameters. In addition, one (1) matrix spike/matrix spike duplicate (MS/MSD) sample will be collected at a rate of one (1) sample per every twenty (20) confirmatory samples per sampling media and will be analyzed for the same analytical parameters. One (1) trip blank for VOC analysis will accompany each cooler shipment that contains samples for select VOC analyses. One (1) equipment blank per sampling media per day will be obtained. The equipment blank will be collected by pouring laboratory-prepared water or distilled water over or through the field sampling equipment (e.g., the cutting shoe or bladder pump) and collecting the rinsate in the proper analytical containers. If only disposable or single use sampling equipment is used, then a field blank, consisting of analyte-free water poured into a laboratory provided container in the field (in order to assess the potential for sample contamination due to field conditions) will be collected in lieu of an equipment blank.

The Pace COC, pertinent information such as laboratory certifications for Pace, and USEPA RSLs for this project were previously submitted as Attachments C, D, and E and conditionally approved by the USEPA during the implementation of the *Off-site Groundwater Investigation Work Plan* dated October 18, 2018. The applicable Standard Operating Procedures (SOPs) which will be followed by IWM Consulting during the soil sampling activities, are provided as **Attachment B**.

Reporting

Preliminary results, including a copy of the laboratory report, a site map displaying the final sampling locations, boring logs, and a table summarizing the results, will be supplied to representatives from the USEPA as soon as possible once the information has been received and reviewed. The soil analytical results will be compared to IDEM RCG screening levels and submitted to the USEPA. Prior to submission of the final analytical results, the analytical results will be validated by a third-party data validation firm and the validation report will be submitted to the USEPA.

Timeline

The table below is the estimated timeline associated with implementing this Work Plan.

Task	Anticipated Estimated Completion Date	Comments
Submittal of Draft Work Plan	January 25, 2019	
Receipt of USEPA Comments and conference call with USEPA	February 6, 2019	
Submittal of Work Plan	February 19, 2019	
USEPA Conditional Approval of the Work Plan	Mid to Late-February 2019	Date based upon when the USEPA returns from government mandated furlough and reviews the Work Plan
Installation of Primary Soil Borings	February 25 through February 27, 2019	Based on USEPA approval, weather, receipt of site access/ROW permits, and subcontractor availability
Installation of Temporary Wells per <i>Additional Off-Site Groundwater Investigation Work Plan</i>	February 28 through March 5, 2019	Based on USEPA approval, weather, receipt of site access/ROW permits, and subcontractor availability – if off-site access is granted at a later date, a second mobilization may be required.
Receipt of Preliminary Laboratory Analytical Results from Primary Soil Borings	February 28 through March 5, 2019	Expedited analysis required, anticipate within 48 hours of sampling event
Installation of Secondary Soil Borings, if necessary	March 6 through March 8, 2019	Based on USEPA approval, weather, receipt of site access/ROW permits, and subcontractor availability
Obtain Private Access and Installation of Additional Soil Borings, if necessary	Mid-March to Mid-April 2019	Based on results of initial and secondary soil borings, private access and installation of additional borings may be warranted. Boring installation will be dependant on weather, receipt of access, and subcontractor availability
Survey of ground surface at each boring location	Late-March to Early April 2019	Survey completed by licensed surveyor, based on weather and subcontractor availability
Submittal of Preliminary Laboratory Results to the USEPA	Late-March to Early April 2019	
Submittal of Final Results to the USEPA	May 2019	

The additional items requested in the USEPA's *Request for Off-Site Interim Measure Work Plan* letter dated December 11, 2018 will be supplied following the collection, review, and evaluation of the design-level data.

Please do not hesitate to contact the undersigned with questions or if you need additional information regarding this submittal.

Sincerely,


IWM CONSULTING GROUP, LLC

Christopher D. Parks, LPG #2169
Senior Project Manager

Bradley E. Gentry, LPG #2165
Vice President/Brownfield Coordinator

cc: Mr. Joseph Bianchi, Amphenol (electronic only)
Carolyn Bury, U.S. EPA Region 5, RRB CAS2 (electronic only)
Bhooma Sundar, U.S. EPA Region 5, RRB CAS2 (electronic only)
Conor Neal, U.S. EPA Region 5, RRB CAS2 (electronic only)

Figures

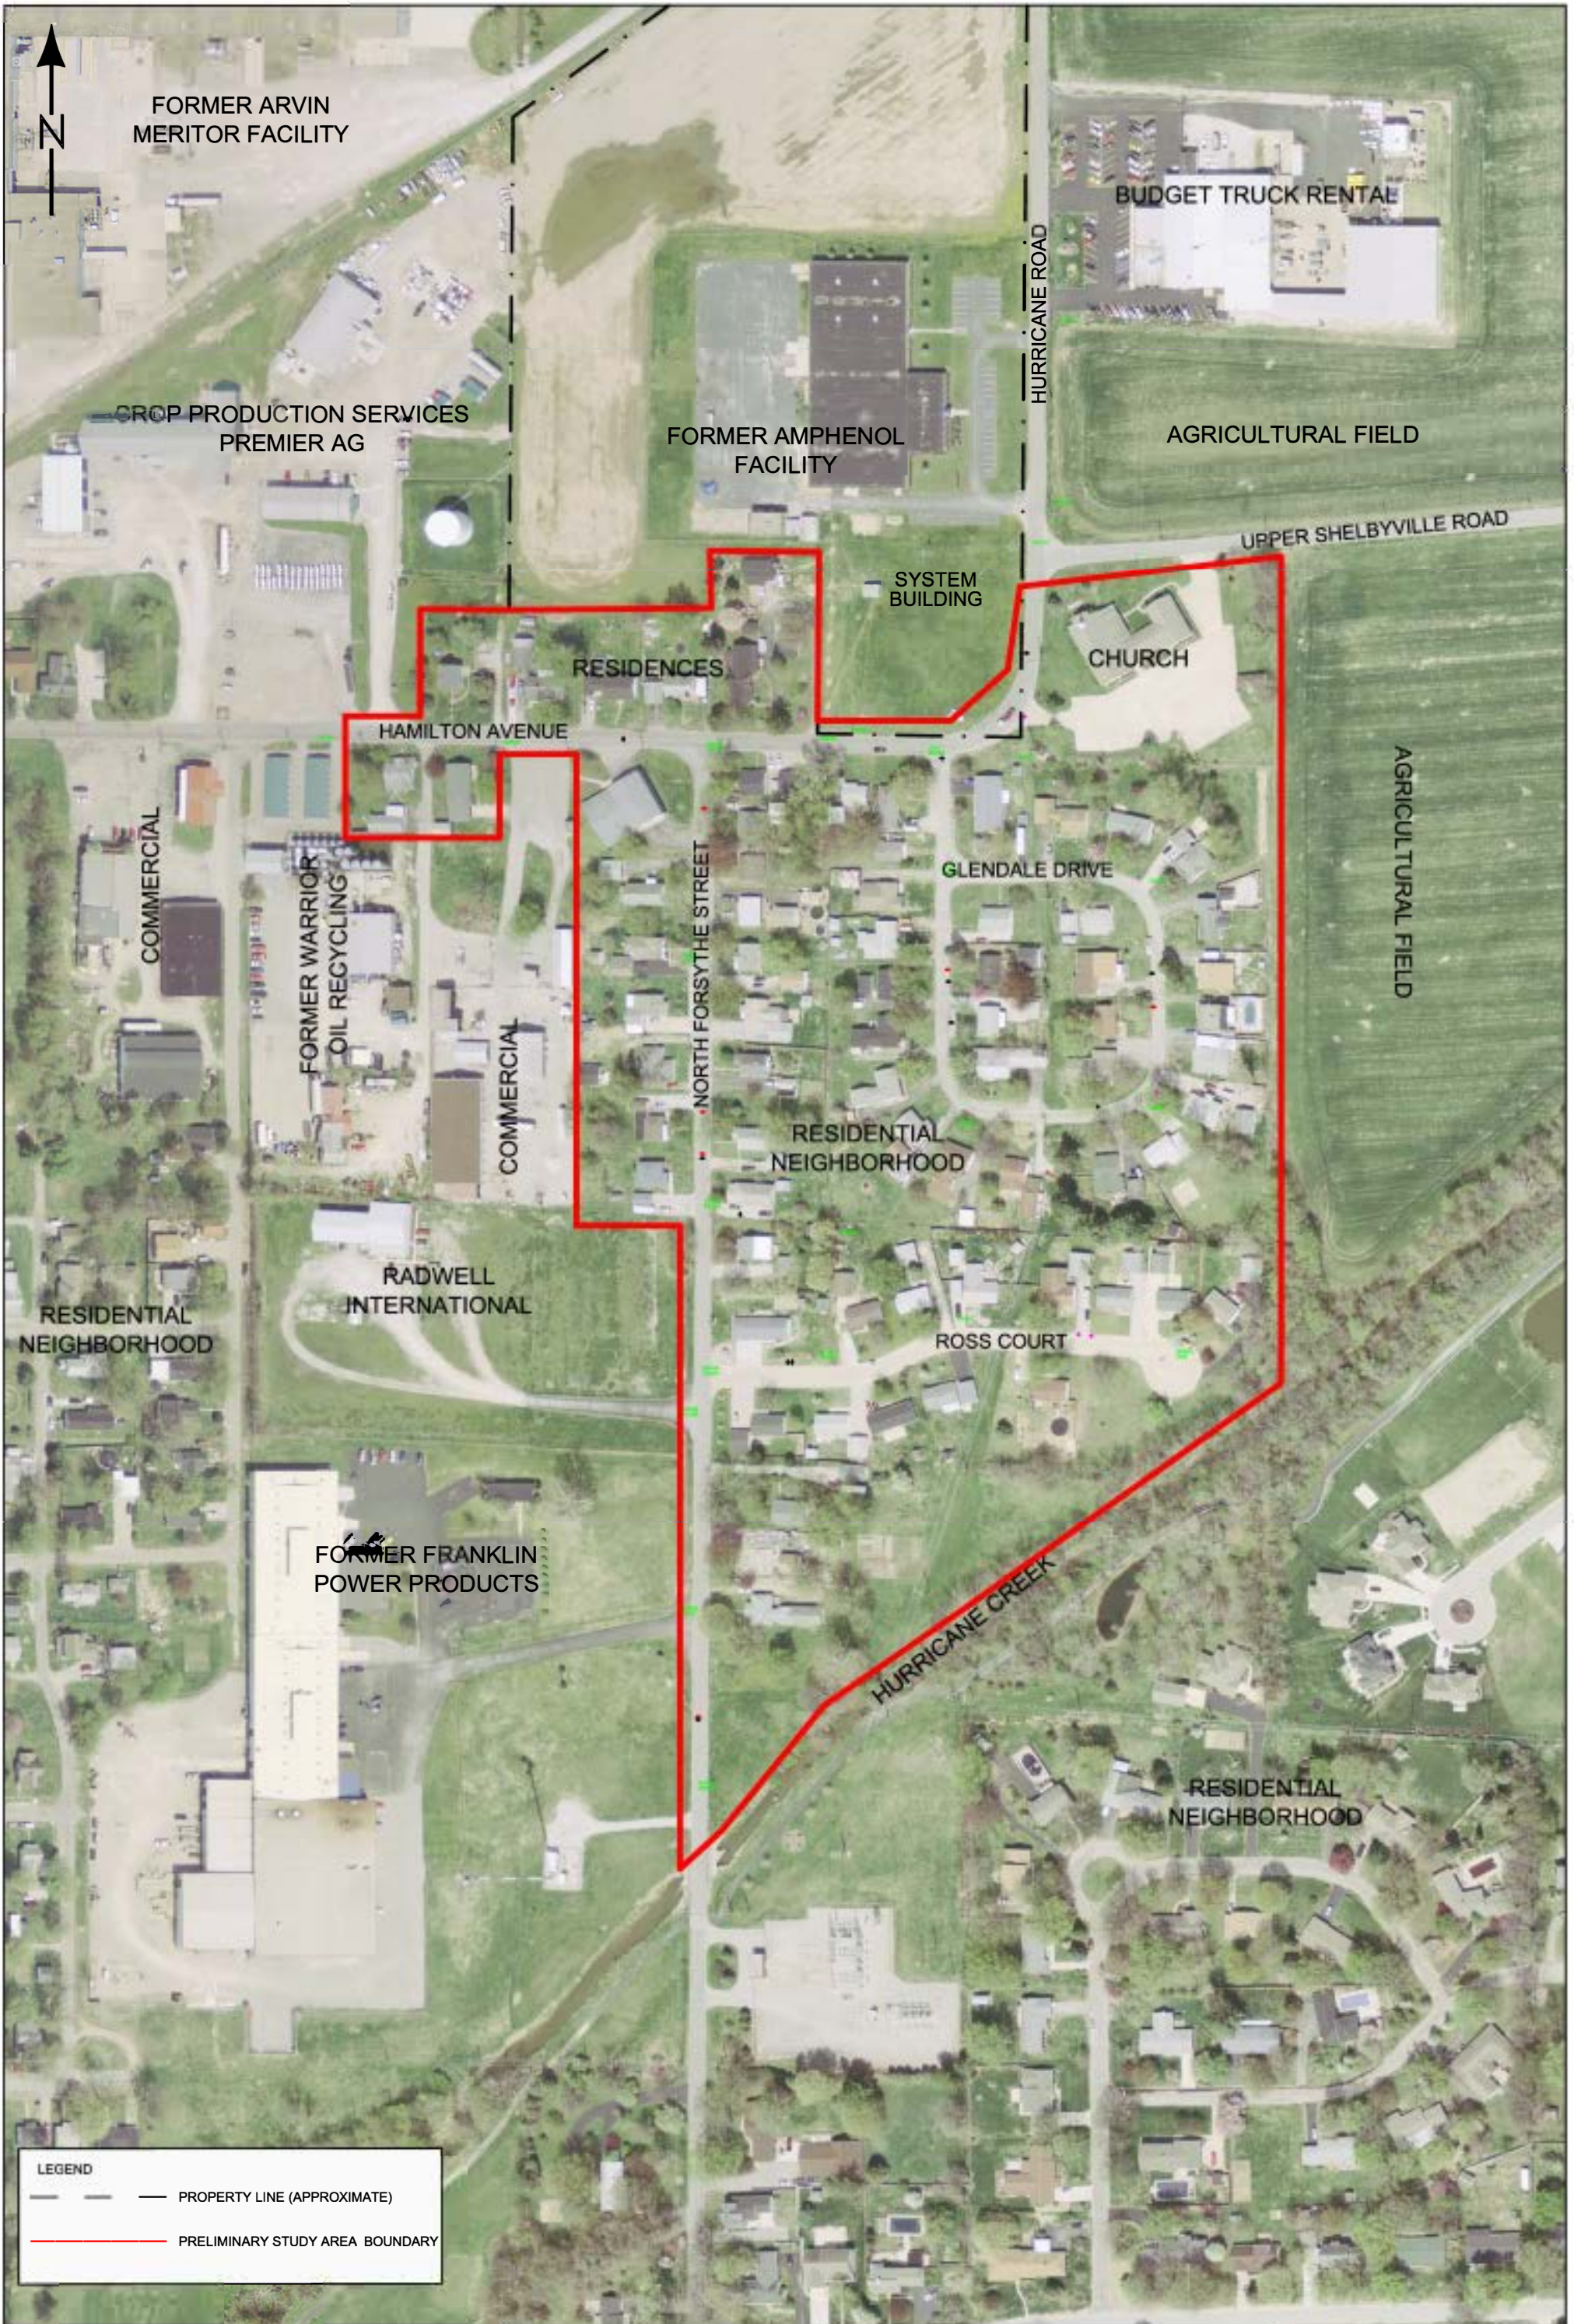

LEGEND

— PROPERTY LINE (APPROXIMATE)

— PRELIMINARY STUDY AREA BOUNDARY

0' 200'
SCALE IN FEET

DRAWN BY: L. STRUM
DATE: 9/27/99
REVISED: 09/10/2018
HWP# #111291-01
DWG. NO. 111291S1

FIGURE 1
PRELIMINARY STUDY
AREA MAP

FORMER AMPHENOL RFI/CMS
980 HURRICANE ROAD
FRANKLIN, INDIANA



MW-12F
(14.60') SS-SOUTH

250055

HAMILTON AVENUE


250052
(9.38')

(VCP)


N. FORSYTHE STREET

MW-34

250051
(9.20')

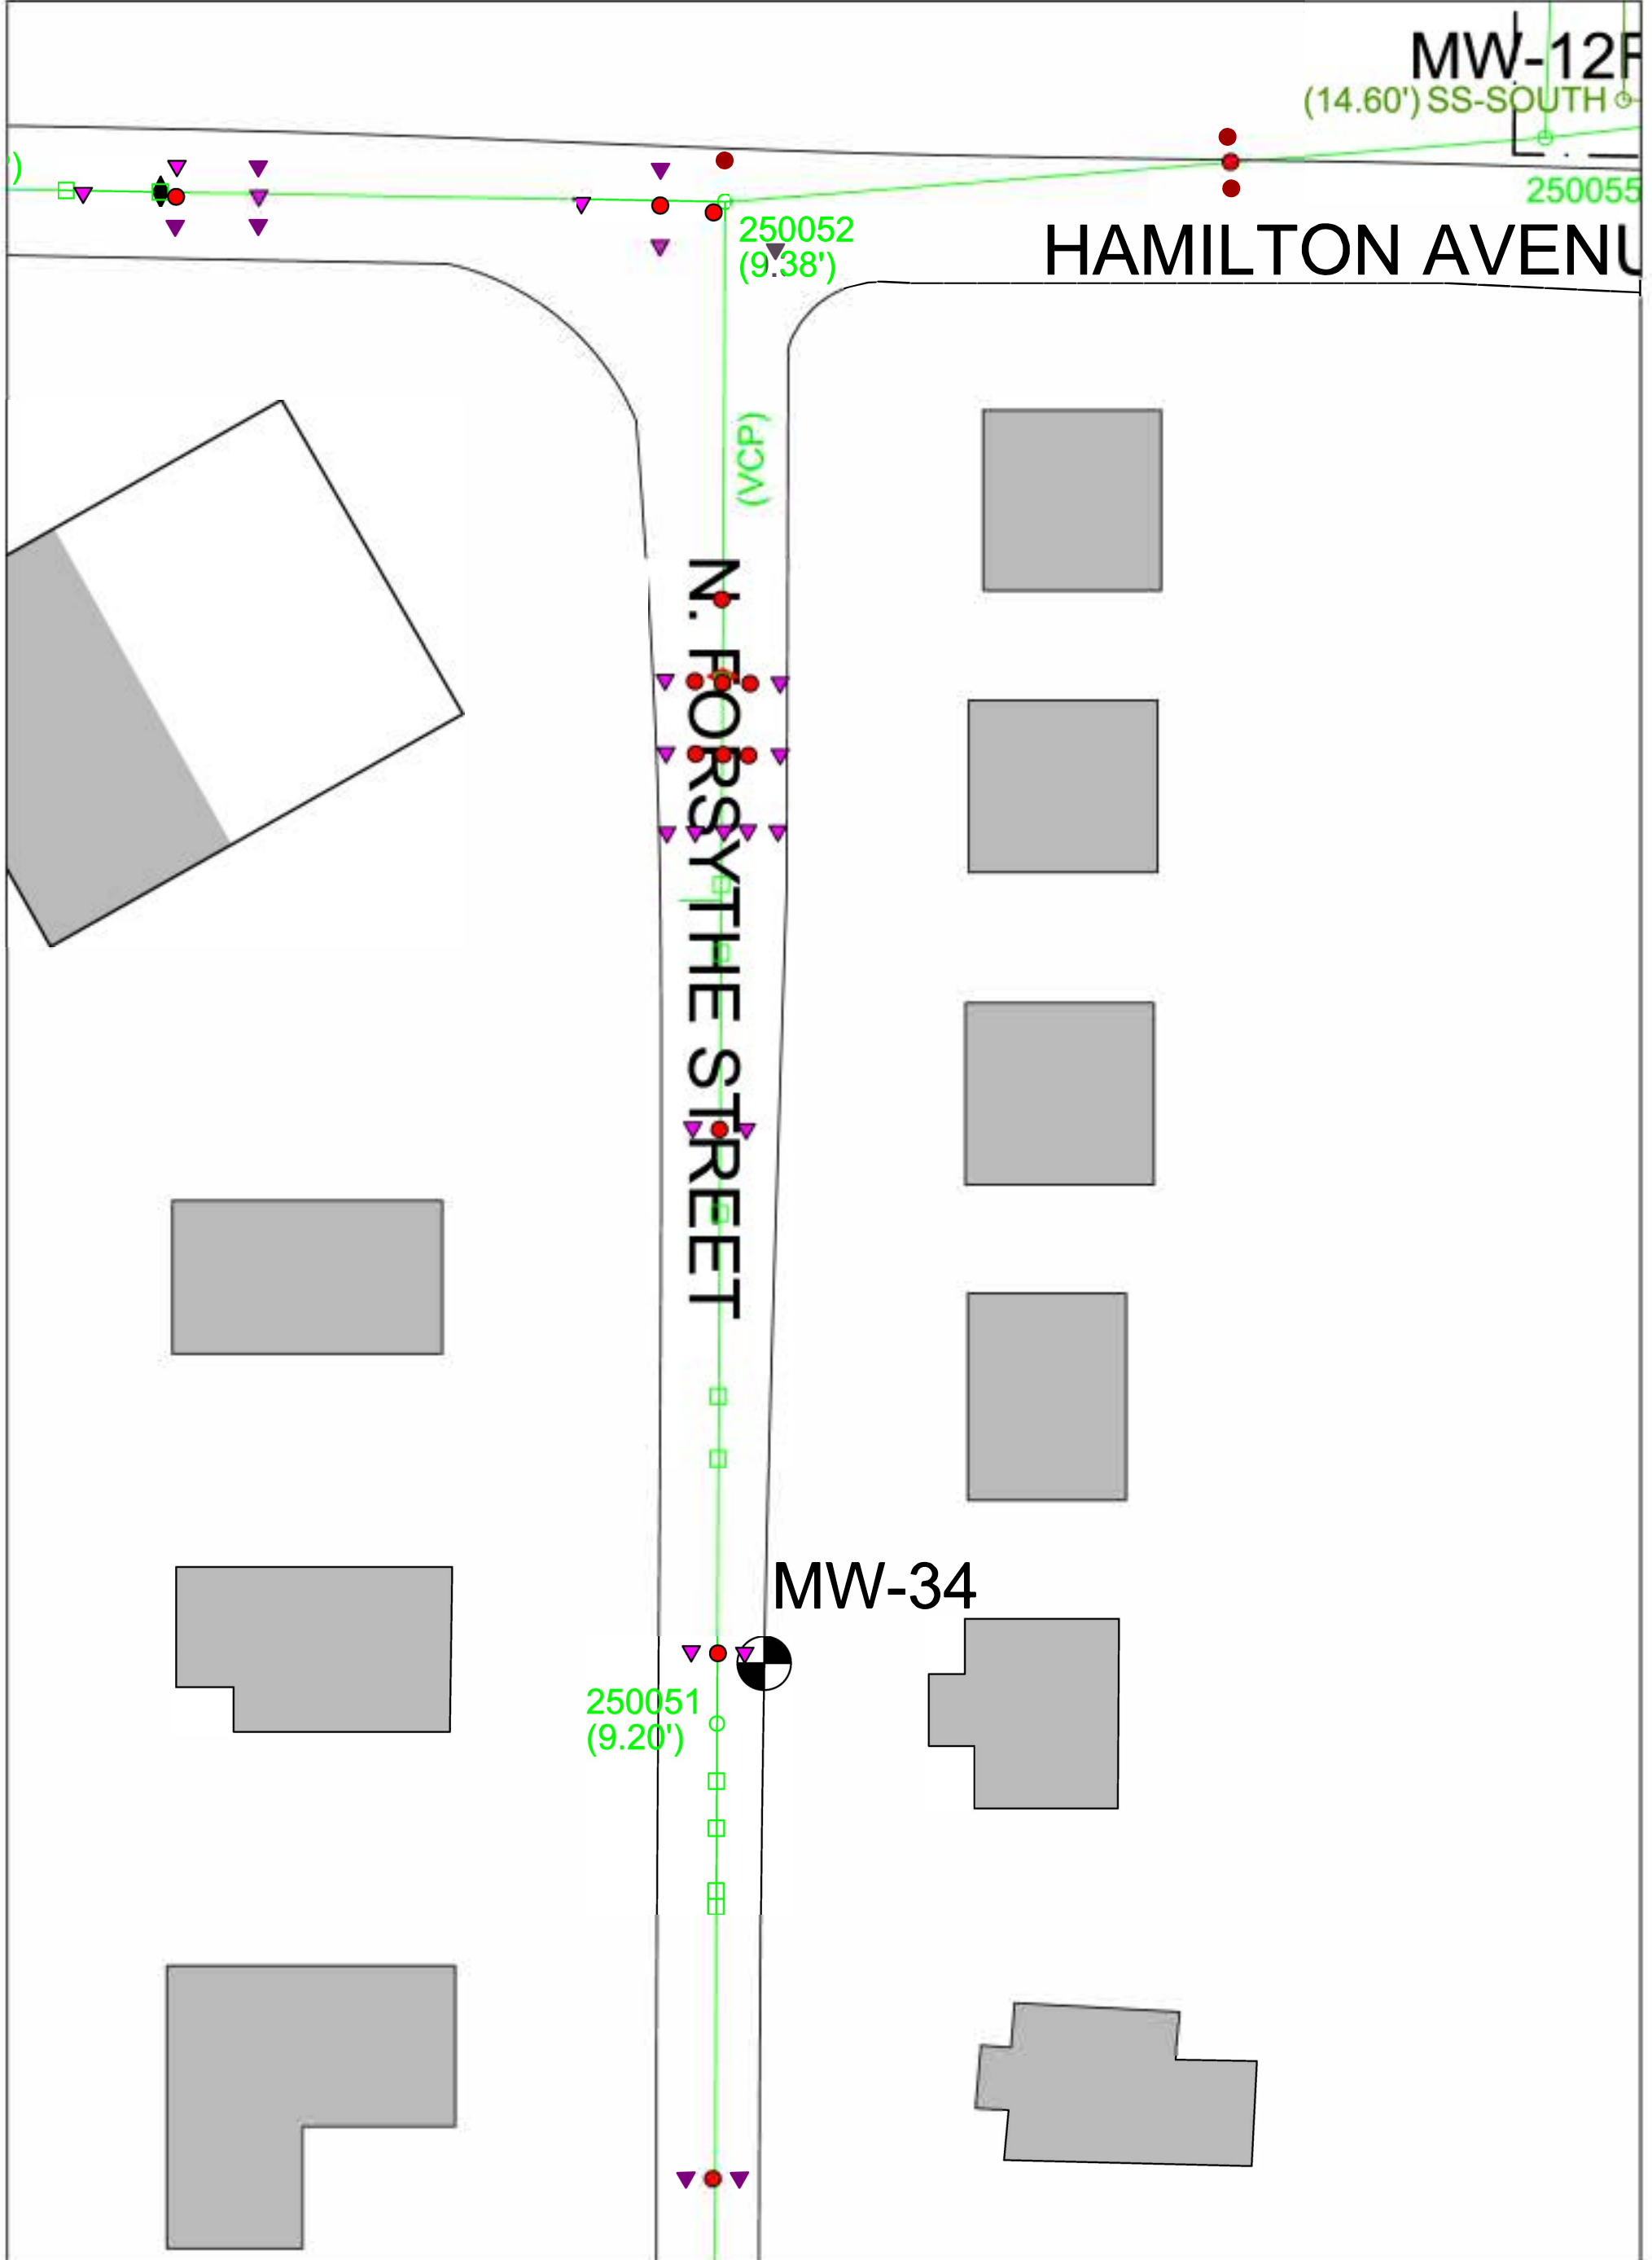

LEGEND ABANDONED MONITORING WELL MONITORING WELL RECOVERY WELL SANITARY SEWER MANHOLE STORM SEWER MANHOLE (SEWER MAIN INVERT DEPTH AT MANHOLE IN FEET)		PROPERTY LINE (APPROXIMATE) STORM SEWER SANITARY SEWER O/H POWER	RESIDENTIAL HOME * DETACHED GARAGES & SHEDS NOT SHOWN NON-RESIDENTIAL STRUCTURE PRIMARY BUILDING WALLS	(VCP) VITREOUS CLAY PIPE SEWER LINE BREAK SEWER LINE CRACK SEWER MATERIAL CHANGE <small>* SEWER INFORMATION OBTAINED FROM 2015 SEWER VIDEO LOG FOR FRANKLIN DPW.</small>	PROPOSED SOIL BORING LOCATION PROPOSED SECONDARY SOIL BORING LOCATION
---	--	---	---	--	--

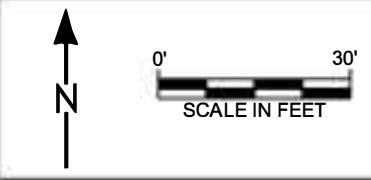


DRAWN BY: L. STRUM
 DATE: 9/27/99
 REVISED: 01/23/2019
 HWP# #111291-01
 DWG. NO. 111291S1


FIGURE 2
 UPPER FORSYTHE ST.
 SOIL BORING LOCATION MAP

FORMER AMPHENOL RFI/CMS
 980 HURRICANE ROAD
 FRANKLIN, INDIANA



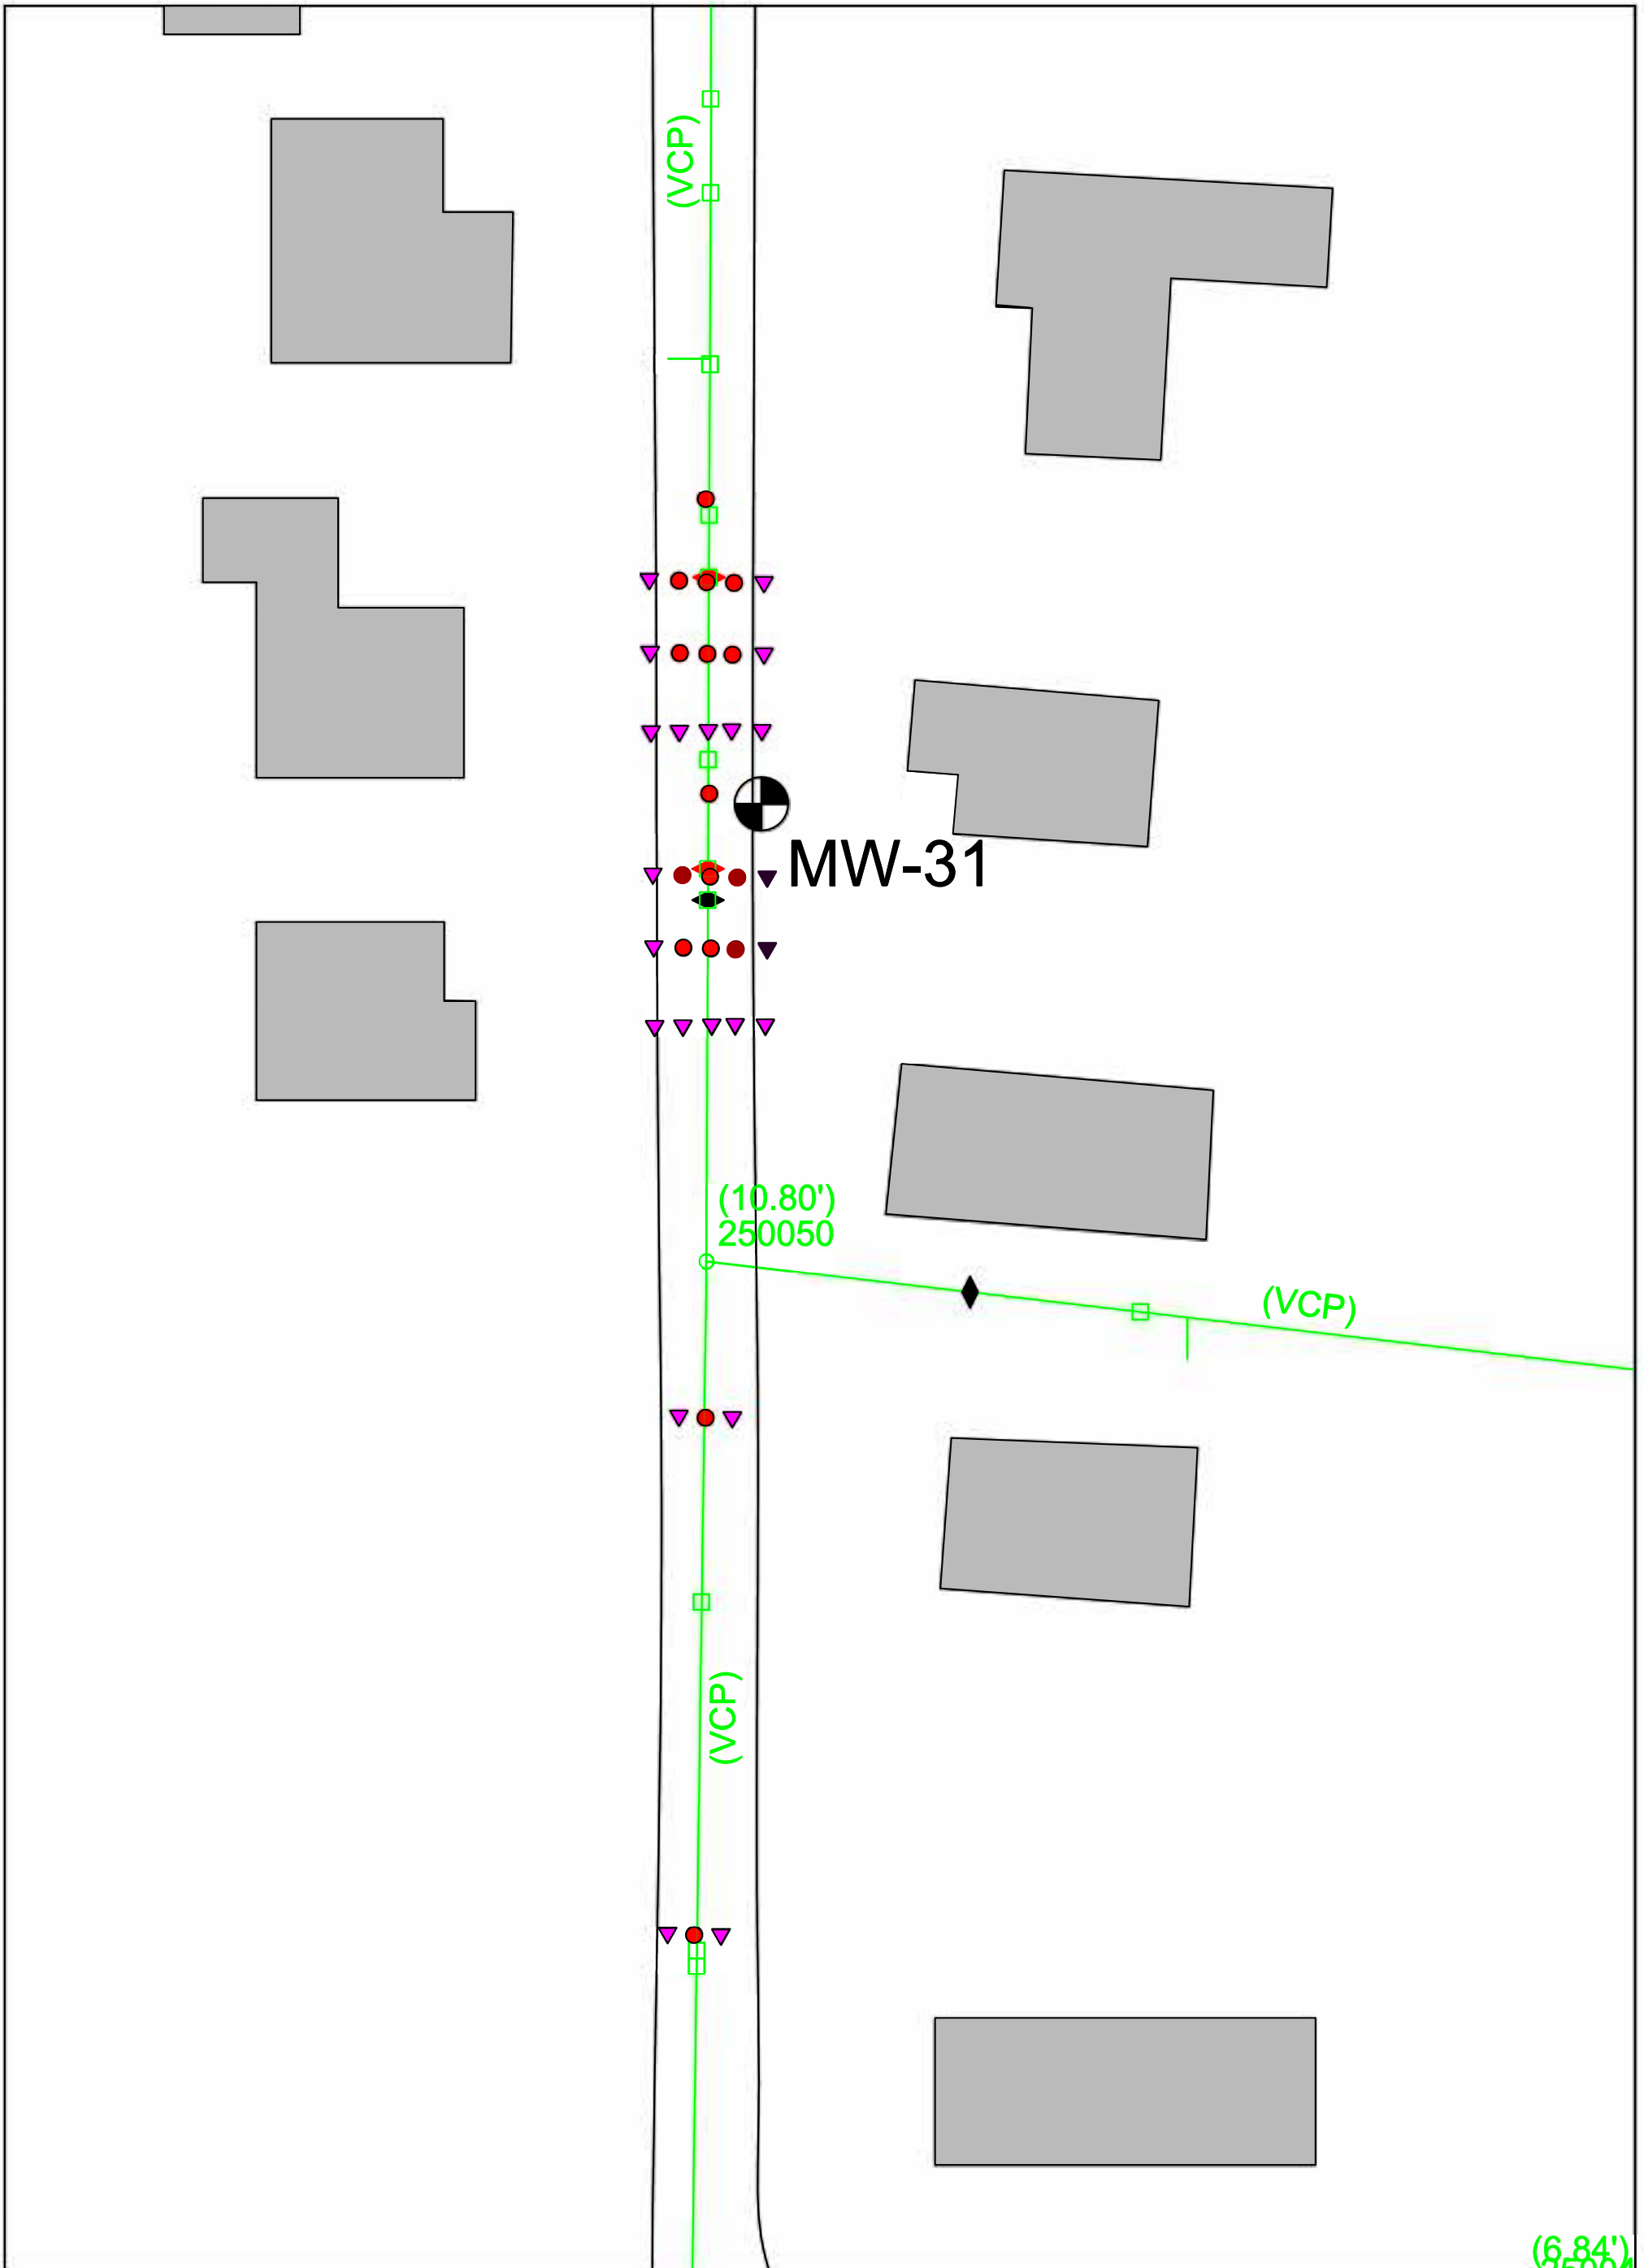


LEGEND ABANDONED MONITORING WELL MONITORING WELL RECOVERY WELL SANITARY SEWER MANHOLE STORM SEWER MANHOLE (SEWER MAIN INVERT DEPTH AT MANHOLE IN FEET)		PROPERTY LINE (APPROXIMATE) STORM SEWER SANITARY SEWER O/H POWER		RESIDENTIAL HOME <small>* DETACHED GARAGES & SHEDS NOT SHOWN</small> NON-RESIDENTIAL STRUCTURE PRIMARY BUILDING WALLS		(VCP) VITREOUS CLAY PIPE SEWER LINE BREAK SEWER LINE CRACK SEWER MATERIAL CHANGE <small>* SEWER INFORMATION OBTAINED FROM 2015 SEWER VIDEO LOG FOR FRANKLIN DPW.</small>		PROPOSED SOIL BORING LOCATION PROPOSED SECONDARY SOIL BORING LOCATION	
 SCALE IN FEET		DRAWN BY: L. STRUM DATE: 9/27/99 REVISED: 01/23/2019 HWP# #111291-01 DWG. NO. 111291S1		FIGURE 3 UPPER-MIDDLE FORSYTHE ST. SOIL BORING LOCATION MAP		FORMER AMPHENOL RFI/CMS 980 HURRICANE ROAD FRANKLIN, INDIANA			

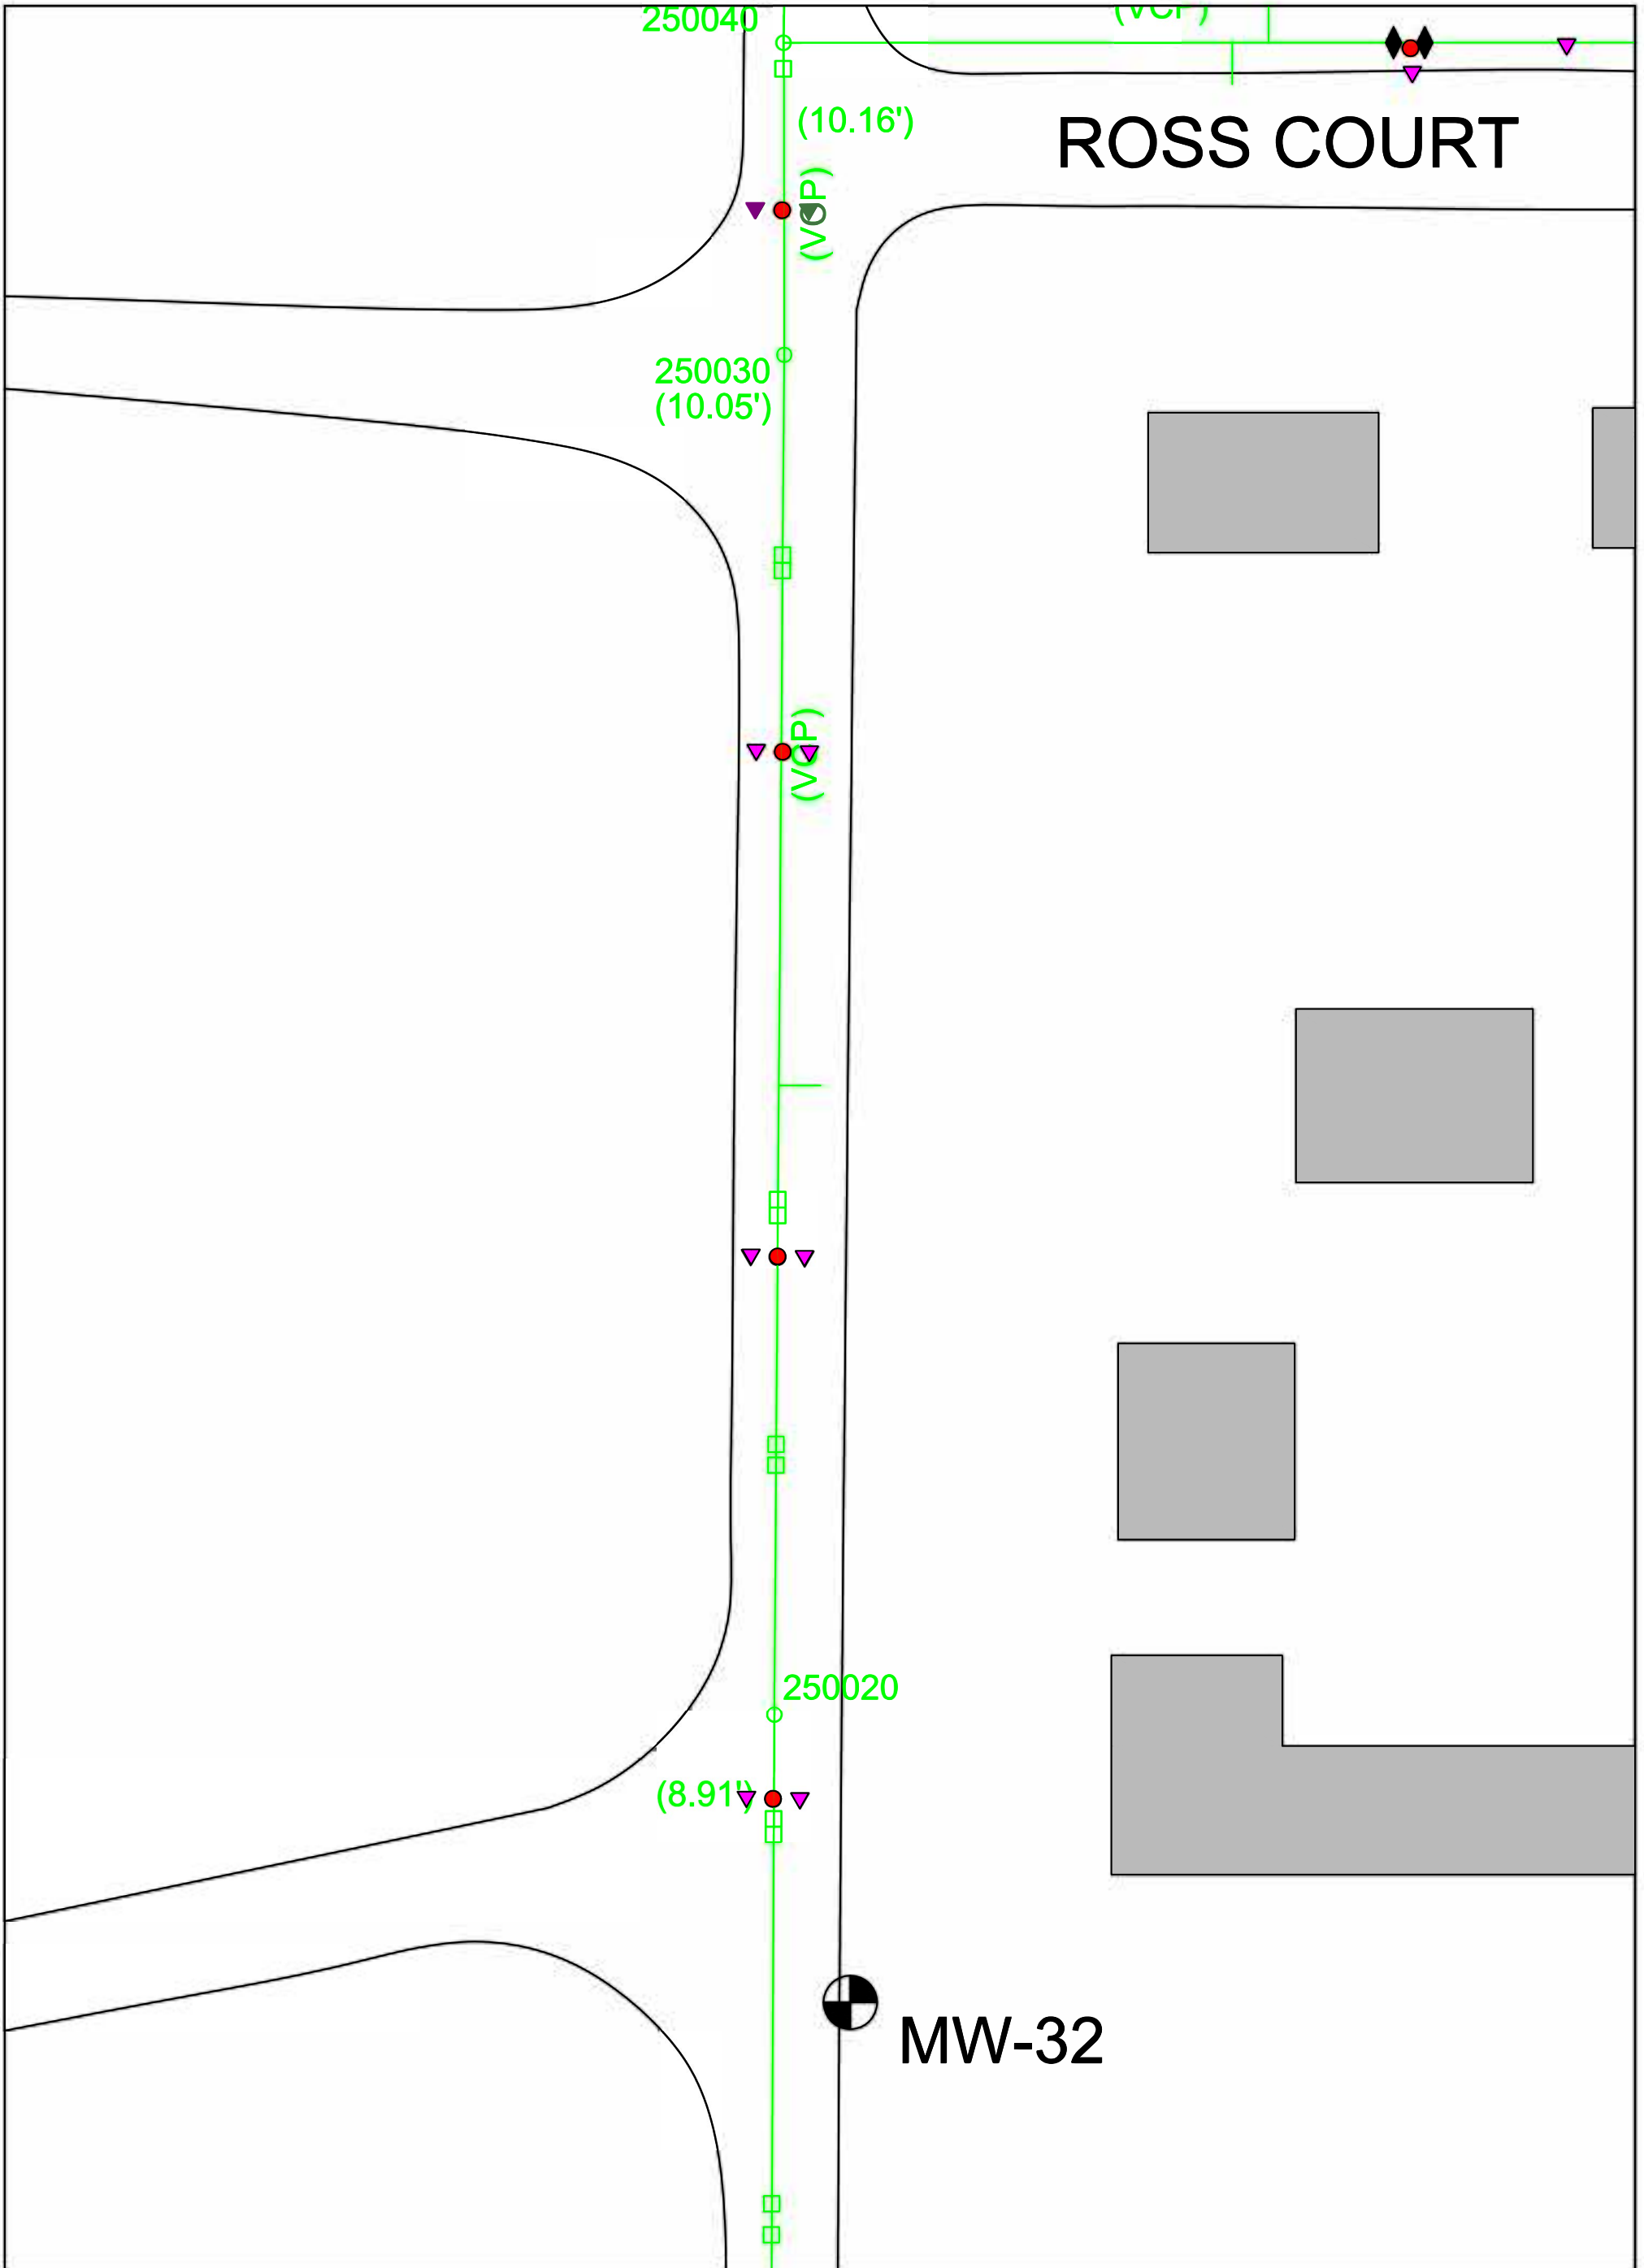

LEGEND ABANDONED MONITORING WELL MONITORING WELL RECOVERY WELL SANITARY SEWER MANHOLE STORM SEWER MANHOLE (SEWER MAIN INVERT DEPTH AT MANHOLE IN FEET)		PROPERTY LINE (APPROXIMATE) STORM SEWER SANITARY SEWER O/H POWER		RESIDENTIAL HOME <small>* DETACHED GARAGES & SHEDS NOT SHOWN</small> NON-RESIDENTIAL STRUCTURE PRIMARY BUILDING WALLS		(VCP) VITREOUS CLAY PIPE SEWER LINE BREAK SEWER LINE CRACK SEWER MATERIAL CHANGE <small>* SEWER INFORMATION OBTAINED FROM 2015 SEWER VIDEO LOG FOR FRANKLIN DPW.</small>		PROPOSED SOIL BORING LOCATION PROPOSED SECONDARY SOIL BORING LOCATION	
 SCALE IN FEET		DRAWN BY: L. STRUM DATE: 9/27/99 REVISED: 01/23/2019 HWP# #111291-01 DWG. NO. 111291S1		FIGURE 4 LOWER-MIDDLE FORSYTHE ST. SOIL BORING LOCATION MAP		FORMER AMPHENOL RFI/CMS 980 HURRICANE ROAD FRANKLIN, INDIANA			



MW-32

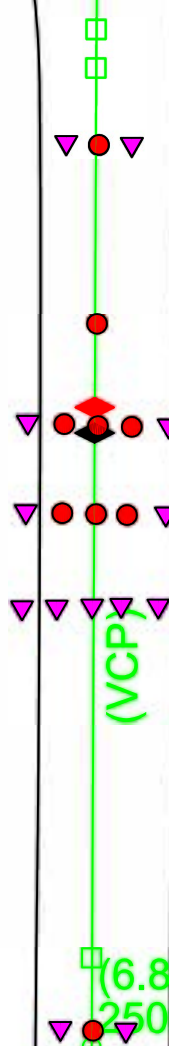

N. FORSYTHE STREET

HURRICANE CREEK

POWER

LEGEND

- ABANDONED MONITORING WELL
- MONITORING WELL
- RECOVERY WELL
- SANITARY SEWER MANHOLE
- STORM SEWER MANHOLE (SEWER MAIN INVERT DEPTH AT MANHOLE IN FEET)
- PROPERTY LINE (APPROXIMATE)
- STORM SEWER
- SANITARY SEWER
- O/H POWER
- RESIDENTIAL HOME * DETACHED GARAGES & SHEDS NOT SHOWN
- NON-RESIDENTIAL STRUCTURE
- PRIMARY BUILDING WALLS
- (VCP) VITREOUS CLAY PIPE
- SEWER LINE BREAK
- SEWER LINE CRACK
- SEWER MATERIAL CHANGE
- PROPOSED SOIL BORING LOCATION
- PROPOSED SECONDARY SOIL BORING LOCATION

* SEWER INFORMATION OBTAINED FROM 2015 SEWER VIDEO LOG FOR FRANKLIN DPW.




DRAWN BY: L. STRUM
 DATE: 9/27/99
 REVISED: 01/23/2019
 HWSA #111291-01
 DWG. NO. 111291S1

FIGURE 5
 LOWER FORSYTHE ST.
 SOIL BORING LOCATION MAP

FORMER AMPHENOL RFI/CMS
 980 HURRICANE ROAD
 FRANKLIN, INDIANA



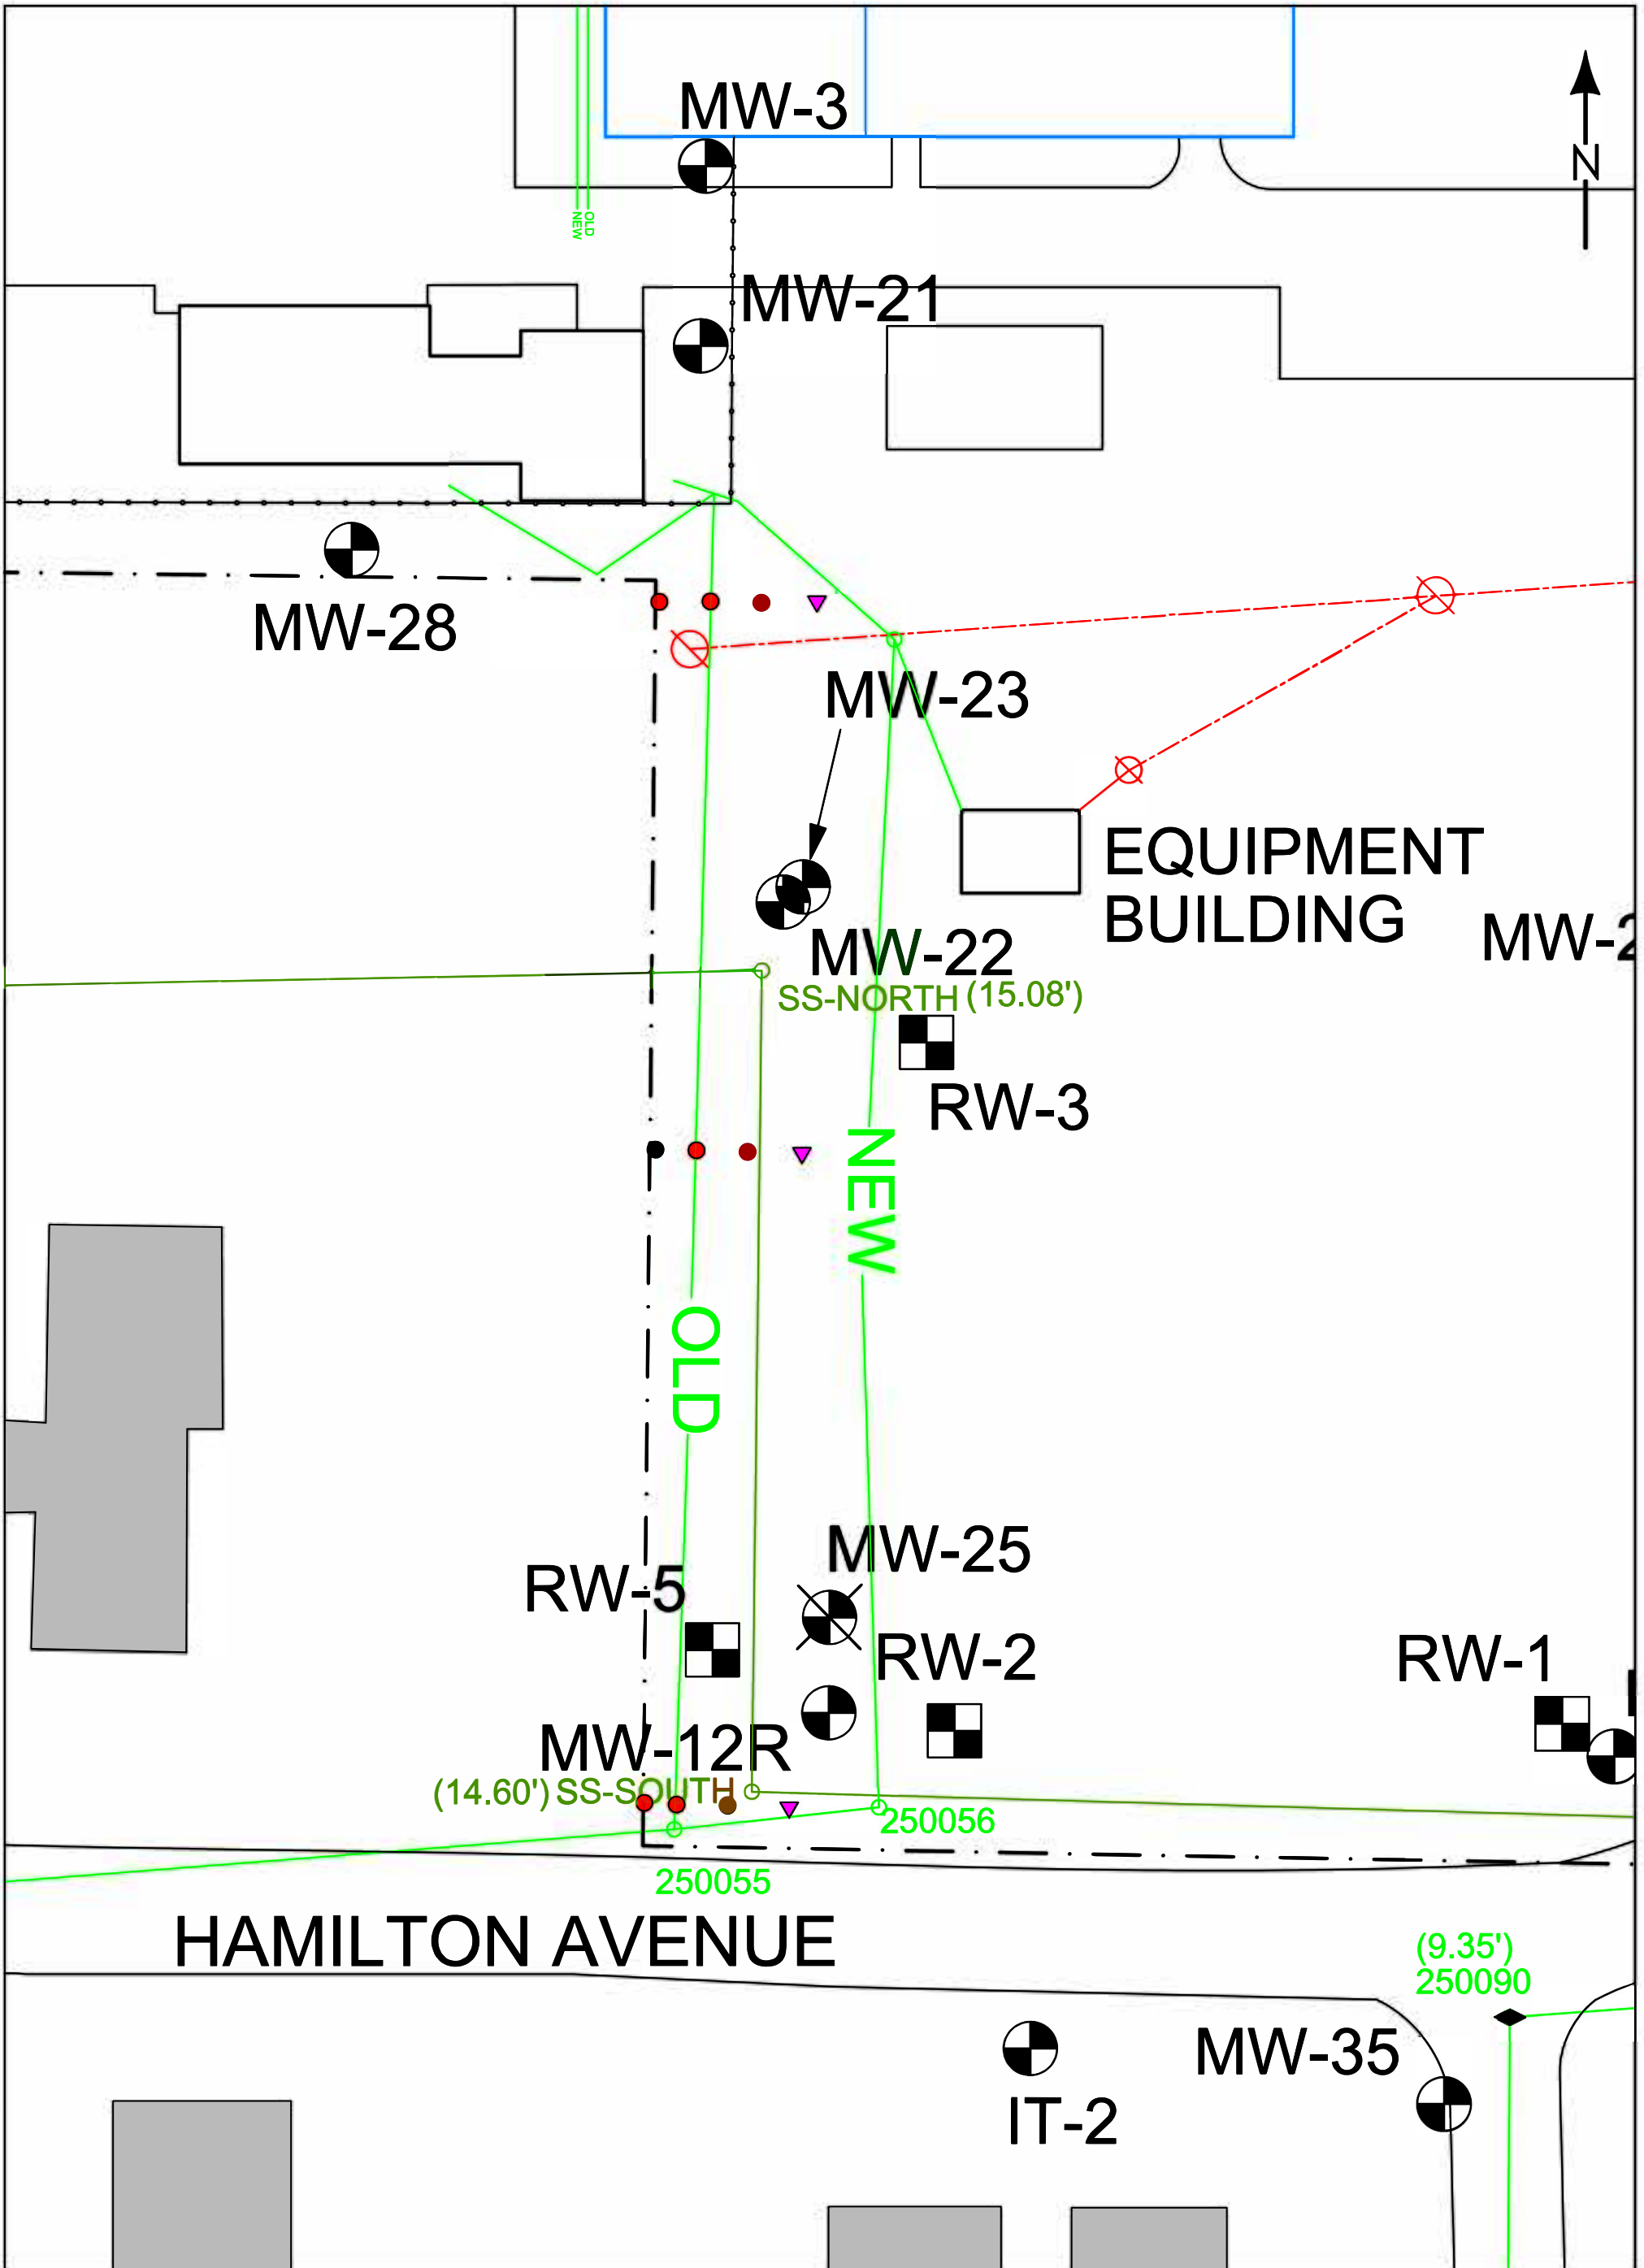

LEGEND ABANDONED MONITORING WELL MONITORING WELL RECOVERY WELL SANITARY SEWER MANHOLE STORM SEWER MANHOLE <small>(SEWER MAIN INVERT DEPTH AT MANHOLE IN FEET)</small>	PROPERTY LINE (APPROXIMATE) STORM SEWER SANITARY SEWER O/H POWER	RESIDENTIAL HOME <small>* DETACHED GARAGES & SHEDS NOT SHOWN</small> NON-RESIDENTIAL STRUCTURE PRIMARY BUILDING WALLS	(VCP) VITREOUS CLAY PIPE SEWER LINE BREAK SEWER LINE CRACK SEWER MATERIAL CHANGE <small>* SEWER INFORMATION OBTAINED FROM 2015 SEWER VIDEO LOG FOR FRANKLIN DPW.</small>	PROPOSED SOIL BORING LOCATION PROPOSED SECONDARY SOIL BORING LOCATION
	SCALE IN FEET 0' 30'	DRAWN BY: L. STRUM DATE: 9/27/99 REVISED: 02/11/2019 HHPA #111291-01 DWG. NO. 111291S1	FIGURE 6 ONSITE PROPOSED BORING LOCATION MAP	FORMER AMPHENOL RFI/CMS 980 HURRICANE ROAD FRANKLIN, INDIANA

Attachments

Attachment A

USEPA Letter Dated December 11, 2018



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
REGION 5
77 WEST JACKSON BOULEVARD
CHICAGO, IL 60604-3590

REPLY TO THE ATTENTION OF

LU-16J

Via E-mail and Certified Mail 7009 1680 0000 7671 1777
RETURN RECEIPT REQUESTED

December 11, 2018

Mr. Joseph M. Bianchi
Group EHS Manager
Amphenol Corporation
40-60 Delaware Avenue
Sidney, NY 13838

Mr. Matt Kupcak
Director, Global Environmental Programs
BorgWarner Inc.
3850 Hamlin Road
Auburn Hills, MI 48326

Subject: Franklin Power Products, Inc./Amphenol Corporation
Request for Off-Site Interim Measure Work Plan
Administrative Order on Consent, Docket # R8H-5-99-002
EPA ID# IND 044 587 848

Dear Mr. Bianchi and Mr. Kupcak:

Under Section VIII, Paragraph N (Additional Work) of the RCRA 3008(h) Administrative Order on Consent dated November 24, 1998 (Order), EPA has determined that Respondents Amphenol Corporation and Franklin Power Products, Inc. (FPP/Amphenol) must perform Additional Work at the facility at 980 Hurricane Road in Franklin, Indiana ("Facility" or "Site"). The Additional Work described in this letter is necessary to meet the purposes of the Order, including but not limited to, assuring the selected corrective measures address the actual and potential threats to human health and the environment presented by the actual and potential releases of hazardous wastes or hazardous constituents at or from the Facility.

Recent environmental media sampling along North Forsythe St. and portions of Hamilton Ave., Ross Court, and Glendale Dr. south of the former Amphenol Corp. facility identified significantly elevated levels of volatile organic compound (VOC) vapors in sewer bedding soil, street rights-of-way soil, sewers, and VOC contamination of groundwater. VOC concentrations are elevated above vapor intrusion risk-based screening levels; groundwater is also elevated above maximum contaminant levels.

Amphenol Corporation (Amphenol) has indicated its intent to perform an interim measure (IM) remedy to address residual off-Site contamination in the neighborhood south of the Facility, referred to as the Study Area in Corrective Action documents for this Site. Amphenol described the proposed remedy conceptually to EPA as the removal of contaminated media around the sewer system and replacement of sewers along a portion of North Forsythe St. to eliminate or mitigate risk of vapor intrusion. However, it is unclear that off-Site contaminated media needing remediation is confined to North Forsythe St. Additional sampling is needed to identify the areal extent to be covered by the remedial design plan. This letter requests that Amphenol submit a detailed remedial design work plan ("work plan") including such sampling for EPA approval. Upon approval, EPA will require that Amphenol begin work as soon as possible.

The purpose of the sampling in the neighborhood south of the Facility was to determine the condition of historically contaminated off-site environmental media in the Study Area, and whether residual VOC contaminated media exceeded risk-based residential screening values. The sampling was also performed to assess the extent of off-Site impacts. However, the investigation was not comprehensive, and the complete extent of off-Site impacts was not determined. The sample results are being used to identify buildings, primarily homes, needing indoor air vapor intrusion sampling. To date, of the subset of homes sampled, some have sub-slab and indoor air VOC levels above IDEM Risk-based Closure Levels and need sub-slab vapor depressurization systems and other remedial measures, underscoring the need for remediation of impacted media.

Summary of Requested Work

Amphenol Corp must prepare and submit a work plan to EPA that describes its proposed approach to interim measures to address off-Site contaminated environmental media. The work plan must include proposed risk-based Corrective Action objectives for incorporation into the remedial design.

The work plan must include, but not be limited to, the elements described below.

- 1) Design-level data Insufficient information is currently available to design the remedy. Amphenol must collect design-level information, including sampling to establish the proposed vertical, horizontal, eastern/western and southern extent of the remedial area. The work plan must propose the approach to delineating the extent of VOC-impacted media, including field and analytical methods. The impacted media to be analyzed includes sewer bedding soil, street rights-of-way

soil, and groundwater. Data collection may include sampling on residential and other private properties.

Amphenol may prepare and submit a sampling plan to collect design-level data to EPA in advance of the final proposed work plan. Data from the sampling event must be provided to EPA upon receipt and third-party validation. EPA will then determine whether additional characterization is required to determine the remedial extent or to refine the remedial design elements.

- 2) Corrective Action Objectives Amphenol must propose risk-based Corrective Action Objectives (CAOs) for each medium and incorporate these into the remedial design. For example, because contaminated soil is a source of contamination to groundwater, the CAO for soil should meet groundwater protection standards and the CAO for groundwater should include MCLs and VISLs. The CAOs will be used along with confirmation sampling data following cleanup to verify whether the IM is complete.
- 3) Construction Design Amphenol must provide a complete description of construction design for all phases of the remediation, including engineering design drawings, waste disposal characterization data and profiles, and comprehensive documentation of instructions to contractors. All planned restoration must be included and clean backfill is required. In addition, as-built drawings are required upon completion of construction for EPA review and approval.
- 4) Materials Management Plan (MMP) Amphenol must include a MMP for all contaminated materials to be excavated and handled that require proper disposal in accordance with local, State, and Federal regulations based on waste classification. The MMP must include a plan for handling any non-aqueous phase liquids encountered.
- 5) Best Management Practices (BMPs) Amphenol must incorporate BMPs into the construction plan, including the monitoring and controlling releases of VOC vapors and fugitive dust, and other BMPs such as erosion control. Details such as an air monitoring plan with contingency measures must be included.
- 6) Storm Water Pollution Prevention Plan (SWPPP) Amphenol must prepare and submit a SWPPP to IDEM and obtain a permit for Storm Water Discharges from Construction Site Activities. EPA must be copied on the proposed plan.

- 7) Permits The work plan must include a list of permits needed and obtained, including for excavation and traffic control. All needed permits must be obtained prior to mobilization to the Site.
- 8) Access The work plan must include access needs and Amphenol's plan to obtain access.
- 9) Public notification The work plan must include how the public will be notified of work including schedules, and whether sewer connections will be interrupted and the plan for accommodating households during periods of interruption. The plan should include a description of how Amphenol will coordinate with the City of Franklin.
- 10) Confirmation sampling Following removal, Amphenol must perform confirmation sampling to verify that the excavation limits are consistent with the CAOs.
- 11) Existing Structures and Utilities The plan must include measures for protection and/or replacement of existing structures and property, including utility infrastructure, driveways, sidewalks, yards, trees, etc.
- 12) Health and Safety Plan (HSP) The work plan must include a HSP that covers controlling potential exposures in the neighborhood, hazardous materials training requirements of contractors, and a traffic safety plan.
- 13) Schedule The plan must include a proposed schedule of all activities.

Quality Assurance

Previously approved quality assurance (QA) measures may be referenced in the work plan; references must be explicit. New QA measures must be proposed in the work plan. Please refer to EPA's QAR-5, *EPA Requirements for Quality Assurance Project Plans* (EPA 2001) found at https://www.epa.gov/sites/production/files/2016-06/documents/r5-final_0.pdf. All samples must be analyzed by a laboratory with appropriate ELAP certification, as specified in the guidance. Please also refer to *Guidance for Quality Assurance Project Plans*, EPA QA/G-5 (EPA 2002) when developing the QA/Quality Control portions of the Work Plan.

By January 25, 2019, EPA requests that you submit an Off-Site Interim Measure Remedial Design Work Plan as described above.

If you have any questions, please contact me at (312) 886-3020.

Sincerely,



Carolyn Bury
Project Manager
Corrective Action Section 2
Remediation and Re-use Branch

ecc: Brad Gentry, IWM Consulting Group, LLC.
Don Stilz, IDEM
Bhooma Sundar, RRB CAS2
Conor Neal, RRB CAS2
Motria Caudill, ATSDR

Attachment B

IWM Consulting SOPs

SOP Group G

Standard Operating Procedures for Soil Sampling

TABLE OF CONTENTS

<u>INTRODUCTION</u>	1
<u>SOP G.1 METHOD SUMMARY</u>	1
<u>SOP G.2 SAMPLING PRESERVATION, CONTAINERS, HANDLING AND STORAGE</u>	1
<u>SOP G.3 INTERFERENCE AND POTENTIAL PROBLEMS</u>	1
<u>SOP G.4 EQUIPMENT</u>	2
<u>SOP G.5 REAGENTS</u>	2
<u>SOP G.6 PROCEDURES</u>	3
<i>G.6.1 PREPERATION</i>	3
<i>G.6.2 SAMPLE COLLECTION</i>	3
<i>G.6.2.1 Surface Soil Samples</i>	3
<i>G.6.2.2 Sampling at Depth with Augers</i>	4
<i>G.6.2.3 Sampling at Depth with a Split Spoon (Barrel) Sampler</i>	6
<i>G.6.2.4 Sampling at Depth Using a Direct-Push Sampler</i>	7
<i>G.6.2.4 Test Pit/Trench Excavation</i>	8
<i>G.6.2.5 Terra Core Sampler - VOC Soil Sample Collection</i>	9
<i>G.6.2.6 Non-VOC Soil Sample Collection</i>	11
<u>SOP G.7 QUALITY ASSURANCE/QUALITY CONTROL</u>	12
<u>SOP G.8 HEALTH AND SAFETY</u>	12
<u>SOP G.9 REFERENCES</u>	12

SOP Group G

Standard Operating Procedures for Soil Sampling

Introduction

The purpose of this standard operating procedure (SOP) is to describe the procedures for the collection of representative soil samples. Analysis of soil samples may determine whether concentrations of specific pollutants exceed established action levels, or if the concentrations of pollutants present a risk to public health, welfare, or the environment.

These are standard (i.e., typically applicable) operating procedures which may be varied or changed as required, dependent upon site conditions, equipment limitations or limitations imposed by the procedure. In all instances, the actual procedures used should be documented and described in an appropriate site report. Mention of trade names or commercial products does not constitute an endorsement or recommendation for use.

SOP G.1 Method Summary

Soil samples may be collected using a variety of methods and equipment depending on the depth of the desired sample, the type of sample required (disturbed vs. undisturbed), and the soil type. Near-surface soils may be easily sampled by hand or using a spade, trowel, or scoop. Sampling at greater depths may be performed using a hand auger, continuous flight auger, a split-spoon, or, if required, a drill rig, direct-push sampler or, a backhoe or excavator bucket.

SOP G.2 Sampling Preservation, Containers, Handling and Storage

Chemical preservation of solids is based on analytical method requirements. Samples should be cooled and protected from sunlight to minimize any potential reaction. The amount of sample to be collected, proper sample container type and preservative are discussed in SOP Group H.

SOP G.3 Interference and Potential Problems

There are two primary potential problems associated with soil sampling - cross contamination of samples and improper sample collection. Cross contamination problems can be eliminated or minimized through the use of dedicated sampling equipment. If this is not possible or practical, then decontamination of sampling equipment is necessary. Improper sample collection can involve using contaminated equipment, disturbance of the

matrix resulting in compaction of the sample, or inadequate homogenization of the samples where required, resulting in variable, non-representative results.

SOP G.4 Equipment

Typical soil sampling equipment includes some or all of the following:

- Maps/plot plan
- Safety equipment (including PPE), as specified in the site-specific Health and Safety Plan
- Survey equipment or global positioning system (GPS) to locate sampling points
- Tape measure
- Survey stakes or flags
- Camera and film
- Stainless steel, plastic, or other appropriate homogenization bucket, bowl or pan
- Appropriate size sample containers
- Ziplock plastic bags
- Site logbook
- Labels
- Chain of Custody records and custody seals
- Field data sheets and sample labels
- Cooler(s)
- Ice
- Decontamination supplies/equipment
- Canvas or plastic sheet
- Spade or shovel
- Spatula
- Scoop
- Plastic or stainless steel spoons
- Trowel(s)
- Continuous flight (screw) auger
- Bucket auger
- Post hole auger
- Extension rods
- T-handle
- Sampling trier
- Thin wall tube sampler
- Drill rig or direct-push sampler
- Split spoons
- Vehimeyer soil sampler outfit
- Backhoe

SOP G.5 Reagents

When obtaining soil samples for VOC analysis, the soil samples must be obtained in accordance with Sampling Method 5035. Consequently, Terra Core™ sampling Kits will need to be utilized during the sampling activities. The Terra Core™ Sampling Kits include two pre-weighed (tared) and labeled 40-mL VOA glass vial containing a magnetic stir bar and 5-mL of reagent (distilled) water. These containers will be utilized for low level VOC samples. The kits also include one pre-weighed and labeled 40-mL VOA glass vial containing 5-mL of MeOH for medium to high level VOC samples. Avoid splashing any preservative, if present, out of the sample container by holding the container at an angle while slowly extruding the soil core into the sample container. Do not immerse the sampling device into the preservative.

Reagents are not typically used for the preservation of non-volatile soil samples.

SOP G.6 Procedures

G.6.1 Preparation

Determine the extent of the sampling effort, the sampling methods to be employed, and the types and amounts of equipment and supplies required.

Obtain project-specific sampling objectives from the Project Manager.

Obtain necessary sampling and monitoring equipment.

Decontaminate or pre-clean equipment, and ensure that it is in working order.

Prepare schedules and coordinate with staff, client, and regulatory agencies, if appropriate.

Perform a general site survey prior to site entry in accordance with the site specific Health and Safety Plan.

Use stakes, flagging, or spray paint to identify and mark all sampling locations. Specific site factors, including extent and nature of contaminant, should be considered when selecting sample location. If required, the proposed locations may be adjusted based on site access, property boundaries, utilities, and surface obstructions. All staked locations should be utility-cleared by the property owner or the Field Team Leader prior to soil sampling; and utility clearance should always be confirmed before beginning work.

G.6.2 Sample Collection

G.6.2.1 Surface Soil Samples

Collection of samples from near-surface soil can be accomplished with tools such as spades, shovels, trowels, and scoops. Surface material is removed to the required depth and a stainless steel or plastic scoop is then used to collect the sample.

This method can be used in most soil types but is limited to sampling at or near the ground surface. Accurate, representative samples can be collected with this procedure depending on the care and precision demonstrated by the sample team member. A flat, pointed mason trowel to cut a block of the desired soil is helpful when undisturbed profiles are required. Tools plated with chrome or other materials should not be used. Plating is particularly common with garden implements such as potting trowels.

The following procedure is used to collect surface soil samples:

Carefully remove the top layer of soil or debris to the desired sample depth with a pre-cleaned spade.

Using a pre-cleaned, stainless steel scoop, plastic spoon, or trowel, remove and discard a thin layer of soil from the area which came in contact with the spade.

If volatile organic analysis is to be performed, transfer the sample directly into an appropriate, labeled sample container using a T-handle sampler in accordance with sampling Method 5035. This procedure is discussed in more detail in Section G.6.2.6 of this SOP. The VOC samples must be first set of sample containers filled during the sampling event. If additional non-volatile sampling parameters are required, mix the remaining soil well and fill the sampling containers in a manner that allows for the most volatile samples (i.e. SVOCs) to be obtained first, followed by less volatile samples (i.e. metals or PCBs). If a composite soil sample is required across one particular sampling interval, place the remainder of the sample into a stainless steel, plastic, dedicated sealable bag, or other appropriate homogenization container, and mix thoroughly to obtain a homogenous sample representative of the entire sampling interval. Then, place the sample into appropriate, labeled containers and secure the caps tightly. If composite samples are to be collected from more than one sampling interval or location, place a sample from another sampling interval or location into the homogenization container and mix thoroughly. When compositing is complete, place the sample into appropriate, labeled containers and secure the caps tightly.

G.6.2.2 Sampling at Depth with Augers

This system consists of an auger and a series of extensions, and a "T" handle. The auger is used to bore a hole to a desired sampling depth, and is then withdrawn. The sample may be collected directly from the auger. The system is then lowered down the borehole, and

driven into the soil to the completion depth. The system is withdrawn and the sample is collected from within the auger bucket.

Several types of augers are available; these include: bucket type, continuous flight (screw), and post-hole augers. Bucket type augers are better for direct sample recovery because they provide a large volume of sample in a short time. When continuous flight augers are used, the sample can be collected directly from the flights. The continuous flight augers are satisfactory when a composite of the complete soil column is desired. Post-hole augers have limited utility for sample collection as they are designed to cut through fibrous, rooted, swampy soil and cannot be used below a depth of approximately three feet.

The following procedure is used for collecting soil samples with the auger:

- 1) Attach the auger bit to a drill rod extension, and attach the "T" handle to the drill rod.
- 2) Clear the area to be sampled of any surface debris (e.g., twigs, rocks, litter). It may be advisable to remove the first three to six inches of surface soil for an area approximately six inches in radius around the drilling location.
- 3) Begin augering, periodically removing and depositing accumulated soils onto a plastic sheet spread near the hole. This prevents accidental brushing of loose material back down the borehole when removing the auger or adding drill rods. It also facilitates refilling the hole, and avoids possible contamination of the surrounding area.
- 4) After reaching the desired depth, slowly and carefully remove the auger from the hole. When sampling directly from the auger, collect the sample after the auger is removed from the hole. Without disturbing the soil sample, scan the collected interval (directly from bucket of the auger) using a PID or and FID. Record the findings and lithological description of the soil in the field book.
- 5) **If volatile organic analysis is to be performed, transfer the sample directly into an appropriate, labeled sample container using a T-handle sampler, in accordance with sampling Method 5035. This procedure is discussed in more detail in Section G.6.2.6 of this SOP. The VOC samples must be first set of sample containers filled during the sampling event.** If additional non-volatile sampling parameters are required, mix the remaining soil well and fill the sampling containers in a manner that allows for the most volatile samples (i.e. SVOCs) to be obtained first, followed by less volatile samples (i.e. metals or PCBs). If a composite soil sample is required across one particular sampling interval, place the remainder of the sample into a stainless steel, plastic, dedicated sealable bag, or other appropriate homogenization container, and mix thoroughly to obtain a homogenous sample representative of the entire sampling interval. Then, place the sample into appropriate, labeled containers and secure the caps tightly. If composite samples are to be collected from more than one sampling interval or location, place a sample from another sampling interval or location into the homogenization container and mix thoroughly.

When compositing is complete, place the sample into appropriate, labeled containers and secure the caps tightly.

6) If another sample is to be collected in the same hole, but at a greater depth, remove any excess soil from the auger bucket, and follow steps 3 through 6, making sure to decontaminate the auger and tube sampler between samples.

7) Record any additional information, such as sample depth, location, soil type, etc. Abandon the borehole according to applicable state regulations. Generally, shallow excavations can simply be backfilled with bentonite and capped at the surface with like material (i.e. topsoil, gravel, pavement, or concrete).

G.6.2.3 Sampling at Depth with a Split Spoon (Barrel) Sampler

Split spoon sampling is generally used to collect undisturbed soil cores of 18 or 24 inches in length. A series of consecutive cores may be extracted with a split spoon sampler to give a complete soil column profile, or an auger may be used to drill down to the desired depth for sampling. The split spoon is then driven to its sampling depth through the bottom of the augured hole and the core extracted.

When split spoon sampling is performed to gain geologic information, all work should be performed in accordance with ASTM D1586-98, "Standard Test Method for Penetration Test and Split-Barrel Sampling of Soils".

The following procedures are used for collecting soil samples with a split spoon:

- 1) Assemble the sampler by aligning both sides of barrel and then screwing the drive shoe on the bottom and the head piece on top.
- 2) Place the sampler in a perpendicular position on the sample material.
- 3) Using a well ring, drive the tube. Do not drive past the bottom of the head piece or compression of the sample will result.
- 4) Record in the site logbook or on field data sheets the length of the tube used to penetrate the material being sampled, and the number of blows required to obtain this depth.
- 5) Withdraw the sampler, and open by unscrewing the bit and head and splitting the barrel. The amount of recovery and soil type should be recorded on the boring log. If a split sample is desired, a cleaned, stainless steel knife should be used to divide the tube contents in half, longitudinally. This sampler is typically available in 2 and 3 1/2 inch diameters. A larger barrel may be necessary to obtain the required sample volume.

6) Without disturbing the soil sample, scan the collected interval (directly from the split spoon) using a PID or and FID. Record the findings and lithological description of the soil in the field book and select the sample displaying the highest field screen reading, and/or from other areas that indicate the potential for contamination. Be certain to understand the project specific objective and sampling rationale prior to determining your sampling interval.

7) Without disturbing the core, transfer it to appropriate labeled sample container(s) and seal tightly. **If volatile organic analysis is to be performed, transfer the sample directly into an appropriate, labeled sample container using a T-handle sampler in accordance with sampling Method 5035. This procedure is discussed in more detail in Section G.6.2.6 of this SOP. The VOC samples must be first set of sample containers filled during the sampling event.** If additional non-volatile sampling parameters are required, mix the remaining soil well and fill the sampling containers in a manner that allows for the most volatile samples (i.e. SVOCs) to be obtained first, followed by less volatile samples (i.e. metals or PCBs). If a composite soil sample is required across one particular sampling interval, place the remainder of the sample into a stainless steel, plastic, dedicated sealable bag, or other appropriate homogenization container, and mix thoroughly to obtain a homogenous sample representative of the entire sampling interval. Then, place the sample into appropriate, labeled containers and secure the caps tightly. If composite samples are to be collected from more than one sampling interval or location, place a sample from another sampling interval or location into the homogenization container and mix thoroughly. When compositing is complete, place the sample into appropriate, labeled containers and secure the caps tightly.

8) Record any additional information, such as sample depth, location, soil type, etc. Abandon the borehole according to applicable state regulations. Generally, shallow excavations can simply be backfilled with bentonite and capped at the surface with like material (i.e. topsoil, gravel, pavement, or concrete).

G.6.2.4 Sampling at Depth Using a Direct-Push Sampler

Direct-push soil sampling is accomplished using an impact-driven or truck-mounted Geoprobe® or EarthProbe® type drill rig equipped with a probe-drive, soil-sampling system. Soil samples are retrieved by hydraulically driving a sampling probe rod to the desired depth. Depending on the type of system employed, the samplers may either take continuous samples or the probe rod may be used to obtain samples at discrete intervals. The sample remains sealed within an inner clear-PVC sample tube, contained in the sampling probe as it is driven to the desired depth. As the probe is driven through the desired sampling interval, the soil sample is forced upward past a cutting shoe on the end of the drive rod. As the soil passes upwards, it enters a disposable, clear-PVC liner attached to the cutting shoe. Soil samples retrieved in this manner can be characterized for texture, moisture content, color, etc., and selected samples can be retained for laboratory analysis.

The following procedures are used for collecting soil samples with a direct-push sampler:

- 1) After driving the sampler through the sample interval the probe rods and/or sampler is extracted from the borehole.
- 2) The cutting shoe is removed allowing for the removal of the clear-plastic liner containing the sample.
- 3) Place the sampler liner horizontally on a clean working surface (e.g., a plastic table). Record in the site logbook or on field data sheets the length of the sample interval, the sample recovery, and any other pertinent information and observations.
- 4) Utilize a clean, box-cutter style knife blade to open the plastic sampling tube lengthwise.

Note: occasionally some work plans may not call for cutting the sampling tube lengthwise and instead will call for the cutting of one or more perpendicular segments from sampling tube, which will then have the ends capped and sealed with the sample remaining intact and undisturbed within the selected section of sample liner.

- 5) Without disturbing the soil sample, scan the collected interval (directly from acetate liner) using a PID or an FID. Record the findings and lithological description of the soil in the field book and select the sample displaying the highest field screen reading, and/or from other areas that indicate the potential for contamination. Be certain to understand the project specific objective and sampling rationale prior to determining your sampling interval.

6) If volatile organic analysis is to be performed, transfer the sample directly into an appropriate, labeled sample container using a T-handle sampler, in accordance with sampling Method 5035. This procedure is discussed in more detail in Section G.6.2.6 of this SOP. The VOC samples must be first set of sample containers filled during the sampling event. If additional non-volatile sampling parameters are required, mix the remaining soil well and fill the sampling containers in a manner that allows for the most volatile samples (i.e. SVOCs) to be obtained first, followed by less volatile samples (i.e. metals or PCBs). If a composite soil sample is required across one particular sampling interval, place the remainder of the sample into a stainless steel, plastic, dedicated sealable bag, or other appropriate homogenization container, and mix thoroughly to obtain a homogenous sample representative of the entire sampling interval. Then, place the sample into appropriate, labeled containers and secure the caps tightly. If composite samples are to be collected from more than one sampling interval or location, place a sample from another sampling interval or location into the homogenization container and mix thoroughly. When compositing is complete, place the sample into appropriate, labeled containers and secure the caps tightly.

7) Record any additional information, such as sample depth, location, soil type, etc. Abandon the borehole according to applicable state regulations. Generally, shallow excavations can simply be backfilled with bentonite and capped at the surface with like material (i.e. topsoil, gravel, pavement, or concrete).

G.6.2.5 Test Pit/Trench Excavation

A backhoe can be used to remove sections of soil, when detailed examinations of soil characteristics are required.

The following procedures are used for collecting soil samples from test pits or trenches:

- 1) Prior to any excavation with a backhoe, it is important to ensure that all sampling locations are clear of overhead and buried utilities.
- 2) Review the site specific Health & Safety plan and ensure that all safety precautions including appropriate monitoring equipment are installed as required.
- 3) Using the backhoe, excavate a trench approximately three feet wide and approximately one foot deep below the cleared sampling location. Place excavated soils on plastic sheets. Trenches greater than five feet deep must be sloped or protected by a shoring system, as required by OSHA regulations.
- 4) Samples are taken using a trowel, scoop, or coring device at the desired intervals. Be sure to scrape the vertical face at the point of sampling to remove any soil that may have fallen from above, and to expose fresh soil for sampling. In many instances, samples can be collected directly from the backhoe bucket.
- 5) **If volatile organic analysis is to be performed, transfer the sample directly into an appropriate, labeled sample container using a T-handle sampler, in accordance with sampling Method 5035. This procedure is discussed in more detail in Section G.6.2.6 of this SOP. The VOC samples must be first set of sample containers filled during the sampling event.** If additional non-volatile sampling parameters are required, mix the remaining soil well and fill the sampling containers in a manner that allows for the most volatile samples (i.e. SVOCs) to be obtained first, followed by less volatile samples (i.e. metals or PCBs). If a composite soil sample is required across one particular sampling interval, place the remainder of the sample into a stainless steel, plastic, dedicated sealable bag, or other appropriate homogenization container, and mix thoroughly to obtain a homogenous sample representative of the entire sampling interval. Then, place the sample into appropriate, labeled containers and secure the caps tightly. If composite samples are to be collected from more than one sampling interval or location, place a sample from another sampling interval or location into the homogenization container and mix thoroughly. When compositing is complete, place the sample into appropriate, labeled containers and secure the caps tightly.

6) Record any additional information, such as sample depth, location, soil type, etc. Abandon the pit or excavation according to applicable state regulations. Generally, shallow excavations can simply be backfilled with the removed soil material.

G.6.2.6 Terra CoreTM Sampling Kit (VOC Soil Sampling)

Terra CoreTM Sampling Kit: When obtaining soil samples for volatile organic compound (VOC) analysis, the samples must be obtained using a Terra CoreTM Sampling Kit. The Terra CoreTM Sampling Kit contains the following:

- Two pre-weighed (tared) and labeled 40-mL VOA glass vial containing a magnetic stir bar and 5-mL of reagent (distilled) water. These containers will be utilized for low level VOC samples.
- One pre-weighed and labeled 40-mL VOA glass vial containing 5-mL of MeOH for medium to high level VOC samples.
- One empty, non-preserved, pre-weighed and labeled 40-mL VOA glass vial for percent moisture analysis.
- One, disposal Terra CoreTM T-handle plunger, which is designed to obtain a 5-gram plug of soil. The T-handle plunger is a disposable transfer tool, designed to easily take samples from hard packed soils and transfer them to the appropriate containers for in-field chemical preservation. The Terra CoreTM T-handle transfers soil samples as described in USEPA SW-846 Method 5035. The one T-handle plunger can be used to transfer all of the 5-gram soil plugs into the appropriate sample containers for that particular sampling interval. However, a new T-handle plunger must be utilized for any samples obtained for laboratory analysis from a different sampling interval.

All volatile soil samples, regardless of sampling technique and sample depth, must be collected and transferred to the Terra CoreTM sampling containers using the T-handle as soon as possible from the undisturbed sample (ideally within 5 minutes) after the undisturbed soil sample is collected. Under no circumstance can undisturbed soil samples which have already been transferred from the core sampler or sampling device (i.e. bucket of the excavator) to a secondary container (empty sample bottle, sealable plastic bag, aluminum foil, or sampling/mixing bowls) be utilized for VOC laboratory sample collection.

The steps for use of the Terra CoreTM Sampling Kit are as follows:

1) Have ready a tared 40ml glass VOA vial ready (the tarred vials will be pre-weighed by the laboratory prior to use and the pre-sample weights will already be recorded on the sample label). With the plunger seated in the handle, push the Terra Core into freshly exposed soil until the sample chamber is filled. A filled chamber will deliver approximately 5 grams of soil.

2) Wipe all soil or debris from the outside of the Terra Core™ sampler. The soil plug should be flush with the mouth of the sampler. Remove any excess soil that extends beyond the mouth of the sampler.

3) Immediately open the sample container and extrude the soil core into the sample container that will be submitted to the laboratory. Rotate the plunger that was seated in the handle top 90° until it is aligned with the slots in the body. Place the mouth of the sampler into the tared 40ml VOA vial containing the appropriate preservative, and extrude the sample by pushing the plunger down. Avoid splashing any preservative, if present, out of the sample container by holding the container at an angle while slowly extruding the soil core into the sample container. Do not immerse the sampling device into the preservative.

4) Quickly place the lid back on the tared 40ml VOA vial.

5) Fill the sample containers in the following order: low level (distilled water with a magnetic stir bar) first, medium to high level (methanol preserved) second, and percent moisture last.

Note: When capping the 40ml VOA vial, be sure to remove any soil or debris from the threads of the vial.

6) Ensure that all of the pertinent sampling information (sample ID, depth, sample date and time, etc.) is recorded on the sample label and in the field book. Place the filled and labeled sample container into a baggie for preservation in an ice filled cooler.

Note: If the tarred VOA vials are unpreserved. The sample method requires that the samples are to be cooled to 4°C and preserved at the lab within 48 hours of collection.

G.6.2.7 Non-VOC Soil Sample Collection

Following the collection of VOC soil samples, any analysis required that does not require the preservation of volatiles will follow this method:

- 1) Have ready the appropriate sample containers (e.g. 2 or 4 oz jars).
- 2) Mix the remaining soil well and fill the sample container and close the sample container with the supplied lid.
- 3) Clean any excess soil from the outside of the sample container and apply the completed sample container label.
- 4) Place the filled and labeled sample container into a baggie for preservation in an ice filled cooler.
- 5) If composite samples are being obtained, place a representative mixture of soil from the sample interval into a baggie and mix thoroughly by hand. This should adequately mix the sample to obtain a representative sample from the entire sample interval for Non-VOC laboratory analysis.
- 6) Fill the sample container from the soils within the baggie and close the sample container with the supplied lid.

- 7) Clean any excess soil from the outside of the sample container and apply the completed sample container label.
- 8) Place the filled and labeled sample container into a baggie for preservation in an ice filled cooler.

It should be noted that all non-volatile soil samples can only be obtained **after** the VOC soil sampling activities have been completed.

SOP G.7 Quality Assurance/Quality Control

There are no specific quality assurance (QA) activities which apply to the implementation of these procedures. However, the following QA procedures apply:

1. All data must be documented on field data sheets or within site logbooks.
2. All instrumentation must be operated in accordance with operating instructions as supplied by the manufacturer, unless otherwise specified in the work plan. Equipment checkout and calibration activities must occur prior to sampling/operation, and they must be documented.

SOP G.8 Health and Safety

When working with potentially hazardous materials, follow the site specific Health & Safety Plan.

SOP G.9 References

Mason, B.J. 1983. Preparation of Soil Sampling Protocol: Technique and Strategies. EPA-600/4-83-020. Barth, D.S. and B.J. Mason. 1984. Soil Sampling Quality Assurance User's Guide. EPA-600/4-84-043.

U.S. Environmental Protection Agency. 1984 Characterization of Hazardous Waste Sites - A Methods Manual: Volume II. Available Sampling Methods, Second Edition. EPA-600/4-84-076.

de Vera, E.R., B.P. Simmons, R.D. Stephen, and D.L. Storm. 1980. Samplers and Sampling Procedures for Hazardous Waste Streams. EPA-600/2-80-011.

ASTM D 1586-98, ASTM Committee on Standards, Philadelphia, PA.

**SOP Group H
Standard Operating Procedures
For Sample Preservation, Storage, Handling and Field COC Documentation**

TABLE OF CONTENTS

Introduction..... 1

SOP H.1 Method Summary 1

SOP H.2 Sample Preservation, Containers, Handling and Storage..... 1

H.2.1 Sample Preservation and Storage..... 1

H.2.2 Chain-of-Custody Procedures..... 2

H.2.2.1 Sample Custody..... 2

H.2.2.2 Field Custody..... 2

H.2.2.3 Transfer of Custody and Shipment..... 3

SOP H.3 Interferences and Potential Problems..... 3

SOP H.4 Equipment/Apparatus 4

SOP H.5 Reagents 4

SOP H.6 Procedures 4

LIST OF TABLES

Examples of sample containers, hold times, and preservatives by parameter and matrix.....5

LIST OF FIGURES

Chain-of-Custody Record.....7

SOP Group H Standard Operating Procedures For Sample Preservation, Storage, Handling and Field COC Documentation

Introduction

The purpose of this Standard Operating Procedure (SOP) is to provide general guidelines for the preservation, storage, and handling of water and soil/sediment samples. Requirements for sample volume, matrix spike/matrix spike duplicate (MS/MSD) sample volume, container type, and preservation techniques for sample preservation, storage, and handling must be established in the work plan prior to sample collection.

The methods described in this SOP are typically applicable operating procedures which may be varied or changed as required, dependent upon site conditions or equipment limitations. In all instances, the procedures employed should be documented in the site logbook and associated with the final report.

Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

SOP H.1 METHOD SUMMARY

Proper techniques of preserving, storing, and handling water and soil/sediment samples are critical if the integrity of the samples are to be maintained. This SOP is applicable to all water and soil/sediment samples collected in Indiana.

SOP H.2 SAMPLE PRESERVATION, CONTAINERS, HANDLING, AND STORAGE

SOP H.2.1 Sample Preservation and Storage

Samples should be collected using equipment and procedures appropriate to the matrix, the parameters to be analyzed, and the sampling objective. The volume of the sample collected must be sufficient to perform the analysis requested, as well as the quality assurance/quality control requirements.

Table 1 contains examples of parameters which are typically of interest in environmental site investigations and indicates the required sample volume, the proper types of containers, and the preservation method for water and soil/sediment samples. Note that the majority of the samples must be cooled to $\leq 4^{\circ}\text{C}$ from the time of collection until analysis. Table 1 provides an example of typical sample volumes, container types, and preservation methods but these items should be verified with the laboratory before ordering and obtaining the samples.

Depending on the arrangements for sample analysis and the amount of sample required for the analysis, it is possible that aliquots for several analyses may be taken from the same sample container. This should be verified with the laboratory performing the analyses prior to sample collection.

All sample containers must be clean and labeled appropriately. The exterior of the sample containers must be wiped clean and dry prior to sample packaging. All samples must be packaged according to the requirements of U.S. Environmental Protection Agency (USEPA) or Indiana Department of Environmental Management (IDEM).

For more information regarding water and soil/sediment sample collection, refer to the Procedures section of the appropriate SOP. Sample containers must not be pre-rinsed with the sample prior to sample collection. When a preservative other than cooling is used, the proper amount of preservative should already be present in the laboratory-supplied containers.

The laboratory performing the analysis should be contacted to confirm the requirements for sample volumes, container types, and preservation techniques. This information should be documented in the work plan.

SOP H.2.2 Chain-of-Custody Procedures

In some instances, it may be necessary to prove any analytical data offered into evidence accurately represent environmental conditions existing at the time of sample collection. Due to the evidentiary nature of such samples, possession must be traceable from the time the samples are collected until they are introduced as evidence in legal proceedings. It must be clearly demonstrated that none of the involved samples could have been tampered with during collection, transfer, storage, or analysis.

To maintain and document sample possession, the following chain-of-custody procedures are followed:

SOP H.2.2.1 Sample custody

A sample is under custody if: a) It is in your possession, or b) It is in your view, after being in your possession, or c) It was in your possession and then you locked it up or placed it in a sealed container to prevent tampering, or d) It is in a designated secure area.

SOP H.2.2.2 Field custody

a) Advise laboratory personnel at the time a decision is made that a sample requiring a chain-of-custody record is going to be collected. Specify the data and time that it will arrive in the laboratory. In instances where it is not known in advance of field trip, the laboratory should be notified as soon as possible about the arrival of such samplers.

b) In collecting samples for evidence, collect only that number which provides a good representation of the medium being sampled. To the extent possible, the quantity and type of samples and sample locations are determined prior to the actual field work. As few people as possible should handle the samples.

c) The samples must be collected in accordance with required and established methods.

SOP H.2.2.3 Transfer of custody and shipment

- a) To establish the documentation necessary to trace sample possession, a Chain-of-Custody Record (Figure 1) must be filled out and accompany each set of samples. The record should accompany the samples to the laboratory. This record documents sample custody transfer from the sampler to the analyst at the laboratory. At a minimum, the record should contain: the sampling location or sample identification; the signature of the collector; the date and time of collection; place and address of collection; substance sample; signature of persons involved in the chain of possession; and, inclusive dates of possession.
- b) Samples will be packaged properly for shipment and dispatched to the appropriate laboratory for analysis. The samples for each shipping container should be placed in a large plastic bag and should be sealed with a paper seal to indicate for possible tampering.
- c) Each transfer of sample custody must be documented on the Chain-of-Custody Record; however, when the sample is to be sealed for shipment, the word "sealed" should be written after the collector's signature. Then received in the laboratory, the word "sealed" should be written after the recipient's signature if no tampering has occurred.
- d) All shipments will be accompanied by the Chain-of-Custody Record identifying its contents. The original record will accompany the shipment, and a copy will be retained by the project leader.
- e) The laboratory should have an assigned laboratory custodian and an alternate who are responsible for overseeing the reception of all controlled custody samples. Controlled custody samples will be of the highest priority and will be analyzed before all other environmental samples.
- f) In the field and in the laboratory, the number of individuals having access to these samples should be kept to a minimum to lessen the number of potential witnesses. Then the samples are not in the immediate possession of the individual having official custody, they must be kept in a locked enclosure.

SOP H.3 INTERFERENCES AND POTENTIAL PROBLEMS

The following are interferences or potential problems associated with sample preservation, storage, and handling:

- Samples should be protected from sunlight which may initiate photodegradation of sample components.
- Delaying sample preservation may cause chemical reactions to occur, altering original sample composition.
- Improper sample preservation may adversely affect analytical results.
- Inadequate sample volume may prohibit the appropriate analyses from being performed.

- Samples can become contaminated if they come in contact with human flesh; therefore, appropriate protective gloves (i.e., rubber, latex, or plastic) should be worn at all times during sampling collection and preservation.
- Samples can also become contaminated from equipment used to collect and preserve the sample; therefore, all sample collection and preservation equipment must be kept clean.

SOP H.4 EQUIPMENT/APPARATUS

The equipment/apparatus required to collect samples must be determined on a site-specific basis. Refer to the specific SOPs for sampling techniques, which include lists of the equipment/apparatus required for sampling.

In general, the following specific equipment/apparatus may be required for proper sample preservation:

- t-handle samplers
- plastic baggies and packaging
- safety equipment
- glass and plastic bottles (various sizes)
- preservatives (acids, bases, and/or ice)

SOP H.5 REAGENTS

Reagents required for preservation of samples are specified in Table 1. The preservatives required are specified by the analyses to be performed.

SOP H.6 PROCEDURES

Check with the analytical lab to determine which sample container and preservative are required for each analysis. Utilize laboratory provided sample containers which have previously had preservative added to the appropriate sample container. Once aqueous samples are collected, then immediately cool samples to $\leq 4^{\circ}\text{C}$.



Table 1

METHOD HOLD TIME, CONTAINER AND PRESERVATION GUIDE

PBSH-INDIAN METHODS

Parameter	Matrix	Container	Preservative	Max Hold Time
2,3,7,8-TCDF	Soil	4oz Glass Jar		30/40 Days
2,3,7,8-TCDD	Water			30/40 Days
Acidity	Water			14 Days
Alkalinity	Water			14 Days
Alpha-Emitting Radionuclides	Water		HNO ₃	180 Days
Anions by IC, including Br, Cl, F, NO ₂ , NO ₃ , SO ₄	Water			Br, Cl, F, SO ₄ (28 Days) NO ₂ , NO ₃ (48 Hours)
Aromatic and Halogenated Volatiles	Soil	500ml wall Nit or 4oz Jar		14 Days
Aromatic and Halogenated Volatiles	Water		HCl, Na ₂ S ₂ O ₃	14 Days
Bacteria, Total Plate Count	Water		Na ₂ S ₂ O ₃	24 Hours
Base/Neutrals and Acids	Soil	4oz Glass Jar		14/40 Days
Base/Neutrals and Acids	Water		HCl, Na ₂ S ₂ O ₃	7/40 Days
Base/Neutrals, Acids & Pesticides	Water		HCl, Na ₂ S ₂ O ₃	7/30 Days
BOD/GBOD	Water			48 Hours
BTEX Total Hydrocarbons	Air	Summa Canister		14 Days
BTEX Total Hydrocarbons	Air	Tedlar Bag		48 Hours
Chloride	Water			28 Days
Chlorinated Herbicides	Soil	4oz Glass Jar		14/48 Days
Chlorinated Herbicides	Water		HCl, Na ₂ S ₂ O ₃	14/28 Days
Chlorine, Residual	Water			Analyze within 15 minutes
COB	Water		H ₂ SO ₄	28 Days
Color	Water			48 Hours
Condensable Particulate Emissions	Air	Solutions		6 Months
Cyanide, Reactive	Water			28 Days
Cyanide, Total and Amenable	Water		NaOH	14 Days; 24 Hours if Sulfide present
Diesel Range Organics	Soil	4oz Glass Jar		14/40 Days
Diesel Range Organics	Water			7/40 Days
Dioxins & Furans	Air	PUF		30/45 Days
EDB & DBCP	Water		HCl, Na ₂ S ₂ O ₃	14 Days
Explosives	Water			7/40 Days
Explosives	Soil	4oz Glass Jar		14/40 Days
Ferrous Iron	Water			Immediate
Flashpoint/Ignitability	Water			28 Days
Fluoride	Water			28 Days
Gamma Emitting Radionuclides	Water		HNO ₃	180 Days
Gas Range Organics	Water		HCl	14 Days
Gasoline Range Organics	Soil	500ml wall Nit or 4oz Jar		14 Days
Gross Alpha (N/A 48hr Method)	Water		HNO ₃	48 Hrs
Gross Alpha and Gross Beta	Water		HNO ₃	180 Days
Halocetic Acids	Water		NH ₄ Cl	14/7 Days
Hardness, Total (CaCO ₃)	Water		HNO ₃	6 Months
Hexavalent Chromium	Water		50% NaOH	24 Months
Hydrogen Halide & Halogen Emissions	Air	Solutions		6 Months
Lead Emissions	Air	Filter/Solutions		6 Months
Low Level Mercury	Water		EDC	90 Days (if preserved and oxidized)
Mercury	Soil	4oz Glass Jar		28 Days
Mercury	Water		HNO ₃	28 Days
Metals	Air	Filters		6 Months
Metals	Soil	4oz Glass Jar		6 Months
Metals (and other elements)	Water		HNO ₃	6 Months
Methane Ethane & Ethylene	Water		HCl	14 Days
Methane Ethane Ethylene	Air	Summa Canister		14 Days
Methane Ethane Ethylene	Air	Tedlar Bag		48 Hours
Nitrogen Ammonia	Water		H ₂ SO ₄	28 Days



Table 1 (continued)

Parameter	Matrix	Container	Preservative	Max Hold Time
Nitrogen, Kjeldahl	Water		H ₂ SO ₄	28 Days
Nitrogen, Nitrate	Water			48 Hours
Nitrogen, Nitrate & Nitrite	Water		H ₂ SO ₄	28 Days
Nitrogen, Nitrite	Water			48 Hours
Nitrogen, Organic	Water		H ₂ SO ₄	28 Days
Non-Methane Organics	Air	Summa Canister		14 Days
Non-Methane Organics	Air	Tedlar Bag		48 Hours
Odor	Water			24 Hours
Oil and Grease/HEM	Water		H ₂ SO ₄	28 Days
Organochlorine Pesticides and PCB's	Water		HCl, Na ₂ S ₂ O ₃	7/40 Days
Organochlorine Pesticides & PCBs	Air	PUF		7/40 Days
Organochlorine Pesticides and PCB's	Water		HCl, Na ₂ S ₂ O ₃	7/40 Days
Organochlorine Pesticides and PCBs	Soil	4oz Glass Jar		14/40 Days
Organophosphorous Pesticides	Soil	4oz Glass Jar		14/40 Days
Organophosphorous Pesticides	Water		HCl, Na ₂ S ₂ O ₃	7/40 Days
Oxygen, Dissolved (Probe)	Water			Analyze within 15 minutes
Paint Filter Liquid Test	Water			N/A
Particulates	Air	Filters		6 Months
Permanent Gases	Air	Summa Canister		14 Days
Permanent Gases	Air	Tedlar Bag		48 Hours
pH	Water			Analyze within 15 minutes
Phenol, Total	Water		H ₂ SO ₄	28 Days
Phosphorus, Orthophosphate	Water			Filter within 15 minutes, Analyze within 48 Hours
Phosphorus, Total	Water		H ₂ SO ₄	28 Days
Polynuclear Aromatic Hydrocarbons	Air	PUF		7/40 Days
Polynuclear Aromatic Hydrocarbons	Soil	4oz Glass Jar		14/40 Days
Polynuclear Aromatic Hydrocarbons	Water		HCl, Na ₂ S ₂ O ₃	7/40 Days
Radioactive Strontium	Water		HNO ₃	180 days
Radium-226 Radon Emanation Technique	Water		HNO ₃	180 days
Radium-228	Water		HNO ₃	180 days
Silica, Dissolved	Water			28 Days
Solids, Settleable	Water			48 Hours
Solids, Total	Water			7 Days
Solids, Total Dissolved	Water			7 Days
Solids, Total Suspended	Water			7 Days
Solids, Total Volatile	Water			7 Days
Specific Conductance	Water			28 Days
Stationary Source Dioxins & Furans	Air	XAD Trap		30/45 Days
Stationary Source Mercury	Air	Filters		6 Months, 28 Days for Hg
Stationary Source Metals	Air	Filters		6 Months, 28 Days for Hg
Stationary Source PM10	Air	Filters		6 Months
Stationary Source Particulates	Air	Filter/Solutions		6 Months
Sulfate	Water			28 Days
Sulfide, Reactive	Water			28 Days
Sulfide, Total	Water		NaOH, ZnOAc	7 Days
Sulfite	Water			Analyze within 15 minutes
Surfactants	Water			48 Hours
Total Organic Carbon (TOC)	Water		H ₂ SO ₄ or HCl	28 Days
Total Organic Halogen (TOX)	Water			14 Days
Tritium	Water		HNO ₃	180 days
Turbidity	Water			48 Hours
Uranium Radiochemical Method	Water		HNO ₃	180 days
Volatiles	Air	Summa Canister		14 Days
Volatiles	Air	Tedlar Bag		48 Hours
Volatiles	Air	Summa Canister		14 Days
Volatiles	Air	Tedlar Bag		48 Hours
Volatiles	Air	Summa Canister		14 Days
Volatiles	Soil	5035 vial kit or 4oz jar		14 days
Volatiles	Water		HCl	14 Days
Volatiles	Water		HCl	14 Days (7 unpreserved)

Figure 1. Typical Chain-of-Custody Record

Chain-of-Custody Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY - Affix Workorder/Login Label Here or List Pace Workorder Number or MTIL Log-in Number Here

Company:	Pace Analytical													
Address:	Billing Information:													
Report To:	Email To:													
Copy To:	Site Collection Info/Address:													
Customer Project Name/Number:	State: / County/City:		Time Zone Collected: JPT JMT JCT JET											
Phone:	Site/Facility ID #:													
Email:	Compliance Monitoring? Yes No													
Collected By (print):	Purchase Order #:	DW PWS ID #:												
Collected By (signature):	Quote #:	Turnaround Date Required: Immediately Packed on Ice: Yes No Field Filtered (if applicable): Yes No												
Sample Disposal: Dispose as appropriate Return Archive: Hold:	Rush: Same Day Next Day 2 Day 3 Day 4 Day 5 Day (Expedite Charges Apply)													
* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Wastewater (WW), Product (P), Soil/Solid (SL), Oil (OL), Wipe (WP), Air (AR), Tissue (TS), Bioassay (B), Vapor (V), Other (OT)														
Customer Sample ID	Matrix *	Comp / Grab	Collected for Composite Start Date	Composite End Date	Wet	Blue	Dry	None	Res CI	# of Cins				
Customer Remarks / Special Conditions / Possible Hazards:														
Type of Ice Used:			Wet			Blue			Dry			None		
Packing Material Used:														
Radchem sample(s) screened (<500 cpm): Y N NA														
Date/Time:		Received by/Company: (Signature)		Date/Time:		Received by/Company: (Signature)		Date/Time:		Received by/Company: (Signature)		Date/Time:		
Date/Time:		Received by/Company: (Signature)		Date/Time:		Received by/Company: (Signature)		Date/Time:		Received by/Company: (Signature)		Date/Time:		
Date/Time:		Received by/Company: (Signature)		Date/Time:		Received by/Company: (Signature)		Date/Time:		Received by/Company: (Signature)		Date/Time:		
SHORT HOLDS PRESENT (<72 hours): Y N N/A Lab Tracking #: Samples received via: FEDEX UPS Client Courier Pace Courier Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time: Date/Time:														
LAB Sample Temperature Info: Temp Blank Received: Y N NA Therm ID#: _____ Cooler 1 Temp Upon Receipt: ____ °C Cooler 1 Therm Corr. Factor: ____ °C Cooler 1 Corrected Temp: ____ °C Comments: _____														
Trip Blank Received: Y N NA HCL MeOH TSP Other Non Conformance(s): YES / NO Page: _____ of: _____														
Lab Sample Receipt Checklist: Custody Seals Present/Intact Y N NA Custody Signatures Present Y N NA Collector Signatures Present Y N NA Bottles Intact Y N NA Correct Bottles Y N NA Sufficient Volume Y N NA Samples Received on Ice Y N NA VOA - Headspace Acceptable Y N NA USDA Regulated Soils Y N NA Samples in Holding Time Y N NA Residual Chlorine Present Y N NA Cl Strips: Y N NA Sample pH Acceptable Y N NA pH Strips: Y N NA Sulfide Present Y N NA Lead Acetate Strips: _____ LAB USE ONLY: Lab Sample # / Comments:														